

This is to certify that the thesis entitled

## CHARACTERIZATION OF TRUCK TRAFFIC IN MICHIGAN FOR THE NEW MECHANISTIC EMPIRICAL PAVEMENT DESIGN GUIDE

presented by

Joel Thomas Brown

has been accepted towards fulfillment of the requirements for the

M.S. degree in Civil Engineering

Major Professor's Signature

Date

MSU is an Affirmative Action/Equal Opportunity Employer

# **PLACE IN RETURN BOX** to remove this checkout from your record. **TO AVOID FINES** return on or before date due. **MAY BE RECALLED** with earlier due date if requested.

DATE DUE	DATE DUE	DATE DUE
	5100 14 15	

5/08 K:/Proj/Acc&Pres/CIRC/DateDue.indd

## CHARACTERIZATION OF TRUCK TRAFFIC IN MICHIGAN FOR THE NEW MECHANISTIC EMPIRICAL PAVEMENT DESIGN GUIDE

### **VOLUME I**

Ву

Joel Thomas Brown

### A THESIS

Submitted to
Michigan State University
in partial fulfillment of the requirements
for the degree of

MASTER OF SCIENCE

Civil Engineering

2009

### **ABSTRACT**

## CHARACTERIZATION OF TRUCK TRAFFIC IN MICHIGAN FOR THE NEW MECHANISTIC EMPIRICAL PAVEMENT DESIGN GUIDE

By

#### Joel Thomas Brown

The purpose of this thesis is to characterize truck traffic for the state of Michigan in terms of truck traffic distribution, axle groups per vehicle, axle load distribution factors, monthly distribution factors and hourly distribution factors to facilitate design in the new Mechanistic-Empirical Pavement Design Guide (M-E PDG). Weight and classification data was obtained from 44 weigh-in-motion (WIM) and classification stations found throughout the state to develop M-E PDG Level I (site-specific) traffic characteristics. Cluster analyses were then conducted to group sites with similar characteristics together for development of M-E PDG Level II (regional) data. Finally data from all sites were averaged to establish statewide M-E PDG Level III data. A sensitivity analysis using rigid and flexible pavement designs in the M-E PDG was then performed for these hierarchical traffic characteristics as well as M-E PDG defaults to determine the necessary data input level to achieve an acceptable level of accuracy in design. Additionally, the effect of length of collection period was also explored by statistically comparing traffic characteristics developed using one week per month data and continuous (year-round) data. Performance differences these traffic characteristics create were analyzed in the M-E PDG. For future construction sites in which Level II data is required, a discriminant analyses selection algorithm was created that utilizes the sites' properties to acquire the appropriate Level II traffic characteristic necessary for design.

## **ACKNOWLEDGEMENTS**

I would like to extend my sincere appreciation to Dr. Neeraj Buch and Dr. Syed Waqar Haider for their continued encouragement and direction throughout this endeavor. I would also like to recognize Mike Eacher, Mike Walimaki, Jim Kramer and Kevin Krzeminski at the Michigan Department of Transportation (MDOT) for their supply of information, maps, and knowledge regarding truck traffic and design in Michigan. Finally, I must thank Mom, Dad, Marissa and friends for their persistence and moral support towards helping me accomplish this project.

## **TABLE OF CONTENTS**

LIST OF TABLES	viii
LIST OF FIGURES	xv
LIST OF SYMBOLS	xx
LIST OF ABBREVIATIONS	xxiii
CHAPTER 1 - INTRODUCTION	1
CHAPTER 2 - LITERATURE REVIEW	7
2.1 TRAFFIC CHARACTERIZATION IN THE M-E PDG	7
2.2 EFFECT OF DATA COVERAGE ON DEVELOPMENT OF TRAFFIC	
CHARACTERISTICS	9
2.3 WIM AND CLASSIFICATION SENSOR OVERVIEW	10
2.3.1 WIM and Classification Equipment Used in the State of Michigan	10
2.3.2 Error Sources	16
2.3.3 Quality Control	19
2.3.4 Count Programs	22
2.3.4.a Uses and Output of Count Programs	23
2.3.4.b Short-Duration Count Program	24
2.3.4.c Continuous Count Program	26
2.3.4.d Continuous Volume Count Program	
2.3.4.e Continuous Classification Count Program	
2.3.4.f Continuous Weight Count Program	31
2.3.4.g Administrative Efforts	
2.4 OVERVIEW OF TRAFFIC CHARACTERIZATION PATTERNS	
2.4.1 Traffic Characterization	
2.4.1.a Truck Traffic Classification	
2.4.1.b Monthly Distribution Factor	
2.4.1.c Hourly Distribution Factor	
2.4.1.d Axle Load Spectra	
2.5 EFFECT OF TRAFFIC CHARACTERISTICS IN DESIGN	45
CHAPTER 3 - METHODOLOGY	
3.1 DATA COLLECTION AND PROCESSING	
3.1.1 Review of Existing Data Collection Sites	
3.1.2 Processing of Raw Data in TrafLoad	
3.1.3 Conversion of Sites Into Traffic Characterizations	
3.1.4 Data Quality Control Review	52
3.2 IDENTIFICATION OF NECESSARY ELEMENTS FOR TRAFFIC	
CHARACTERIZATION	57
3.3 ONE WEEK PER MONTH VS CONTINUOUS DATA	
3.3.1 Manipulation of Traffic Characterization Data for Comparison	59

3.3.1.a Average Annual Daily Truck Traffic	60
3.3.1.b Truck Traffic Classification	60
3.3.1.c Monthly Distribution Factor	61
3.3.1.d Hourly Distribution Factor	61
3.3.1.e Axle Groups Per Vehicle	62
3.3.1.f Axle Load Distributions	62
3.3.2 Traffic Input and M-E PDG Performance Comparison	63
3.3.2.a Traffic Input Comparison	
3.3.2.b M-E PDG Performance Comparison	63
3.4 FORMATION OF TRAFFIC CHARACTERIZATION CLUSTERS	67
3.4.1 Hierarchical Cluster Analysis Overview	
3.4.2 Hierarchical Cluster Analysis Procedure	
3.4.3 Clustering Example with TTC	
3.4.4 Practical Significance of Developed Traffic Characterizations	
3.5 DISCRIMINANT ANALYSIS PROCEDURE	76
CHAPTER 4 - RESULTS AND DISCUSSIONS	
4.1 SELECTION OF FINAL SITES FOR ANALYSES	93
4.2 IDENTIFICATION OF NECESSARY ELEMENTS FOR TRAFFIC	
CHARACTERIZATION	95
4.3 EFFECT OF DATA COVERAGE BETWEEN OWPM AND	
CONTINUOUS DATA	
4.3.1 Traffic Input Differences	
4.3.2 Statistical Significance of M-E PDG Rigid Output	
4.3.3 Statistical Significance of M-E PDG Flexible Output	
4.3.3.a Performance Life Based on Rutting	
4.3.3.b Performance Life Based on Fatigue Cracking	
4.3.3.c Summary	107
4.4 TRAFFIC CHARACTERIZATION DEVELOPMENT	
4.4.1 Average Annual Daily Truck Traffic	
4.4.2 Truck Traffic Classification	
4.4.3 Monthly Distribution Factors	
4.4.4 Hourly Distribution Factors	
4.4.5 Axle Groups per Vehicle (AGPV)	
4.4.6 Single Axle Load Spectra	
4.4.7 Tandem Axle Load Spectra	
4.4.8 Tridem Axle Load Spectra	
4.4.9 Quad Axle Load Spectra	
4.5 IMPACT OF TRAFFIC CHARACTERIZATIONS IN THE M-E PDG	
4.5.1 Rigid Pavement Analyses	124
4.5.1.a Truck Traffic Classification	
4.5.1.b Monthly Distribution Factor	
4.5.1.c Hourly Distribution Factor	
4.5.1.d Axle Groups per Vehicle	
4.5.1.e Single Axle Load Spectra	
4.5.1.f Tandem Axle Load Spectra	130

4.5.1.g Tridem Axle Load Spectra	132
4.5.1.h Quad Axle Load Spectra	
4.5.2 Flexible Pavement Analysis	
4.5.2.a Truck Traffic Classification	135
4.5.2.b Monthly Distribution Factor	136
4.5.2.c Hourly Distribution Factor	138
4.5.2.d Axle Groups Per Vehicle	
4.5.2.e Single Axle Load Spectra	
4.5.2.f Tandem Axle Load Spectra	140
4.5.2.g Tridem Axle Load Spectra	142
4.5.2.h Quad Axle Load Spectra	143
4.5.2.i Summary	145
4.6 SELECTION OF APPROPRIATE TRAFFIC CHARACTERIZATION	150
4.6.1 Truck Traffic Classification	151
4.6.2 Hourly Distribution Factor	154
4.6.3 Tandem Axle Load Spectra	158
4.6.4 Summary and Use of Discriminant Analysis	161
CHAPTER 5 - CONCLUSIONS AND RECOMMENDATIONS	162
5.1 EFFECT OF DATA COVERAGE ON TRAFFIC CHARACTERIZATIOn	
DEVELOPMENT	162
5.2 TRAFFIC ELEMETS IN THE M-E PDG UTILIZED FOR	
HIERARCHICAL CHARACTERIZATION	
5.3 TRAFFIC CHARACTERIZATION DEVELOPMENT	
5.4 TRAFFIC CHARACTERIZATION FOR DESIGN	168
5.5 SELECTION OF APPROPRIATE LEVEL II TRAFFIC	
CHARACTERIZATION FOR DESIGN	173
5.6 EXPANSION OF DATA COVERAGE TO FACILITATE IMPROVED	
TRAFFIC CHARACTERZATION WITHIN THE STATE	174
5.6 RECOMMENDATIONS FOR FURTHER RESEARCH	176
APPENDIX A	178
APPENDIX B	202
APPENDIX C	262
APPENDIX D	265
APPENDIX E	269
APPENDIX F	273
APPENDIX G	277
APPENDIX H	292

APPENDIX I	
REFERENCES	348

## LIST OF TABLES

Table 2-1. Traffic data required for the three M-E PDG input levels
Table 2-2. Strengths and Drawbacks of Perm. WIM and Classification Sensors in MI 13
Table 2-3. Strengths and Drawbacks of Portable Classification and WIM Technology 15
Table 2-4. Potential Classification Error Checks and Sources
Table 2-5. FHWA Vehicle Classes
Table 2-6. Actual HDF Default Values in the M-E PDG41
Table 3-1. Summary of WIM Data Extent
Table 3-2. Summary of Classification Data Extent for TrafLoad-Validated Sites 50
Table 3-3. Quantity of Processed Continuous Weight and Classification Data 51
Table 3-4. Quantity of Processed One Week Per Month Weight and Classification Data52
Table 3-5. Typical Axle Load Limit and Gross Vehicle Weight Limit
Table 3-6. Traffic Data Required for the Three M-E PDG Input Levels 57
Table 3-7. Rigid Base Design for M-E PDG Analyses
Table 3-8. Flexible Base Design for M-E PDG Analyses
Table 3-9. Euclidean Distance Calculation Between Site 8229 and Site 5019 70
Table 3-10. Computation of Sum of Squares for First TTC Cluster
Table 3-11. Traffic Characteristics Created and Compared in M-E PDG
Table 3-12. Wilks' Lambda Results for Predictor Variables used in Single Axle Load Spectra Cluster
Table 3-13. Eigenvalue and Canonical Correlation for HDF Discriminant Functions 84
Table 3-14. Wilk's Lambda Test for Significance of Model
Table 3-15. Standardized Canonical Discriminant Function Coefficients
Table 3-16. Regression Coefficients Created by SPSS

Table 3-17. Fisher's Linear Discriminant Coefficients for HDF Variable
Table 3-18. Classified Sites into HDF Clusters Through Discriminant Analysis 92
Table 4-1. Quantity of Weight and Classification Data for One Week Per Month and Continuous Data
Table 4-2. Summary Statistics of the MDOT WIM and Classification Sites95
Table 4-3. Statistical Analysis Results for Difference in Traffic Characterizations Using OWPM and Continuous Data
Table 4-4. Statistical Summary of Difference in the M-E PDG Rigid Performance Life (in yrs) when Using OWPM vs. Continuous Data
Table 4-5. Paired <i>t</i> -test Between Continuous and OWPM Data for Rigid Pavement Performance Difference
Table 4-6. One-Way ANOVA Results for Difference in Means for Rigid Pavement 101
Table 4-7. Tukey's Contrast Test for Testing Differences of Means Within Groups 102
Table 4-8. Statistical Summary of Difference in the M-E PDG Flexible Performance Life (Rutting) (in yrs) when Using OWPM vs. Continuous Data
Table 4-9. Paired <i>t</i> -test Result for Difference in Performance Life between OWPM and Continuous Based on Rutting for Flexible Pavement
Table 4-10. One-Way ANOVA Results for Difference in Means Based on Rutting for Flexible Pavement
Table 4-11. Statistical Summary of Difference in the M-E PDG Flexible Performance Life (in yrs) Based on Fatigue Cracking when Using OWPM vs. Continuous Data
Table 4-12. Statistical Summary of Difference in the M-E PDG Flexible Performance Life Based on Fatigue Cracking when Using OWPM vs. Continuous Data Type
Table 4-13. One-Way ANOVA Results for Difference in Means Based on Fatigue  Cracking for Flexible Pavement
Table 4-14. Established AADTT Levels
Table 4-15 Impact Designation for the M-F PDG Results

Table 4-16.	Descriptive Statistics and ANOVA Results for TTC Hierarchical Characterization Performance Life Differences in Rigid Pavement 125
Table 4-17.	Descriptive Statistics and ANOVA Results for MDF Hierarchical Characterization Performance Life Differences in Rigid Pavement 126
Table 4-18.	Descriptive Statistics and ANOVA Results for HDF Hierarchical Characterization Performance Life Differences in Rigid Pavement 127
Table 4-19.	Descriptive Statistics and ANOVA Results for HDF Hierarchical Characterization Performance Life Differences in Rigid Pavement 128
Table 4-20.	Descriptive Statistics and ANOVA Results for Single Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement
Table 4-21.	Descriptive Statistics and ANOVA Results for Tandem Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement
Table 4-22.	Descriptive Statistics and ANOVA Results for Tridem Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement
Table 4-23.	Descriptive Statistics and ANOVA Results for Quad Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement
Table 4-24.	Pavement Life Difference Descriptive Statistics and <i>t</i> -test Based on Rutting and Fatigue Cracking for TTC Characterizations
Table 4-25.	Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for MDF Characterizations
Table 4-26.	Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for AGPV Characterizations
Table 4-27.	Pavement Life Difference Descriptive Statistics and <i>t</i> -test Based on Rutting and Fatigue Cracking for Single Axle Load Distribution Characterizations
Table 4-28.	Pavement Life Difference Descriptive Statistics and <i>t</i> -test Based on Rutting and Fatigue Cracking for Tandem Axle Load Distribution Characterizations

Table 4-29.	Pavement Life Difference Descriptive Statistics and <i>t</i> -test Based on Ruttin and Fatigue Cracking for Tridem Axle Load Distribution Characterization	ns
Table 4-30.	Pavement Life Difference Descriptive Statistics and <i>t</i> -test Based on Ruttin and Fatigue Cracking for Tridem Axle Load Distribution Characterization	ns
Table 4-31.	Cluster TTC Averages	146
Table 4-32.	Statewide MDF Averages	146
Table 4-33.	HDF Cluster and Statewide Averages	147
Table 4-34.	AGPV Statewide Averages	148
Table 4-35.	Eigenvalue and Canonical Correlation for TTC Discriminant Functions	151
Table 4-36.	Wilk's Lambda Test for Significance of Model	152
Table 4-37.	Standardized Canonical Discriminant Function Coefficients	152
Table 4-38.	Fisher's Linear Discriminant Coefficients for TTC Variable	153
Table 4-39.	Classified Sites into TTC Clusters Through Discriminant Analysis	154
Table 4-40.	Eigenvalue and Canonical Correlation for HDF Discriminant Functions	154
Table 4-41.	Wilk's Lambda Test for Significance of HDF Model	155
Table 4-42.	Standardized Canonical Discriminant Function Coefficients for HDF Mod	
Table 4-43.	Fisher's Linear Discriminant Coefficients for HDF Variable	157
Table 4-44.	Classified Sites into HDF Clusters Through Discriminant Analysis	158
Table 4-45.	Eigenvalue and Canonical Correlation for Tandem Axle Load Spectra Discriminant Functions	158
Table 4-46.	Wilk's Lambda Test for Significance of Model	159
Table 4-47	Standardized Canonical Discriminant Function Coefficients	159

Table 4-48. Fisher's Linear Discriminant Coefficients for Tandem Axle Load Spectra Variable	
Table 4-49. Classified Sites into Tandem Axle Load Spectra Clusters Through Discriminant Analysis	161
Table 5-1. Impact Designation for the M-E PDG Results	168
Table 5-2. Impact of Characterized Traffic on M-E PDG Pavement Performance	172
Table A-1. Comprehensive MDOT WIM Sites for Weight and Traffic Recording	186
Table A-2. Comprehensive MDOT Classification Sites for Traffic Recording	190
Table A-3. Rigid Pavement ESAL and Pavement Thickness Values	191
Table A-4. Flexible Pavement ESAL and Pavement Thickness Values	192
Table A-5. Pearson Correlation Coefficients for Predictor Variables (1 of 2)	193
Table A-6. Pearson Correlation Coefficients for Predictor Variables (2 of 2)	195
Table A-7. Predictor Variable Values for All Sites (1 of 2)	198
Table A-8. Predictor Variable Values for All Sites (2 of 2)	200
Table B-1. Difference in AADTT between OWPM and Continuous Data	203
Table B-2. Difference in TTC between OWPM and Continuous Data	204
Table B-3. Difference in MDF between OWPM and Continuous Data	207
Table B-4. Difference in HDF between OWPM and Continuous Data	208
Table B-5. Difference in AGPV between OWPM and Continuous Data	209
Table B-6. Difference in Average Axle Load between OWPM and Continuous Data	222
Table B-7. Rigid Pavement Design Life Based on Percent Slabs Cracked (1 of 3)	228
Table B-8. Rigid Pavement Design Life Based on Percent Slabs Cracked (2 of 3)	230
Table B-9. Rigid Pavement Design Life Based on Percent Slabs Cracked (3 of 3)	232

Table B-10. Flexible Pavement Design Life Based on Fatigue Cracking (1 of 2) 234
Table B-11. Flexible Pavement Design Life Based on Fatigue Cracking (2 of 2) 230
Table B-12. Flexible Pavement Design Life Based on Rutting (1 of 2)
Table B-13. Flexible Pavement Design Life Based on Rutting (2 of 2)
Table B-14. Low AADTT Group
Table B-15. Medium AADTT Group
Table B-16. High AADTT Group
Table H-1. Statewide and Cluster Averages for Truck Traffic Classification
Table H-2. Statewide Monthly Distribution Factors (All Classes)
Table H-3. Cluster Average Monthly Distribution Factors for VC 4-7 294
Table H-4. Cluster Average Monthly Distribution Factors for VC 8-10
Table H-5. Cluster Average Monthly Distribution Factors for VC 11-13
Table H-6. Statewide, Cluster and M-E PDG Default Monthly Distribution Factors 296
Table H-7. Statewide, Cluster and M-E PDG Default Single Axle Groups per Vehicle 29
Table H-8. Statewide, Cluster and M-E PDG Default Tandem Axle Groups per Vehicle
Table H-9. Statewide, Cluster and M-E PDG Default Tridem Axle Groups per Vehicle
Table H-10. Statewide, Cluster and M-E PDG Default Quad Axle Groups per Vehicle 298
Table H-11. Statewide Single Axle Load Spectra
Table H-12. Cluster 1 Single Axle Load Spectra
Table H-13. Cluster 2 Single Axle Load Spectra
Table H-14. Cluster 3 Single Axle Load Spectra
Table H-15. M-E PDG Default Single Axle Load Spectra

Table H-16. Statewide Tandem Axle Load Spectra	
Table H-17. Cluster 1 Tandem Axle Load Spectra	
Table H-18. Cluster 2 Tandem Axle Load Spectra	
Table H-19. Cluster 3 Tandem Axle Load Spectra	
Table H-20. Cluster 4 Tandem Axle Load Spectra	
Table H-21. Cluster 5 Tandem Axle Load Spectra	
Table H-22. M-E PDG Default Tandem Axle Load Spectra	
Table H-23. Statewide Tridem Axle Load Spectra	
Table H-24. Cluster 1 Tridem Axle Load Spectra	
Table H-25. Cluster 2 Tridem Axle Load Spectra	
Table H-26. Cluster 3 Tridem Axle Load Spectra	
Table H-27. M-E PDG Default Tridem Axle Load Spectra	
Table H-28. Statewide Quad Axle Load Spectra	
Table H-29. Cluster 1 Quad Axle Load Spectra	
Table H-30. Cluster 2 Quad Axle Load Spectra	
Table H-31. Cluster 3 Quad Axle Load Spectra	
Table H-32. M-E PDG Default Quad Axle Load Spectra	
Table I-1 Cluster Grouping Matrix	

## **LIST OF FIGURES**

Figure 2-1. M-E PDG Default TTC Distributions
Figure 2-2. Default HDFs in the M-E PDG
Figure 3-1. Icicle Tree Cluster Diagram for TTC Traffic Characterization
Figure 3-2. Clustering Dendogram for TTC Traffic Characterization
Figure 3-3. MDOT Regions Within Michigan Utilized for Discriminant Analyses 79
Figure 3-4 Territorial Map for Classification of Dependent Variable
Figure 4-1. Compiled TTC Values
Figure 4-2. Compiled VC 4-7 MDF Values
Figure 4-3. Compiled VC 8-10 MDF Values
Figure 4-4. Compiled VC 11-13 MDF Values
Figure 4-5. Compiled HDF Values
Figure 4-6. Single Axle AGPV Cluster Values
Figure 4-7. Tandem AGPV Cluster Values
Figure 4-8. Tridem AGPV Cluster Values
Figure 4-9. Quad AGPV Cluster Values
Figure 4-10. Cluster Averages for All Single Axle Load Spectra
Figure 4-11. Cluster Averages for All Tandem Axle Load Spectra
Figure 4-12. Cluster Averages for All Tridem Axle Load Spectra
Figure 4-13. Cluster Averages for All Quad Axle Load Spectra
Figure B-1. AADTT Cluster Groupings
Figure B-2. TTCs for all Analyzed Sites
Figure B-3. TTCs for Cluster 1 (Class 9 Dominant)

Figure B-4. TTCs for Cluster 2 (Even Dominance)	245
Figure B-5. TTCs for Cluster 3 (Class 5 Dominant)	245
Figure B-6. VC 4-7 MDFs for all Analyzed Sites	246
Figure B-7. VC 4-7 MDFs for Cluster 1 (Month 6 Dominant)	246
Figure B-8. VC 4-7 MDFs for Cluster 2 (Month 11 Dominant)	247
Figure B-9. VC 4-7 MDFs for Cluster 3 (Month 4 Dominant)	247
Figure B-10. VC 4-7 MDFs for Cluster 4 (Month 2 Dominant)	248
Figure B-11. VC 4-7 MDFs for Cluster 5 (No Dominance)	248
Figure B-12. VC 4-7 MDFs for Cluster 6 (Summer Dominant)	249
Figure B-13. VC 4-7 MDFs for Cluster 7 (Summer/Fall Dominant)	249
Figure B-14. VC 8-10 MDFs for all Analyzed Sites	250
Figure B-15. VC 8-10 MDFs for Cluster 1 (Summer Dominant)	250
Figure B-16. VC 8-10 MDFs for Cluster 2	251
Figure B-17. VC 8-10 MDFs for Cluster 3	251
Figure B-18. VC 8-10 MDFs for Cluster 4 (Fall Dominant)	252
Figure B-19. VC 8-10 MDFs for Cluster 5 (Even Dominance)	252
Figure B-20. VC 11-13 MDFs for all Analyzed Sites	253
Figure B-21. VC 11-13 MDFs for Cluster 1 (Month 1 Dominant)	253
Figure B-22. VC 11-13 MDFs for Cluster 2 (Month 8 Dominant)	254
Figure B-23. VC 11-13 MDFs for Cluster 3 (Months 5/8 Dominant)	254
Figure B-24. VC 11-13 MDFs for Cluster 4 (Spring Dominant)	255
Figure B-25. VC 11-13 MDFs for Cluster 5 (Month 8/11Dominant)	255
Figure B-26. VC 11-13 MDFs for Cluster 6 (No Dominance)	256

Figure B-27. VC 11-13 MDFs for Cluster 7 (Summer Dominance)	256
Figure B-28. VC 11-13 MDFs for Cluster 8 (No Dominance)	257
Figure B-29. VC 11-13 MDFs for Cluster 9 (Summer Dominance)	257
Figure B-30. VC 11-13 MDFs for Cluster 10 (Peak Months 2/10)	258
Figure B-31. VC 11-13 MDFs for Cluster 11 (Peak Month 2)	258
Figure B-32. VC 11-13 MDFs for Cluster 12 (Indistinct)	259
Figure B-33. HDFs for all Analyzed Sites	260
Figure B-34. HDFs for Cluster 1 (Even Distribution)	260
Figure B-35. HDFs for Cluster 2 (Morning Dominant)	261
Figure B-36. HDFs for Cluster 3 (Midday Peak Distribution)	261
Figure C-1. All Single Axle LS for all Analyzed Sites.	263
Figure C-2. All Single Axle LS for Cluster 1	263
Figure C-3. All Single Axle LS for Cluster 2	264
Figure C-4. All Single Axle LS for Cluster 3	264
Figure D-1. All Tandem Axle LS for all Analyzed Sites	266
Figure D-2. All Tandem Axle LS for Cluster 1	266
Figure D-3. All Tandem Axle LS for Cluster 2	267
Figure D-4. All Tandem Axle LS for Cluster 3	267
Figure D-5. All Tandem Axle LS for Cluster 4	268
Figure D-6. All Tandem Axle LS for Cluster 5	268
Figure E-1. All Tridem Axle LS for all Analyzed Sites	270
Figure E-2. All Tridem Axle LS for Cluster 1	270
Figure E-3. All Tridem Axle LS for Cluster 2	271

Figure E-4. All Tridem Axle LS for Cluster 3	271
Figure E-5. All Tridem Axle LS for Cluster 4	272
Figure E-6. All Tridem Axle LS for Cluster 5	272
Figure F-1. All Quad Axle LS for all Analyzed Sites	274
Figure F-2. All Quad Axle LS for Cluster 1	274
Figure F-3. All Quad Axle LS for Cluster 2	275
Figure F-4. All Quad Axle LS for Cluster 3	275
Figure F-5. All Quad Axle LS for Cluster 4	276
Figure F-6. All Quad Axle LS for Cluster 5	276
Figure G-1. State Avg. vs. M-E PDG Default for Single VC4 LS	278
Figure G-2. State Avg. vs. M-E PDG Default for Single VC5 LS	278
Figure G-3. State Avg. vs. M-E PDG Default for Single VC6 LS	279
Figure G-4. State Avg. vs. M-E PDG Default for SingleVC7 LS	279
Figure G-5. State Avg. vs. M-E PDG Default for Single VC8 LS	280
Figure G-6. State Avg. vs. M-E PDG Default for Single VC9 LS	280
Figure G-7. State Avg. vs. M-E PDG Default for Single VC10 LS	281
Figure G-8. State Avg. vs. M-E PDG Default for Single VC11 LS	281
Figure G-9. State Avg. vs. M-E PDG Default for Single VC12 LS	282
Figure G-10. State Avg. vs. M-E PDG Default for Single VC13 LS	282
Figure G-11.State Avg. vs. M-E PDG Default for TandemVC4 LS	283
Figure G-12.State Avg. vs. M-E PDG Default for Tandem VC5 LS	283
Figure G-13. State Avg. vs. M-E PDG Default for TandemVC6 LS	284
Figure G-14. State Avg. vs. M-E PDG Default for TandemVC7 LS	284

Figure G-15. State Avg. vs. M-E PDG Default for Tandem VC8 LS	. 285
Figure G-16. State Avg. vs. M-E PDG Default for TandemVC9 LS	. 285
Figure G-17. State Avg. vs. M-E PDG Default for TandemVC10 LS	. 286
Figure G-18. State Avg. vs. M-E PDG Default for TandemVC12 LS	. 286
Figure G-19. State Avg. vs. M-E PDG Default for Tandem VC13 LS	. 287
Figure G-20. State Avg. vs. M-E PDG Default for Tridem VC7 LS	. 288
Figure G-21. State Avg. vs. M-E PDG Default for TridemVC10 LS	. 288
Figure G-22. State Avg. vs. M-E PDG Default for Tridem VC13 LS	. 289
Figure G-23. State Avg. vs. M-E PDG Default for Quad VC7 LS	. 290
Figure G-24. State Avg. vs. M-E PDG Default for QuadVC10 LS	. 290
Figure G-25. State Avg. vs. M-E PDG Default for Quad VC13 LS	. 291

## LIST OF SYMBOLS

A: arbitrary site name A

AADTT: average annual daily truck traffic

AGPV: axle groups per vehicle

ALS: frequency of axle load

AR: total amount of axles per load bin or vehicle class

ART: total amount of axles across all load bins

B: arbitrary site name B

c: continuous data

d: difference value

EE: electrical equipment truck percentage

FC: functional class

FF: furniture and fixtures truck percentage

*FMP*: fabricated metal product truck percentage

*FP*: food product truck percentage

g: vehicle group

h: hour of day

HVOL: hourly volume count

HVOLTOT: average hourly volume count total

i: vehicle class

*j*: axle type

k: number of vehicle classes within each group

*l*: load bin

#### Symbols (cont'd):

LLW: logs lumber and wood truck percentage

m: month of year

M: machinery truck percentage

MADTT: monthly average daily truck traffic

MADW: monthly average annual daily truck traffic by day of week

MALSW: monthly axle load frequency per load bin

MDF: monthly distribution factor

MM: machinery and manufactured products truck percentage

n: number of specific day of week within a given month

p: particular day of week within month

PP: paper and pulp products truck percentage

*PM*: printed matter truck percentage

R: region designation

RAT: roadway annual tonnage

RC: road class designation

*RP*: rubber and plastics truck percentage

t: total

TET: transportation equipment truck percentage

*TOTREP:* total axle repetitions per vehicle class

TOTVOL: total average volume count

TT: total tons

TTC: truck traffic classification distribution

## Symbols (cont'd):

*VC5*: vehicle class 5 percentage

VC9: vehicle class 9 percentage

VC10: vehicle class 10 percentage

VC13: vehicle class 13 percentage

w: day of week or one week per month data (OWPM)

x: number of days collected

y: number of vehicle records

z: counter variable

## LIST OF ABBREVIATIONS

AADT: Average Annual Daily Traffic

AADTT: Average Annual Daily Truck Traffic

AASHTO: American Association of State and Highway Transportation Officials

AGPV: Axle Groups Per Vehicle

ANOVA: Analysis of Variance

ATR: Automatic Traffic Recorder

AVC: Automatic Vehicle Classification

CI: Confidence Interval

**DOT:** Department of Transportation

ESAL: Equivalent Single Axle Load

FHWA: Federal Highway Administration

GVW: Gross Vehicle Weight

HDF: Hourly Distribution Factor

IRI: International Roughness Index

ITS: Intelligent Transportation Systems

K-S: Kolmogorov-Smirnov

LS: Load Spectra

LTPP: Long Term Performance Project

LEF: Load Equivalency Factors

MAPE: Mean Absolute Percent Errors

MDF: Monthly Distribution Factor

MDOT: Michigan Department of Transportation

## Abbreviations (cont'd):

M-E: Mechanistic-Empirical

M-E PDG: Mechanistic-Empirical Pavement Design Guide

NCHRP: National Cooperative

OWPM: One Week Per Month

PCC: Portland Cement Concrete

QC: Quality Control

SS: Sum of Squares

TMG: Traffic Monitoring Guide

TTC: Truck Traffic Classification

TWRG: Truck Weight Road Group

U.P.: Upper Peninsula

VC: Vehicle Class

WIM: Weigh-in-Motion

## **CHAPTER 1 - INTRODUCTION**

The current AASHTO 1993 pavement design utilizes 18-kip Equivalent Single Axle Loads (ESALS) for determining pavement thicknesses. However, the development of the Mechanistic Empirical Pavement Design Guide (M-E PDG) under NCHRP Project 1-37 A does not use ESALs but instead requires the characterization of truck traffic directly. The principle goal of this research was to characterize the truck traffic found in the state of Michigan to develop the traffic-related M-E PDG inputs at various input levels for use in the ME-PDG software. These design input levels have been separated into three distinct groups based on the amount of knowledge the design engineer has about the particular traffic characteristic. The three levels are outlined in the M-E PDG Design Guide and are as follows (1):

- Level I (Site Specific) There is a very good knowledge of past and future traffic characteristics. At this level, it is assumed that the past traffic volume and weight data have been collected along or near the roadway segment to be designed. Level I is considered the most accurate because it uses the actual axle weights and truck traffic volume distributions measured over or near the project site.
- Level II (Region Specific) There is a *modest* knowledge of past and future traffic characteristics. At this level, only regional or statewide truck volume and weight data may be available for the roadway in question. Level II requests that the designer collects a sufficient amount of truck information in order to establish base loading and traffic patterns with reasonable certainty.

Level III – (Default) There is a *poor* knowledge of past and future traffic characteristics. At this level, little truck volume information such as Average Annual Daily Traffic (AADT) and a truck percentage exists. In this case, regional, statewide or default M-E PDG traffic inputs must be utilized.

Upon commencement of this study, the Michigan Department of Transportation (MDOT) maintained 44 weigh-in-motion (WIM) and seven classification only sites within the state of Michigan. With over 9,716 miles of state-trunkline, the ability to obtain Level I inputs where the monitoring device is placed near the design site is quite rare. Enhancing the ability to do so by adding additional monitoring locations becomes financially infeasible and impractical. Consequently, there is a need to establish Level II and Level III inputs, in which the engineer can reasonably estimate the traffic characteristics with an acceptable level of accuracy. This research satisfies this objective in the following steps:

- 1. Ascertain the traffic characteristics at the existing WIM and classification sites
- 2. Group sites with similar traffic characteristics together
- 3. Develop Level II inputs from group averages and Level III inputs from averages of all stations
- 4. Compare performance life differences between Level I and Level II/Level III to assess the impact on pavement longevity when using less than site-specific data.
- 5. Determine sites which will need, at a minimum, Level II data.
- 6. Develop an algorithm (discriminant analysis) for selecting the appropriate Level

  II traffic data for a given future design site.

While there are 13 traffic related inputs provided in the M-E PDG, emphasis was placed on the following five traffic characteristics for establishing hierarchical traffic inputs:

- Axle Groups per Vehicle (AGPV)
  - o Single, Tandem Tridem, Quad
- Monthly Distribution Factor (MDF)
  - o Set of 12 factors, one for each month
- Hourly Distribution Factor (HDF)
  - o Set of 24 factors, one for each hour
- Truck Traffic Classification (TTC)
  - o Percentage of truck traffic for each FHWA vehicle class 4-13, ten total
- Axle load dist/spectra
- Raw traffic data collected by the 51 WIM and classification stations managed by the MDOT were obtained and analyzed to establish the Level I (site-specific) traffic patterns at the existing WIM and classification stations. The program TrafLoad, developed under NCHRP Project 1-39 for the purpose of creating traffic input values for the M-E PDG, facilitated the conversion of the raw traffic data into the aforementioned traffic characteristics needed in the M-E PDG. Among the 51 candidate sites, only those sites in which at least 24 months of data, from November 2005-October 2007, were selected for analysis. Original criteria for the data extraction called for only one week of data per

month as required for TrafLoad Level I (site-specific) input. This was expanded to

utilizing all data within a month as it was functionally possible for the MDOT to extract and process this data within a reasonable amount of time. As a result, implications of utilizing one week per month of data versus continuous data were explored from a traffic input and a pavement performance standpoint.

Upon the data conversion, the sites with similar traffic patterns were grouped together based on a hierarchical cluster analysis using a mathematical distance algorithm.

Development of these clusters lead to the establishment of Level II traffic patterns that were created by averaging the particular traffic characteristic for all sites within the group. The developed traffic characteristics from all sites were also averaged to establish the Level III statewide averages.

It was also desirable to evaluate the effect that these hierarchical traffic characteristics have on pavement distress outputs in the M-E PDG. This information is needed to determine the overall reliability of the performance life that can be expected when less site specific data is used. To determine this impact, rigid and flexible pavement designs were developed in the M-E PDG. The various hierarchical traffic inputs were then placed into the designs and the resulting performance lives based on pavement distresses such as IRI, cracking and rutting were compared.

As stated previously, site specific traffic data needed for the M-E PDG is often unavailable prior to design. Consequently a selection process for the appropriate hierarchical traffic characteristic needs to be created. This was done by first determining which traffic characterizations required, at a minimum, Level II (more accurate) data based on the M-E PDG analysis. Subsequently, an algorithm, discriminant analysis, was conducted to develop a procedure for selecting the appropriate Level II data needed for

design. To satisfy this objective, similarities in physical properties as well as truck characteristics external to the specific traffic pattern were evaluated for the Level II traffic groupings. Such properties and characteristics were the following:

- Vehicle freight commodity
- Urban/Rural setting
- Long Haul or Local trips
- Geographic location

The result of this analysis has led to the creation of a discriminant analysis algorithm in which the physical properties of the site are inputted into an algorithm to select appropriate Level II traffic characteristics for design in the M-E PDG.

This thesis is organized into the following chapters:

- 1. Introduction
- 2. Literature Review
- 3. Methodology
- 4. Data Analyses and Results
- 5. Conclusion and Recommendations

Chapter 1 summarizes the methodology behind this research. It contains the basis for the research as well as an explanation of the general procedures undertaken in this project.

Chapter 2 presents past research related to (i) traffic characterization in the M-E PDG (ii) the effect of data coverage on the development of traffic characteristics (iii) the required equipment used in Michigan for collecting traffic data (iv) previous traffic

characterization studies, including clustering techniques and effects of traffic-related inputs on predicted pavement performance.

Chapter 3 reviews the methodologies applied for execution of this project. This chapter addresses the procedures used for collecting and extracting "raw" traffic data as well as the hierarchical data development. In addition, this chapter examines the effect of data coverage i.e., comparison between one week per month and continuous traffic data. The M-E PDG procedure for examining the effect each hierarchical traffic input has on predicted performance life is also addressed. Finally, the discriminant algorithm procedure for selecting Level II design inputs is reviewed.

Chapter 4 addresses the results obtained from the research. First, the effect of data coverage is evaluated followed by the developed traffic characteristics based on the "raw" traffic data. The sensitivity of these traffic characteristics in design is then assessed, which leads to the selection of final Level II and Level III traffic characterizations in the state of Michigan. Finally, the developed algorithms for determining the appropriate Level II input is presented..

Chapter 5 summarizes the conclusions reached that satisfy the project objectives.

Recommendations for the implementation and further development of traffic characterization in the M-E PDG for the state of Michigan and future research are also provided.

## **CHAPTER 2 - LITERATURE REVIEW**

The information presented in this chapter was obtained from (i) published journal articles such as Journal of the Transportation Research Record, the Journal of Transportation Engineering, etc., (ii) proceedings of various domestic and international conferences, and (iii) published research reports.

The literature review summarized in this chapter focuses on the following areas:

- Traffic characterization in the M-E PDG
- Effect of data coverage on the development of traffic characteristics
- Required equipment used in Michigan for collecting traffic data
- Previous traffic characterization studies

Traffic characterization is reviewed in order to identify the available traffic-related inputs in the M-E PDG. The effect of data coverage on the development of traffic characteristics was explored to gain particular understanding into the differences in developed traffic characteristics between using one week per month data and continuous data. A review of the required equipment used in Michigan allows for understanding of the sensors used to collect traffic data, the identification of error sources and the methods to identify those errors. Previous traffic characterization studies were explored to develop insight into the observed traffic characteristics in other states as well as the methods that led to their development.

#### 2.1 TRAFFIC CHARACTERIZATION IN THE M-E PDG

The M-E PDG accepts an array of traffic inputs for use in design. Table 2-1 summarizes each of these traffic inputs with respect to the available hierarchical levels in the M-E PDG (1).

Table 2-1. Traffic data required for the three M-E PDG input levels.

Data Elements/Variables		Input Level			
		I	II	III	
Truck Traffic & Tire Factors	Directional distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Truck lane distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Axle/truck class	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Axle and tire spacing	Hierarchical levels not applicable for these inputs			
	Tire pressure				
	Traffic growth				
	Vehicle operational speed	these inputs			
	Lateral distribution factor				
	Monthly distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Hourly distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	AADT or AADTT for base year	Hierarchical levels not applicable for these inputs			
Truck Traffic Distribution and Volume	Truck dist/spectra by truck class	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Axle load dist/spectra by truck class and axle type	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Truck traffic classification group for design	Hierarchical levels not applicable for these inputs			
	% of trucks				

As shown in Table 2-1, most of the data elements can be captured by hierarchical input data in the M-E PDG. Level I data are captured by site-specific WIM and classification sites. This data type has been provided by the MDOT. Where site-specific

information is unavailable for design purposes, the site-specific traffic characteristics will be grouped to form regional and statewide average values for the formation of Level II and Level III inputs.

## 2.2 EFFECT OF DATA COVERAGE ON DEVELOPMENT OF TRAFFIC CHARACTERISTICS

A study with the objective of characterizing truck traffic in California concluded in a preliminary analysis that WIM stations showed little differences between weeks in the same month. (2) The TrafLoad program manual states that the program accepts as a minimum one week per month of data for all 12 months in order for a site to be Level 1A site specific. (3) Studies performed by Cambridge Systematics reviewed in the TrafLoad manual, NCHRP Report 538, revealed that utilizing continuous 7-day data produced mean absolute percent errors of 10.1% and 9.9% for factored and un-factored ESAL counts respectively, when compared to "annual" (8 months of continuous data) estimates. (3)

Chapter 4 of the M-E PDG manual specifies confidence intervals and associated error in prediction of axle load distribution, truck traffic distribution and AADTT for a given amount of traffic collection days based on LTPP data. Utilizing 12 weeks at 7 days per week yields a total of 84 collection days for a given year. The manual states that at a 95% confidence level, 84 days of collection will produce a 1-2% error in axle load distribution, 2-5% error in truck traffic distribution, and a 5-10% error in AADTT. (1)

Additionally, another independent FHWA study assessed the actual variability in pavement life prediction. The study involved analyzing WIM stations, automatic vehicle classification (AVC) and automatic traffic recorder (ATR). The results most similar to the one week per month over 12 months WIM station collection scheme was regional

data from AVCs consisting of 1 month of data for each of the 4 seasons and 1 week of data for each of the 4 seasons. For the given pavements utilized, at a 95% confidence level, the overall range in error from variation in traffic data prediction and difference in performance prediction from continuous data is approximately 38% and 50% respectively. It should be noted that continuous site specific WIM data was regarded as the "true" measure of truck traffic and performance prediction (4).

The Traffic Monitoring Guide (TMG) recommends that for any truck weight road group (TWRG) formed, at least one continuous WIM station should be incorporated to provide the most accurate truck traffic factors (5). Most encountered analyses on the subject of evaluating the effect of traffic sampling recognizes continuous site specific WIM data as the actual truck traffic pattern of the site.

#### 2.3 WIM AND CLASSIFICATION SENSOR OVERVIEW

A review of the recommended data collection efforts was performed in order to make recommendations as to changes needed in the MDOT infrastructure or administration to accurately capture the traffic characterizations found in the state of Michigan. The data collection efforts consisted of:

- The WIM and classification equipment used in the state of Michigan
- Methodologies for quality control to ensure data accuracy.
- The count programs needed to establish volume, vehicle classification and axle loading

## 2.3.1 WIM and Classification Equipment Used in the State of Michigan

At the commencement of this project, the MDOT maintained several types of permanent WIM and classification sensor equipment for acquiring the Level I data

provided for this research. The type of permanent sensors used along with a general operational description is outlined below:

- Bending plate
- Piezoceramic cables
- Piezopolymer cables (BL sensors)
- Piezoquartz sensors

Bending Plates: Bending plates have dimensions of roughly 6' long by 2' wide in which one plate is installed in each wheel path, either aligned in parallel or staggered fashion, flush with the pavement. The bending plate is placed in its own steel frame and is not as impacted by performance of the surrounding pavement. This ensures more accurate data. Two inductance loops usually accompany the bending plate to differentiate between vehicles and measure speed. Strain gauges are mounted to the underside of each plate. When a vehicle passes over the plate the strain measured by the sensor is converted to the amount of loading needed to produce that strain (6).

Piezo Cables: All piezo cables operate in a similar manner. A narrow cut, roughly 2" wide, is placed in the pavement and the piezo cable is placed so that the top of the sensor is flush with the pavement. When a truck passes over the sensor, a voltage is created which is converted into a load that would be required to produce the measured voltage. Typical piezo sites can consist of two piezo sensors, two piezo sensors and an inductance loop, or one piezo and two inductance loops. These configurations allow for the measurement of vehicle speed and axle spacing. The latter is necessary for vehicle classification as piezos are axle based classifiers based on the standard FHWA 13 vehicle classes, which the MDOT utilizes. Besides enhanced accuracy, piezoquartz sensors have

an advantage over the other piezo sensors in that it is insensitive to temperature, a significant factor in a continental climate such as Michigan (6).

A limited review of the strengths and drawbacks of using the aforementioned sensors as suggested by Hallenbeck and Weinblatt is contained in Table 2-2 (6). A more extensive review of each of the equipment summarized in Table 2-2 as well as other sensors available for permanent continuous data collection can be found in Chapter 2 and Chapter 3 of Hallenbeck and Weinblatt.

While not reviewed in this project, it is recommended, as will be described in subsequent sections, that short-duration data collection be performed in addition to continuous collection. The following equipment is typically used for short-duration portable WIM and classification data using the FHWA 13-category system (6):

- Road tubes (Classification only)
- Piezoelectric sensors
- Capacitance mats (WIM)

Road tubes: Road tubes are the most frequently used short-duration classification sensor. Road tubes are pressure sensitive sensors, meaning that when a vehicle passes over the sensor, the air burst delivered inside the tube is converted to an electronic signal which marks the passing of a vehicle. The typical configuration is two road tubes placed parallel to one another on the road surface and perpendicular to traffic flow at a known distance apart. The distance setting allows for the calculation of vehicle speed and distance between axles (6).

Table 2-2. Strengths and Drawbacks of Perm. WIM and Classification Sensors in MI

Type of Sensor	Strengths	Drawbacks				
Classification						
Piezo Cable (ceramic, polymer[film], quartz)	Widely used and supported Best practices information available Ease of deployment Can work well in areas of high volume, if stable speed	Requires regular maintenance Difficult to maintain in areas of high traffic volume				
	WIM	T				
Piezo Cable (ceramic, polymer)	Easier, faster installation than most other WIM systems Generally lower cost than most other WIM systems Well supported by the industry	Sensitive to temperature changes Accuracy affected by structural response of the roadway Less accurate than piezoquartz Susceptible to lightning Meticulous installation required				
Piezoquartz	Easier, faster installation than most other WIM systems May be more cost-effective (long term) if sensors are long-lasting Very accurate sensor Sensor is not temperature sensitive Growing support by industry	More expensive than other piezo technologies Requires multiple sensors per lane Above average maintenance requirement Sensor longevity data not available Accuracy affected by structural response of roadway				
Bending Plate	Frame separates sensor from pavement structure Entire tire fits onto sensor Moderate sensor cost Sensor is not temperature sensitive More accurate than piezo cables Extensive industry experience with technology	Longer installation time required than piezo technologies Variability in sensor life				

**Piezoelectric sensors:** The piezoelectric sensors operate in the same manner as those reviewed for continuous data collection. The significant difference is that the portable

short-duration sensor is mounted on top of the pavement surface rather than within the pavement surface. This causes additional dynamic forces which leads to the improper calculation of vehicle weight. Additionally, the dynamic impact could allow the sensor to inadvertently detect the presence of two axles instead of one, creating errors in vehicle classification as well. The need for significant calibration and accommodation for the inaccuracies of recorded weights can make DOTs decide against the use of portable WIM. Instead, placing more continuous, permanent WIM stations, flush with the pavement, is favored to collect additional weight and classification data using this sensor (6).

Capacitance mats: Capacitance mats, like piezoelectric sensors and road tubes are placed on the surface of the roadway. They consist of two metal plates with a dielectric material in between. They are placed in only one wheel path of the lane. When a vehicle passes over the mat, the plates are pushed closer together, increasing their capacitance. This capacitance increase is converted to the weight required to induce the capacitance. Since the mat is placed above the roadway, additional dynamic forces are created by the "bump" which, similar to piezoelectric sensors, causes inaccuracies in calculated vehicle axle weights (6).

Table 2-3 provides a limited review of the strengths and weaknesses of using the available portable sensor technology to collect short-duration WIM and Classification data. A more extensive review of each of the equipment summarized in Table 2-3 as well as other sensors available for permanent continuous data collection can be found in Chapter 2 and Chapter 3 of Hallenbeck and Weinblatt (6).

Table 2-3. Strengths and Drawbacks of Portable Classification and WIM Technology

Type of Sensor	Strengths	Drawbacks					
Classification/WIM							
Road Tubes	Inexpensive	Inaccurate under high					
	Very common	volumes					
	Easy to use	Difficult to install on					
		multiple lanes					
Piezo Cable (ceramic,	Ease of development	<u>-</u>					
polymer[film])	Inexpensive sensor cost						
	Classification data is	conditions					
	considered reliable	Sensitive to variations in					
		temperature					
		More accurate if used as a					
		permanent installation					
		Susceptible to lightning					
WIM							
Capacitance Mats	Ease of deployment	Only measures one wheel					
	Modest sensor cost	path					
		Creates the largest "bump"					
		of the portable technologies					

It is at the discretion of a DOT to select the proper equipment for its data collection efforts. When selecting the appropriate equipment for use Hallenbeck and Weinblatt suggest reviewing the following (6):

- Data collection needs of the users
- Data handling requirements and capabilities of the highway agency
- Characteristics of available makes or models of equipment

In addition to these considerations the actual physical characteristics of the site must be considered. For most equipment the site must meet the following criteria (6):

- Flat pavement (No horizontal or vertical curves)
- Smooth pavement(No bumps)
- Strong pavement
- Vehicles maintain a constant speed, usually above 10 mph

- Vehicles do not follow close to one another (as in urban areas)
- Vehicles maintain lanes

If the aforementioned properties are not met, weight and classification have the potential to be highly erroneous despite the best of calibration efforts. Poor pavement conditions will result in improper weight data while sporadic vehicle behavior will result in classification inaccuracies.

A more extensive list of questions that each agency should address for these issues can be found in Chapter 4 of Hallenbeck and Weinblatt (6). A sample selection sheet is also provided for use in choosing the proper equipment needed for the data collection effort.

## 2.3.2 Error Sources

Attention must be given to the potential errors that can be encountered when recording traffic data at WIM and classification stations as well as methodologies to detect those errors. The following summarizes the literature found on this subject.

The TrafLoad manual specifies eight sources of error associated with the collection of traffic loadings (3):

- The calibration of the data-collection equipment
- Differences in axle-weight distributions among different VCs
- Differences in vehicle loading rates between one road and another
- Differences in vehicle load by direction
- Variation in axle weights caused by changes in loading conditions by time of day
- Variation in axle weights caused by changes in loading conditions by day of the week

- Variation in axle weights caused by changes in loading conditions by time of year
- Future changes in loading conditions

WIM equipment is especially sensitive to calibration error, which is in turn affected by sensor installation, sensor condition, pavement roughness, environmental conditions and roadway geometrics (3). A study by Prozzi and Hong found that a 1% under calibration can cause a 3% overestimation of pavement life in flexible pavement design in the M-E PDG. The authors also found that a 1% over calibration lead to approximately 2% underestimation of pavement life (7). To reduce sensor error from environmental conditions, it is suggested that sensors be placed in a smooth, flat structurally sound pavement in good condition to ensure sensor accuracy. Producing 300' concrete sections could provide a more structurally and long lasting base for sensor placement. Sensors also must be placed away from areas in which trucks will be either accelerating or decelerating and will maintain their lane when passing over the sensor (6). Calibration must be conducted periodically to ensure accurate weights are being taken.

The differences in axle load spectra amongst the different VCs are accommodated by the separation of each axle load spectra for each VC in the M-E PDG. The TrafLoad software is capable of generating axle load spectra for each VC and each axle configuration.

Differences in loading rates across various road types and between directions are due to differences in commodities carried and amount of loaded trucks (3). Variation by day, week or month is also heavily dependent on commodity and economic activity in the area. These economic activities must be tracked to ensure proper loadings are taken.

Seasonal changes are captured by creating axle load spectra for each month. The M-E PDG program assumes that loading rates do not change over the course of the design life. Research has supported that axle loadings do not vary from year to year (2). However, it is still possible that load distributions can change over time and could be a function of the following (3):

- Truck size and weight laws
- The commodity characteristics of specific routes
- The fraction of loaded and unloaded trucks on the roadway (trucking efficiency)

To accommodate for such changes, traffic loadings on roadways must be periodically checked to ensure temporal variation has not occurred.

The TMG provides the following sources of error for the collection of truck classification data from axle-based sensors (5):

- Inaccuracies in the distance measurement between the two axle sensors
- Inaccuracies of axle sensors
- Improper development of sensor classification algorithm (lack of calibration)
- Presence of more than one vehicle class with similar axle spacing
- Variable speed of vehicles as they pass over the sensor
- Lack of lane discipline when passing over the sensors
- Change in classification distribution and volume counts over time

The first four errors mentioned are controlled through the proper selection, installation and calibration of the classification sensor equipment. As with WIM sensors, classification sensors need to be put in structurally sound pavement that is free of bumps which may interfere with the determination if a truck axle has passed. Properly

configuring the sensor and developing a robust algorithm for the conversion of axle spacing to vehicle classification will limit the number of erroneously classified vehicles.

The next two errors pertaining to vehicle movement over the sensor can be controlled through the proper selection of the site. Placement on a straight, limited access stretch of roadway with no stop-and-go traffic will allow trucks to pass over the sensor as designed. This will allow the sensor to perform as desired. However, even with these steps, the sensor should provide a log of the amount of unclassified or improperly classified vehicles so that the agency can determine if the site is working properly.

The final error pertains to the temporal variations of truck traffic distribution and volume over time. The M-E PDG assumes that vehicle classification does not change over the design life. Traffic volumes are accounted for by applying a growth factor algorithm within the program.

# 2.3.3 Quality Control

Since WIM and classification sensors have the potential to yield inaccurate traffic data, it is necessary to perform quality assurance checks to determine if the acquired data is erroneous. The general methodology for the quality control check is to review the data and flag any traffic patterns that are indicative of deviations from known trends.

Particular emphasis is placed on analyzing VC 9 traffic (standard 5- axle tractor semitrailer), which is well documented due to its prevalence in the traffic stream. The TMG recommended reviewing some of the following anomalies in VC 9 gross vehicle weight (GVW) that suggest possible site or calibration failure (5):

- A shift in peak loading value (calibration drift)
- High percentage of vehicles heavier than 80 kips

• A flat weight distribution (scale failure)

The TMG states that unloaded VC 9 trucks should have a GVW between 28 and 36 kip while loaded trucks should be between 72 and 80 kips. Simultaneous shifts from both of these peaks to either lower or higher weight value suggest that the WIM site has fallen out of calibration. A shift in only one peak can also be an indication of scale failure (5).

The maximum allowed GVW for VC 9 trucks is approximately 80 kips. If it is found that a large number of trucks are over this limit, the sensor should be checked for possible errors, unless this type of overloading is common (5). In Michigan, the maximum allowable load for VC 9 trucks is approximately 83 kips, as given in Table 3-5 of this report. As such, a large frequency of trucks exceeding this limit should not be expected. The TMG also states that when a WIM sensor fails, particularly a piezo-electric, an almost flat GVW distribution is produced.

It is also suggested that the recorded axle spacing of the tractor tandem axle on VC 9 trucks be checked as it is a fairly consistent parameter across the truck fleet. If this value is incorrect, it is possible that weights measurement and classification could be invalid.

In addition to reviewing weight data, Hallenbeck and Weinblatt (6) note other checks that can be administered to collected traffic data to verify if the sensor may be failing:

- AADTT counts significantly off from previous records
- A change in VC 9 percentage trucks from previous data collection
- Unusual HDF patterns
- Hours missing from the dataset
- Scale's diagnostics reporting problems

Similar to VC 9 axle loading data checks, the majority of these suggestions involve comparing collected data with previously known trends of the site. Monitoring truck volumes and percentages for unexpected increases in volume as well as shifts in vehicle class distribution provide an indication of sensor failure.

LTPP also had a range of suggested data checks. While most checks echoed those already mentioned, there were a few reviewed that especially pertained to classification data. Table 2-4 reveals these LTPP checks along with the causes of error (8).

**Table 2-4. Potential Classification Error Checks and Sources** 

Classification Data				
Check	Error			
Abnormally large presence of motorcycles	Time-out or vehicle thresholds are too low			
Large number of VC 8 vehicles	Closely following pairs of cars are recorded as trucks Passenger vehicles pulling trailers are being classified as tractors pulling trailers Axle sensors are routinely missing one of the tandem axles on conventional 5-axle tractor semi-trailer trucks.			
Unusually large numbers of other VCs	Algorithm not properly configured to describe state's vehicle fleet.			

It should be noted that this is only a limited review of quality control checks that can be implemented. It is at the discretion of the DOT how to apply appropriate data control processes needed to verify the quality of collected traffic data. A more comprehensive review of data quality control checks can be found in the literature (3, 5, 6, 8)

## 2.3.4 Count Programs

A state highway program needs to collect the following truck data at a minimum (3, 5):

- Short-duration volume counts
- Continuous volume counts
- Short-duration classification counts
- Continuous classification counts
- WIM measurements

To facilitate this collection effort a modest number of continuously operating sites will be needed with a substantial amount of short-duration counts. The large amount of short-duration allows for the expansion of coverage within the state, while the continuous counts are performed for the creation of adjustment factors, such as time-of-day, day-of-week and seasonal adjustments (MDFs) for the short-duration counts (3, 5). Wherever possible, TMG recommends the collaboration of data collection efforts between states and within states. Counts and weight measurements taken by neighboring states along with county and city operations such as intelligent transportation systems (ITS), long term pavement performance monitoring, weight enforcement and toll facilities can enhance the state's collection program (5). Such enhancements are better distribution of resources, more effective quality control, and reduction of wasted duplicative effort. The following highlights the data collection efforts needed to produce the aforementioned counts.

## 2.3.4.a Uses and Output of Count Programs

The primary goal of volume counts is the collection of AADTT for the site. Volume counts are necessary for (5):

- Safety analyses endeavors
- Vehicle loading applications
- Vehicle use as part of revenue forecasts
- Statistics used by private sector for placement of business and services

Traffic classification is needed to determine the volume of each vehicle class present on the roadway. This data has implications on the following (5):

- Pavement design
- Pavement management
- Prediction and planning for commodity flows and freight movements
- Development of weight enforcement strategies
- Vehicle crash record analysis
- Environmental impact analysis
- Analysis of alternative highway regulatory and investment policies

Loading data from WIM stations collect axle load spectra by vehicle class and axle type. They are needed for but not limited to the following:

- Pavement design
- Pavement maintenance
- Bridge design
- Pavement and bridge loading restrictions
- Determination of need and success of weight law enforcement actions

- Determination of the need for geometric improvements
- Determination of need of safety improvements

As stated previously, in order to meet the needs of state agencies and others the volume count program should consists of the following:

- Short-duration volume counts
- Continuous volume counts

The following sections outline the goals and reasoning behind each type of count, along with the recommended duration and location of the counts.

### 2.3.4.b Short-Duration Count Program

A short-duration count program consists of coverage counts, which allow for the expansion of data coverage within the state and "special needs" counts, which are used for individual purposes such as project design or traffic study counts (5). The TMG recommends that the short duration volume coverage count program should provide comprehensive coverage across the roadway infrastructure on a cycle of 6 years. Short duration classification counts should account for at least 25-30% of all volume counts being conducted wherever possible. Additionally, at least one vehicle classification count should be made on each route annually (5). Taking counts over a cycle period ensures that at least some data is recorded for a particular roadway segment. However the state agency might need to collect more frequently than this based on available funding, the use of the data and the level of accuracy required. Particular areas where this would be needed are high-growth urban or recreational settings in which traffic can be highly variable (5). A roadway segment is typically considered to be in rural roads areas a 10-mile stretch of road with limited access and on interstates where individual

traffic counts are within 10% that do not encompass interchanges. When performing short-duration coverage volume counts, a minimum of 48-hrs should be collected (5). When performing classification counts, hourly volumes should be taken, for all lanes and all directions. For discontinuous WIM sites, the TMG recommends that one-week's worth of data should be recorded to account for day-of-week differences (5). Permanently mounted sensors should be used to collect discontinuous data as significant accuracy issues are associated with portable sensors. It is recommended that the count program should collect hourly volumes by direction and lane. This aids in signal timing, air quality analysis, noise analysis, planning studies and planning and timing of maintenance activities (5).

In addition to coverage counts, "special needs" counts are used for creating statistical samples for developing system wide summary measures and for the creation of point-specific estimates intended to meet project requirement and other studies. Statistical samples are created through random sampling of the roadway infrastructure to calculate unbiased estimate of traffic population means and totals. This however, can be an inefficient way of gaining understanding of a state's traffic data. Conversely, point-specific estimates gain site-specific knowledge of the traffic volumes that the roadway will experience and are implemented directly in design (5).

The coordination of effort between the collection of coverage counts and "special needs" counts allows for efficient use of agency resources. Ideally, the state agency should have an understanding of all counts that need to be performed, and determine if certain counts can be made for more than one purpose. This "list" should then be checked against known permanent counters to eliminate duplicative short-duration

counting efforts. Additionally, the data collection needs of these locations should also be examined. For example, if more than a volume count is needed, a classification or WIM sensor that collects volume count data would be more appropriate resource then a counter. Again, it is necessary to convert these counts into unbiased estimates through adjustment factors. Guidance on factoring can be found in Chapter 3 of Section 3 and Chapter 4 of Section 2 in the TMG (5).

Short duration counts need to be designed so as to cover the state geographically as much as possible. The intent is to capture all traffic patterns that are found within the state. These travel patterns can be different due to physical attributes of the roadway and nature of trucking movements. Truck traffic in urban areas can exhibit different loadings than those in rural areas. Roads that serve agricultural sources can have different loadings and classification distributions than those for industry (5). Truck volumes can be dependent on functional class. Different geographical regions can also produce varying volume patterns, classification distribution and loading values due to freighting movements, and the nature of the road (through trucks vs. local). The coverage program needs to identify each of these elements and discern predictable traffic patterns from them. Commercial vehicle volume, classification and tonnage maps can be particularly useful in selecting homogeneous groups for each type of traffic characteristic (5).

## 2.3.4.c Continuous Count Program

Vehicle classification, vehicle volumes, and axle loadings could vary by (5):

- Time of day
- Day of week
- Time of year

- Direction
- Geography

In addition to collecting accurate truck traffic data, continuous counts should be performed for the creation of adjustment factors to account for such variation, especially for the short-duration counts (3, 5). These counts are also usually established to observe unusual trends in traffic movement, confirm previous counts from historical data or to expand data coverage in areas which little information about traffic volume is known.

The TMG recommends the following guide for selecting continuous count locations (5):

- Determine "statewide" objectives for the continuous count program. Establish the number and distribution of count locations to develop adjustment factors.
- Determine what continuous data collection is needed for specific projects and what continuous data collection exists or is planned for operational purposes such as traffic management or weight enforcement
- Determine available funding
- Prioritize the "specific" project locations
- Place counters and WIM devices at the "specific" project locations for which funding exists
- Determine how the project data collection efforts help "statewide" needs such as factor group creation.
- Determine the number of additional continuous count and WIM locations to meet statewide needs
- Prioritize the remaining "statewide needs" locations

- Allocate counters and WIM devices to these "statewide needs" locations based on priority and available funding
- If funding remains after statewide needs are met, place additional continuous counters at the "specific" project sites for which counters are not currently allocated.

The number of continuous counters should be established in such a way that the diversity in traffic pattern can be represented while staying within budget and resource limitations.

An inventory of the current continuous volume recorders should be conducted, followed by a review of how the data are being used, who is using it, and future uses of the data if new procedures were implemented. Quality control should be addressed and put into place to ensure the data is representative of actual traffic. Systematic procedures need to be implemented in order to objectively identify invalid data, and control how the invalidated data is handled. This procedure also identifies if collected data is not being used correctly and leads to the determination of locations in need of data collection effort (5).

#### 2.3.4.d Continuous Volume Count Program

Determination of the vehicle volume patterns that need to be monitored has a direct impact on the number and placement of continuous volume counters. The identification of traffic patterns can be done through the use of cluster analysis as previously described. Factors such as MDFs from individual sites can be created and accordingly clustered to discover seasonal patterns in traffic volumes. These patterns can be compared against previous factor groups or patterns to determine if sites are being

grouped together appropriately. This can also expose special cases in which the observed variation needs to be examined more closely, causing a need for additional continuous recording devices. In the case where cluster analysis does not compare to previously formed groups, reformation of the existing groups to form homogeneous factors is necessary. In such cases, geographical differences could separate the formed groups, or rural vs. urban designation. This more subjective approach can be beneficial when there is significant professional knowledge about the location's travel tendencies. The TMG recommends that 3-6 volume seasonal groups be formed. Additional information on the formation of seasonal groups will be examined in subsequent sections.

The TMG recommends that for 95% confidence and 10% error in the precision of the traffic factors formed within a seasonal group, five to eight continuous counters should be established per group. Once the factor groups are formed, the locations of the continuous ATRs should be compared against the groupings. If less than five continuous ATRs exist for a group, then more will need to be added. If more than eight exist for a group, reduction or relocation of the continuous volume count sensor can be warranted (5).

#### 2.3.4.e Continuous Classification Count Program

Continuous counters should be placed to measure traffic volumes and distributions on different functional classes and geographic locations. They are utilized to create time-of-day, day-of week and MDFs and also assist in the application of axle correction factors to volume counts. These factors are separate than those created for volume counts as volume count adjustments do not accurately depict classification patterns (5).

Roadways with primarily local traffic and primarily through traffic should be especially

monitored. Highways should monitor all heavy truck movements over a variety of different roads consisting of interstate highways, major arterials and routes with primarily intrastate freight movements (3). When forming factor groups, it is recommended that the following vehicle classes be combined to reduce computational efforts and eliminate the variability in factors from low volume classes (5):

- Single-unit trucks
- Single unit combination trucks (tractor-trailers)
- Multi-trailer combination trucks

The development of factors can be performed by having a continuous classification recorder on each roadway and have short-duration counts be adjusted based on the nearest continuous classification counter. Guidelines for adjusting short-duration classification counts can be found in Chapter 4 of Section 4 in the TMG (5). As with volume counts, vehicle class can be grouped by clustering analysis to identify traffic pattern trends in the data. The formation of truck groups are largely dictated by the amount of through trucks and the presence of agricultural or economic activity.

Functional class is only applicable if it readily helps distinguish through truck movements versus local movements where interstates and principal arterials are known to have larger through movements. Areas with local truck traffic can have truck generation that is highly seasonal, such as agricultural harvesting. Thus truck commodity maps could indicate routes with similar trucking movements (5).

The TMG recommends that at least six continuous vehicle classification counters be established for each factor group. Continuous counts should be placed on different functional classes and different geographic regions within the state (5). Emphasis should

be placed on roads that are primarily local or long hauls. When new sites are added, the data should be compared and placed into the appropriate existing factor groups.

## 2.3.4.f Continuous Weight Count Program

Truck Weight Road Groups (TWRGs) are groups of roads formed by state agencies that have similar axle loading characteristics. The formation of such groups allows for the creation of axle load spectra tables which are needed when site specific load data is unavailable. There are a number of characteristics that can be used to define these groups, which include, but are not limited to (3, 5):

- Region of the state
- Areas of particular economic activity (agricultural vs. industrial)
- Nature of commodities carried
- Gross Vehicle Weight (GVW) per vehicle
- Principle trucking route (local or long-haul)
- Functional class (urban/rural)
- Percentage of empty, partial and full trucks
- Specialty cases (heavy truck patterns)

TWRGs should be established so that they can be easily applied by the state and provide a logical means to determine which roads are likely to have very high load factors and which have lower road load factors (5). Sites within a particular TWRG should have similar weight limitations, with consideration for frost restriction (3). A review of haul distances is important as combination trucks on long hauls are more likely to be fully loaded, whereas short hauls are more likely to be loaded one way and unloaded the other (3). Hence, urban areas and non-interstate rural routes are likely to

have lower axle load spectra than main interstate routes. It is also recommended that the TWRGs formed be similar to the classification groups formed wherever possible. However, forming homogeneous groups across various traffic characteristics may not be entirely possible. Sites with directional differences in axle load spectra should be assigned their own TWRG. Such differences could include gravel haulers taking gravel to the site in one direction and returning empty for another load in the other. The TrafLoad manual offers guidance on the categorizing of a site into a TWRG. The following highlights this guideline (3):

- 1. Group each roadway together which contain similar size and weight limitations
- 2. Assign each road within a certain weight limitation the following:
  - a. Functional Class/System (urban, rural, rural interstate, rural other)
  - b. Region
  - c. Direction
- Divide up the above TWRGs into further groups if density of commodity or axle load spectra by direction varies.

The TrafLoad manual suggests there should be between three and eight sites in a TWRG (3). The TMG recommends that for all sites within a TWRG, a minimum of six should be monitored, with at least one of the WIM sites operating continuously and recording two or more lanes of traffic (5). The amount of permanent WIM stations and discontinuous portable systems is a function of the number of TWRGs created, the accuracy at which the measured weights are taken, and the budget of the state agency (5). Any additional site added to the group should be established in such a way that accurate data can be taken from the site. For roadways with unknown axle loadings, accuracy of

the WIM data is paramount to physical placement of the site itself (6). More monitoring is implored but is at the discretion of the respective DOT based on manpower and budget limitations.

WIM collection sites should be distributed in such a way so as to measure truck patterns that differ by region or type of road. Each time a station is moved, the WIM site should be relocated to a location in which axle load spectra are unknown so that coverage of the state progressively increases. It is recommended, wherever feasible, that continuous permanent WIM stations be placed to accurately measure truck traffic data (3).

The selection of new WIM sites should be based on the following (5):

- The need to obtain more vehicle weight data on roads within a given truck weight group
- The need to collect data in geographic regions that are poorly represented in the existing WIM collection effort
- The need to collect data on specific facilities of high importance
- The need to collect data for specific research projects or other special needs of the state
- The need to collect weight information on specific commodity movements of importance to the state.

Caution should be given towards the placement of the WIM stations. WIM stations placed before load enforcement stations could produce biased results of the axle loadings. The TMG states that the number of WIM stations established within a state should fall

between 12 and 90, where more stations should be added if there is a need to understand traffic data for a certain area.

#### 2.3.4.g Administrative Efforts

In order for traffic count programs to be successful, administrative efforts will need to be applied to ensure data is being properly collected, summarized and used. To facilitate this, the TrafLoad manual recommends the following administrative tasks (3):

Training for pavement designers on

- What traffic data are needed
- Why the data is important
- What effect the data will have on pavement design
- Where to acquire the data that has been collected
- How to request more data when available data is insufficient
- How to review traffic estimates being provided

Training for data-collection and analysis staff on

- What data are important for pavement design and what produces the most significant effect
- How that collected data will be used in the design process
- What the flow of traffic load data is in the pavement design process

#### Increased communication that

- Allows data-collection staff to correctly anticipate and schedule the data needs of designers
- Ensures the data and summary statistics produced by the data-collection personnel
   meet the needs of the pavement designers

- Ensures that the data required are transmitted to the pavement design staff in a timely manner and in a format that can be easily loaded into the mechanistic design software.
- Involves both the pavement design and data collection staff in the review and refinement of the data-collection and summarization process used to feed the design process.

#### A review of the

- Resources spent collecting traffic data
- The relative value to the pavement design engineers of the various resources
- The potential value of additional data collection expenditures to the program

  Heavy emphasis is placed on the need for effective communication between data

  collection personnel and pavement design engineers. It is paramount that each side

  understands one another's needs. In addition to a collaborative effort, summary of the

  data is crucial for creating a potent data collection and pavement design system. Readily

  accessible and relatable summarized traffic information makes efficient use of data

  collection efforts. Wherever possible, the collected data should be placed in a computer
  based program, preferably with GIS linkage that allows for easily summarization and

## 2.4 OVERVIEW OF TRAFFIC CHARACTERIZATION PATTERNS

retrieval (5). Institutional changes must be made to ensure these guidelines are met.

An overview of observed traffic characterizations patterns in the literature prepared the staff with an idea of what could be expected from Michigan data. A review of the M-E PDG defaults was also performed for comparison. Emphasis was placed on the

following traffic characterizations as they are readily grouped and compared for similarities by many state agencies.

- Truck Traffic Classification (TTC)
  - o Percentage of truck traffic for each FHWA vehicle class 4-13, ten total
- Monthly Distribution Factor (MDF)
  - o Set of 12 factors, one for each month
- Hourly Distribution Factor (HDF)
  - o Set of 24 factors, one for each hour
- Axle load dist/spectra
  - Loading proportions for each vehicle class and each axle group, 40
     total

Each traffic element is further discussed into the following:

- Traffic characterization
- The effect each traffic characteristic has in the M-E PDG design

#### 2.4.1 Traffic Characterization

#### 2.4.1.a Truck Traffic Classification

The FHWA separates all traffic into 13 vehicle classes. The truck classes constitute Class 4-Class 13 as shown in Table 2-5. There are two distinguishing characteristics regarding the classification of any truck: number of axles and trailer type, whether it is single unit, single trailer or multi-trailer. This separation is necessary as the GVW as well as the trip type, long haul or local can be characterized by the particular truck type. The GVW of each class will be discussed further in the discussion of axle load spectra.

**Table 2-5. FHWA Vehicle Classes** 

FHWA Vehicle Class	Description	Example Vehicle Configuration
4	Two-Axle Buses	(C) (C) (C) (C)
5	Two-Axle, Six-Tire, Single-Unit Trucks	
6	Three-Axle Single- Unit Trucks	
7	Four or More Axle Single-Unit Trucks	5
8	Four or Fewer Axle Single-Trailer Trucks	
9	Five-Axle Single- Trailer Trucks	5 00 00 5 00
10	Six or More Axle Single-Trailer Trucks	5 50 000
11	Five or fewer Axle Multi-Trailer Trucks	
12	Six-Axle Multi-Trailer Trucks	<u>ੀ</u> ਹੈ ਹੈ ਬਦਰ ਦ
13	Seven or More Axle Multi-Trailer Trucks	5 00 000 0 00 00 00 00 00 00 00 00 00 00

NOTE: In reporting information on trucks the following criteria should be used:

- Truck tractor units traveling without a trailer will be considered single-unit trucks.
- A truck tractor unit pulling other such units in a "saddle mount" configuration will be considered one single-unit truck and will be defined only by the axles on the pulling unit.
- Vehicles are defined by the number of axles in contact with the road. Therefore, "floating" axles are counted only when in the down position.
- The term "trailer" includes both semi- and full trailers.

The M-E PDG manual (1) reveals that VC 5 and VC 9 vehicles dominate the truck traffic distribution, with varying percentages of other truck classes. In research with national LTPP data related to the development of the M-E PDG program, it was found that three discernible patterns emerged:

• Equal frequencies of VC 5 and VC 9 trucks

- Higher frequency of VC 5 compared to VC 9
- Higher frequency of VC 9 compared to VC 5

Similar research (2, 9, 10, 11, 12) in Washington, Arkansas and California along with other national LTPP data, supported the same findings. When trying to form sites with similar TTC, it was found that functional class or highway designations were not homogeneous within the TTC groups formed (2, 9, 11). Additionally, in the California study, number of lanes, direction, truck volume and percentage did not have any dominating patterns within the TTC groups. Instead it was found that geographical location and trucking route behavior, such as local or long hauls were more of a determining factor (2). TrafLoad states that single unit trucks, Classes 4-7 are typical of more local trips whereas single and multi-trailers have more long-haul behavior (3). The M-E PDG offers 17 varying TTCs default values for use in design and are shown in Figure 2-1.

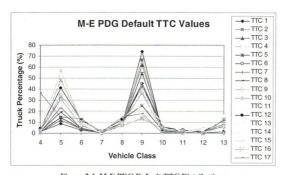


Figure 2-1. M-E PDG Default TTC Distributions

#### 2.4.1.b Monthly Distribution Factor

The MDFs convey the seasonal differences in AADTT by assigning a normalized weight factor to each month of the year. A seasonally independent value of 1 for each of the 12 MDFs in the M-E PDG is assumed as the default, Level III, data. Consequently, months with higher AADTT than others will receive a weight factor greater than 1 while months having lower AADTT will be assigned a weight factor less than 1. Other studies (1, 5, 9, 12), which evaluated MDFs, found varied distributions. Research presented in the Traffic Monitoring Guide TMG has suggested that two traffic patterns exist. consisting of a "flat urban" which is seasonally independent, and a "rural summer peak" in which the summer months experience higher AADTT than the winter (5). The TMG also states that most states track four or more seasonal patterns, based on a combination of functional class and geographic location. Additionally, MDFs can also be dependent on localized truck movements, particularly in agricultural areas (5). Subsequent analyses of MDFs in California found that most of the truck traffic exhibits a peak in summer months and a decline in the winter, with a peak value of 1.1 in the August and a low value of 0.9 in January (12). It was noted in this study that deviation from this base pattern could be attributed to local economic activity, such as logging or agricultural activities. Work by Tran and Hall showed that most of the sites in Arkansas showed peaks prior to the summer months and Christmas (9). Tam and Quintus, however, could not find a definitive monthly volume change within the traffic stream and recommended the default value be used unless a visible or known pattern can be determined (11). The M-E PDG Design Guide states that pavements may be sensitive to MDFs and are influenced by factors such as adjacent land use, location of industries in the area, and

whether the site is rural or urban (1). The following can be stated in regards to seasonal factor groups from the TrafLoad manual (3):

- Seasonal variation is less in urban areas than rural
- The highest volumes are seen May-October, with the lowest being in January
- Local influences such as agricultural harvesting or mining can create significant seasonal variation on rural and non-interstate roadways
- Roads with more diverse truck classes limits the effect of local effects on seasonal patterns

## 2.4.1.c Hourly Distribution Factor

HDFs establish the percentage AADTT that travel on the roadway for each of the 24 hours within a day. As most can relate to the increase of cars on the roadway during rush hour, or peak hour, time frames, trucks also exhibit time dependent behavior. The review of the literature found that most HDFs exhibited a trend of having a peak period between the hours of 10:00 am and 5:00 pm (2, 11). The TMG cites a 1997 FHWA study by Hallenbeck (5) in which trucking patterns were found to exhibit two types of patterns. The first one being an almost constant percentage of trucks each hour throughout the day and the other having a single humped peak, typically during the morning. The constant percentage trucks throughout the day signified a greater presence of long-haul through trucks whereas the peaked distribution was found to be consistent with local trucks (5). Grouping of HDFs by Lu and Harvey (2) revealed three patterns. The first pattern had the distinct peak between 10:00 am. and 5:00 pm., which was typical of most sites. These sites were found to be urban in nature and were characteristically short hauls. The second grouping was much flatter, having closer to an even distribution across all 24 hours of the

day. A check of these sites revealed they were more rural in nature and were on routes known for long hauls. The final grouping was a mixture of the first two, not as peaked as the first yet not as flat as the second. These sites were located in rural areas typical of having more medium distance hauls (2). In a study by Tam and Von Quintus that utilized national LTPP data found that most sites had similar peaked distribution between the hours of 10:00 am. and 5:00 pm and little difference between rural and urban sites (11).

The M-E PDG establishes a HDF based on 5 distinct time-frames in which the hourly truck percentages within the specified time frame are constant. These time frames are (a) midnight to 6:00 am (b) 6:00 am - 10:00 am. (c) 10:00 am - 4:00 pm (d) 4:00 pm. - 8:00 pm and (e) 8:00 pm - midnight (1). The default HDFs in the M-E PDG are shown in Figure 2-2 while the actual values and time frames are shown in Table 2-6.

Table 2-6. Actual HDF Default Values in the M-E PDG

Hour	HDF	Hour	HDF
0	2.3	12	5.9
1	2.3	13	5.9
2	2.3	14	5.9
3	2.3	15	5.9
4	2.3	16	4.6
5	2.3	17	4.6
6	2.3	18	4.6
7	5	19	4.6
8	5	20	3.1
9	5	21	3.1
10	5	22	3.1
11	5.9	23	3.1

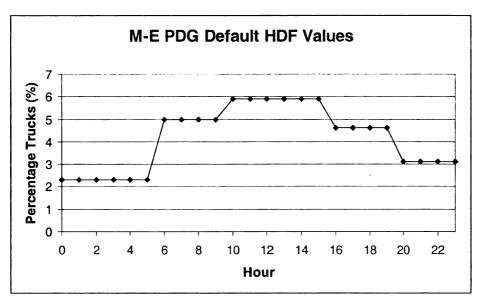


Figure 2-2. Default HDFs in the M-E PDG

## 2.4.1.d Axle Load Spectra

The M-E PDG establishes an axle load spectra for each axle configuration within each vehicle class. The percentage of axles is distributed into the following load bins for each axle configuration and vehicle class:

- Single: 3000-41000, in 1000 lb increments (39 bins)
- Tandem: 6000-82000 in 2000 lb increments (39 bins)
- Tridem: 12000-102000 in 3000 lb increments (31 bins)
- Quad: 12000-102000 in 3000 lb increments (31 bins)

Research by Tran and Hall (13) found that the axle load spectra for the tandem axles could be divided into three distinct loading patterns based on cluster analysis:

- Equal proportion of loaded and unloaded trucks (light and heavy tandem axles)
- Higher proportion of unloaded trucks than loaded
- Higher proportion of loaded trucks compared to unloaded

Research by others show similar results (2, 10, 12). It was also concluded that the site specific single axle load spectra for all vehicle classes exhibited similar peaks and distribution within their respective vehicle class. As such, the researchers found it reasonable to create one set of single axle load spectra for each vehicle class to establish the statewide values (13). Working with WIM sites in California, Lu and Harvey made the following observations

- Of all steering axles in the traffic stream, most are from VC 5 and VC 9 vehicles
- Most single axles come from VC 5, VC 8 and VC 11 trucks
- Most tandem axles consist of VC 9 trucks
- Most tridem axles come from VC 10 and VC 13 trucks

The study also revealed that axle loads were similar amongst region and travel corridors within the state (2).

Timm et al. cited a study performed in Texas, in which it was concluded that site specific load spectra are required for high volume design whereas lower volume sites required regional-specific data (9). The TrafLoad manual cited a California study by Cambridge Systematics in which the effect of using regional and 48 hour axle load spectra data over site specific data was studied. The research found that the regional data produced Mean Absolute Percentage Errors (MAPE) of 17-20%, while 48 hour axle load data had only 7% MAPE vs. site specific data (14).

The statistical significance of temporal and spatial differences in axle load distributions was explored by Turochy et. al. at 13 WIM stations in Alabama (15). The study found statistically significant differences in axle load spectra between each day of the week and the statewide average, between each direction and the site average, as well

as each of the site distributions and the statewide average. However, the authors note that the significance criterion for the test is heavily dependent on the number of sample observations, and as the number increases, small differences in axle load distribution become statistically significant.

Research by Wang et. al found that, when forming VC 9 single axle load distribution clusters from a set of 507 Midwest and southern LTPP WIM sites, the largest 10 groupings contained 80.5% of all sites. For VC tandem axles, the largest 10 and largest 20 contained nearly 55.8% and 73.5% of all sites. The findings suggested most axle load distributions could be deduced to a select few spectra. The same study also revealed that the axle load spectra exhibited significant spatial variation (16). Cluster memberships were observed to vary across and within states. Certain clusters could be seen in multiple states while others existed within one specific geographical area. Temporal variation was also noted. The same research performed cluster analysis of the axle load spectra for one month in 1998 and then ran a parallel cluster analysis for the axle load spectra in the same month five years prior in 1993. The results showed that the majority of sites switched cluster memberships after 5 years, revealing that axle load spectra could vary year to year (16). However, monthly variation within a current year, analyzed in other research, was found not to vary significantly. (2, 10, 11, 17)

Analysis conducted on WIM stations in the LTPP North Central Region found that the differences in the axle load distributions for all analyzed WIM stations were found to be statistically different. However, reduction of the sites into three regions established axle load distributions that were not different statistically. The findings again support the reduction of axle load spectra into a select few distributions. The study also revealed the

typical single and tandem axle load patterns of the regions. For single axles, the following was noted: (17)

- The maximum load observed is roughly 34 kips.
- The distribution had two distinct peaks at approximately 3.5 kips and 11 kips.
   The two peaks were representative of unloaded and loaded vehicles with tandem axles.
- For more than 95% of the sites, the proportion of the first peak was lower than that of the second.

For tandem axles the study noted the following (17):

- The maximum load observed was near 61 kips.
- Similar to single axles the tandem axle plots had two distinct peaks at 11 kips and 30 kips, which corresponded to mean axle loads of unloaded and loaded vehicles respectively.
- For more than 70% of the sites, the first peak contained a lower frequency than that of the second.

The research also found that 50% of all axles were single, 49% of all axles were tandem, while only 1% were tridem. In terms of ESALs, single, tandem, and tridem axles made up19%, 80% and 1% of all ESALs respectively (17). The findings suggest focusing the investigation on single and tandem axle load distributions, with particular emphasis on tandem axles.

## 2.5 EFFECT OF TRAFFIC CHARACTERISTICS IN DESIGN

Timm, Bower and Turochy (14) cited a study performed in Texas, in which it was concluded that site specific load spectra are required for high volume design whereas

lower volume sites required regional-specific data. The authors also performed their own study in Alabama on the effect of flexible pavement design thickness when utilizing statewide load spectra compared to site specific load spectra. The research facilitated the averaging of single and tandem axle load spectra exclusively for obtaining statewide values and utilized an M-E design program called PerRoad to establish the design pavement thickness. The findings concluded that out of the 12 WIM stations involved, and 36 flexible designs utilized, 31 designs using the site specific axle load spectra within 0.5 in of the designs which utilized the statewide average axle load spectra. However, the researchers noted that sites with particularly heavy axle loads warranted more site specific axle load spectra as the disparity in pavement thickness for such sites exceeded 2 in for certain design scenarios (14). The research also concluded that increasing soil stiffness reduced the difference in pavement design thickness between site specific and statewide axle load spectra.

Turochy et. al (17) assessed the practical significance of directional differences in axle distribution as well as differences between site-specific and statewide average load distribution. This was established by creating flexible and rigid designs altering only the respective axle load distribution. As access to the M-E PDG software was unavailable at the time of the study, the researchers utilized the 1993 AASHTO Design Guide to establish pavement thickness designs. The study found that directional axle load distribution was insignificant when compared to the overall site axle load spectra average, with differences in pavement thickness of 0.5 in and 0.3 in for flexible and rigid pavement respectively. Comparison of sites to the statewide average yielded rigid and

flexible design of less than 0.7 in for 12 out of the 13 sites, which was considered negligible.

Tran and Hall performed an analysis of the effect of various traffic characterization inputs on flexible pavement design in the M-E PDG. Based on performance life due to rutting and fatigue cracking failure the following conclusions were reached (13):

- Statewide averages for M-E PDG TTC groups produced significantly different pavement performance lives (up to 20% difference) than those produced in by using the comparable M-E PDG defaults
- Statewide MDFs produced similar performance results as those generated from the M-E PDG default values.
- Statewide HDF values did not create significantly different performance life than those created by the M-E PDG default values

## **CHAPTER 3 - METHODOLOGY**

A review of all procedures used to facilitate the objective of characterizing traffic data for the state of Michigan is presented in this chapter. In particular, the methodologies applied for the following elements are discussed:

- Data collection and processing
- Identification of traffic inputs in need of characterization
- Methodology used for comparing effect of data coverage
- Methodology used for hierarchical traffic characterization
- Methodology for selection of appropriate traffic characterization for design

#### 3.1 DATA COLLECTION AND PROCESSING

The data collection and processing element reviews the existing data collection sites that the MDOT currently maintains in which traffic data can be extracted. Attention is also given to the procedures for the conversion of the collected traffic data into traffic inputs using the software TrafLoad. Finally, a quality control review of the data is presented which leads to the final selection of sites to be used in the analyses.

## **3.1.1 Review of Existing Data Collection Sites**

Continuous MDOT maintained WIM and classification sites were utilized to acquire

Level I traffic data throughout the state of Michigan. A complete list of the MDOT

permanent classification and WIM sites can be found in Table A1 and A2 in Appendix A

of this report. Upon the commencement of the study, a review of the MDOT

infrastructure identified the following:

• Forty-four WIM stations

 Fifty-one classification stations including the 44 WIM stations and seven classification-only sites.

The available data at these sites were first evaluated to determine if usable traffic characteristics could be extracted. As stated previously, the program, TrafLoad (3), selected for developing the traffic characteristics requires that for Level I data, a minimum of one week per month for all twelve months of the year be available. The MDOT was requested to extract two-years worth of data, from November 2005-October 2007 from every site where applicable in an attempt to ensure that at least one-week's worth of data was available for every month of the year. Initially, the first week's data of each month was extracted over the selected time period to provide Level I inputs.

Subsequent discussions with the MDOT lead to a satellite analysis in which the effect of data coverage between one week per month (OWPM) and continuous time frames was assessed. To facilitate the continuous time frame, all available data over the same time period was also extracted.

The extent of the available weight data, the "W records" or "7 cards" is displayed in Table 3-1. At the time data extraction was performed, site 7179 was relocated and its data was no longer available. Out of the remaining 43 sites available, only 38 had data coverage longer than the required year. These sites were selected for further processing in TrafLoad and are shown uncrossed in Table A-1. Sites 6349 and 8249 were also processed, but were later removed by a QC process to be described subsequently.

Table 3-1. Summary of WIM Data Extent

Number of Sites (44)	Timeframe of Data	Number of Months Covered
35	November 2005 – October 2007	24
1	November 2005 – March 2007	17
2	October 2006 – October 2007	13
1	November 2005 – September 2006	11
1	November 2005 – April 2006	6
1	July 2007 – October 2007	2
2	October 2007	1
1	None	0

The extent of the available classification data, the "C records" or "4 cards", is shown in Table 3-2.

Table 3-2. Summary of Classification Data Extent for TrafLoad-Validated Sites

Number of Sites (51)	Timeframe of Data	Number of Months Covered
37	November 2005–October 2007	24
1	November 2005–October 2007 Missing June 2006–September 2006	20
1	May 2006-October 2007	18
1	November 2005–March 2007	17
1	June 2006–October 2007	17
1	July 2006–October 2007	16
2	October 2006–October 2007	13
1	November 2005–September 2006	11
1	November 2005-April 2006	6
1	June 2007–October 2007	5
1	July 2007–October 2007	4
2	October 2007	1
1	None	0

From Table 3-2, a total of 44 sites have at least one year's worth of classification data. This includes the 38 WIM stations from Table 8 and an additional six classification sites. The additional classification sites selected for further processing are shown without an asterisk in Table A-1 and A-2 of Appendix A. Sites 6349, 8249 and 7289 were also initially processed but removed by a QC algorithm to be described in Section 3.1.4.

## 3.1.2 Processing of Raw Data in TrafLoad

The mathematical algorithms present in TrafLoad that lead to the development of the traffic characterizations are too intensive to present within this report. A full discussion of the processes undertaken to develop the traffic characterization from the raw WIM and classification data can be found in Appendix A of this thesis.

## 3.1.3 Conversion of Sites Into Traffic Characterizations

The conversion of continuous traffic data to the M-E PDG format for the 38 WIM stations and six classification sites was performed using TrafLoad according to the algorithms presented in Appendix A. Utilizing the continuous data, all sites were successfully processed excluding site 6349. TrafLoad did not process the north direction for weight despite doing so for classification data. The nature of the problem was unknown. Table 3-3 contains the quantity of successfully processed weight and classification files.

Table 3-3. Quantity of Processed Continuous Weight and Classification Data

Type of Data	WIM	Classification	Totals
Weight and Classification	37	N/A	37
Weight Only	0	N/A	0
Classification Only	1	6	7
Total	38	6	44

The processed sites will be used to characterize traffic into the hierarchical levels to input into the M-E PDG.

For the same 44 candidate sites, TrafLoad was also used to produce traffic inputs for OWPM data. There was an error in the classification files that stated the program failed to process the classification data due to a lack of 24 hours of data for some months, days of week, direction, lane and or vehicle class, for sites 6469, 8249, 7289, 2029, 7069, and

7329. Similarly, the weight data for site 6019 had missing weight information for certain classes within a given month for OWPM data. It was assumed that the WIM or classification equipment for these sites could have been offline or failed during some days or hours of the weeks selected for analyses. Consequently, these sites were excluded for the comparative analysis between OWPM and continuous data. Table 3-4 shows the number of sites that successfully OWPM processed weight and/or classification data.

Table 3-4. Quantity of Processed OWPM Weight and Classification Data

Type of Data	WIM	Classification	Total
Weight and Classification	35	N/A	35
Weight Only	2	N/A	2
Classification Only	1	2	3
Total	38	2	40

## 3.1.4 Data Quality Control Review

While it is assumed that proper calibration procedures were conducted by the MDOT to ensure accurate sensor readings, equipment can fail or fall out of calibration between scheduled maintenance. As such, implementation of quality control techniques such as those outlined in the literature review is crucial in highlighting potential erroneous data. The quality control utilized in this research consisted of a proper formatting check in TrafLoad followed by a subsequent review of the processed data.

TrafLoad has a built-in formatting validation algorithm that can be applied when uploading raw weight and classification files into a database. The validation process checks each line of traffic data within a file to determine if it is in proper card-4 or card-7 format as outlined by the TMG. If TrafLoad is unable to read the file, an error message will be created indicating the problem. However, data that is properly formatted and

proven to be so through the validation process in TrafLoad does not necessarily indicate that the data contained within these sites is reliable or accurate. The true quality of the data could only be verified when all sites have been processed and results such as axle load spectra, TTC and AADTT have been evaluated for anomalies.

The quality checks performed directly on the processed traffic inputs were similar to those observed in the literature review. Since this was the first extensive traffic characterization effort performed in the state of Michigan, there was little axle loading information to compare the accuracy of the developed traffic data in this analysis. To overcome this, the general guidelines outlined in the TMG for detecting sensor failure utilizing GVW were applied and are repeated below (5):

- A shift in peak loading value (calibration drift)
- High percentage of vehicles heavier than 80 kips
- A flat weight distribution (scale failure)

Since TrafLoad produces axle load spectra and not GVW, a review of individual axle load spectra was performed, in particular those for VC9. The Michigan Truck Guide (18) designates the axle load limits for trucks on Michigan roadways as shown in Table 3-5. In reviewing axle load spectra, significantly large overloads were deemed to be an indication of possible sensor failure. From Table 3-5, it can be determined that the maximum axle load limits are as follows:

- Single 18 kips
- Tandem 32 kips
- Tridem 39 kips
- Quad 52 kips

Table 3-5. Typical Axle Load Limit and Gross Vehicle Weight Limit

	Max	Max	Max	Max	Gross	Gross
37-1-1-1-	Single	Tandem	Tridem	Quad	Normal	Frost
Vehicle Class	Axle	Axle	Axle	Axle	Axle	Axle
Class	Weight	Weight	Weight	Weight	Weight	Weight
	(kips)	(kips)	(kips)	(kips)	(kips)	(kips)
VC5	18		-	-	33.4	21.7
VC6	15.4	32			47.4	30.8
VC7-1	15.4	-	39	•	54.4	35.4
VC7-2	15.4	-	-	52	67.4	43.8
VC8-1	18	-	-		51.4	33.4
VC8-2	18	32	-	-	65.4	42.5
VC9-1	18	32	-	_	82	N/A
VC9-2	18	32	-	•	83.4	54.2
VC10-1	18	32	N/A	N/A	101.4	65.9
VC10-2	18	32	N/A	N/A	91.4	59.4
VC10-3	18	32	N/A	N/A	119.4	77.6
VC11	-	-	-	-	87.4	56.8
VC12	N/A	N/A	N/A	N/A	N/A	N/A
VC13-1	18	32	-	-	117.4	76.3
VC13-2	15.4	32	39	-	151.4	98.4
VC13-3	18	32	-	52	161.4	104.9
VC13-4	18	32	52	-	117.4	76.3
VC13-5	15.4	32	52	-	125.4	81.5
VC13-6	15.4	26	39	52	132.4	86.1
VC13-7	15.4	32	39	-	143.4	93.2
VC13-8	15.4	32	39	52	138.4	90
VC13-9	15.4	32	-	52	151.4	98.4

\*Note: "-" indicates axle type not in configuration. N/A means data was not given for the vehicle class.

As previously stated in the literature review, it was found that truck traffic in the LTPP North Central Region, which Michigan is part of, had several characteristics for single and tandem axles. For single axles, the following was noted: (17)

- The maximum load observed is roughly 34 kips.
- The distribution had two distinct peaks at approximately 3.5 kips and 11 kips.

  The two peaks represented unloaded and loaded vehicles with single axles.

- For more than 95% of the sites, the first peak was lower than that of the second. For tandem axles the study noted the following: (17)
  - The maximum load observed was near 61 kips.
  - Similar to single axles the tandem axle plots had two distinct peaks at 11 kips and 30 kips, which corresponded to mean axle loads of unloaded and loaded vehicles respectively.
  - For more than 70% of the sites, the first peak contained a lower frequency than that of the second.

Based on the TMG guidelines, axle load limits in Michigan and a review of the LTPP traffic data within the region, the following criteria was established for distinguishing potentially erroneous sites from axle load spectra:

- Single axle loads beyond 34 kips
- Single axle loads that had significant deviations of peak loadings from 3.5 kips or
   11 kips
- Tandem axle loads beyond 61 kips
- Tandem axle loads that had significant deviations of peak loadings from 11 kips and 30 kips
- Flat axle load spectra

In addition to a review of axle load spectra, the vehicle classification for each site was also evaluated for abnormally high percentages (greater than 25%) in vehicle classes other than VC5 or VC9. This can be an indication that the sensor is misclassifying the trucks per LTPP stipulations. The results of the QC review as well as the selection of the final sites for analyses is contained in Section 4.1

Prior to clustering of the data to develop Level II inputs, the review of axle load spectra and TTC for potential errors also produced valuable observations with regard to the nature and behavior of the distributions. A review of the observations made is warranted as it will have an impact on the selection and creation of traffic inputs:

- There is very little seasonal (month to month) variation in axle load spectra for most vehicle classes. The exceptions to this are the vehicle classes that constitute a very low percentage of the traffic volume and are on low AADTT roads. These susceptible VCs: VC 4, VC 7, VC 8, VC 11, and VC 12 can produce highly variable load spectra due to low sample size.
- There is little directional difference in axle load spectra for most vehicle classes. Only VC 10 and VC 13 exhibited directional difference. This most likely is due to these truck types being local in nature, perhaps traveling to and from a logging site or gravel pit. It was anticipated that VC 10 and VC 13 would contain only a small percentage of the traffic stream. Consequently, there was only a need to analyze a single direction as was done in this analysis.
- The single axle loads within a given vehicle class for nearly all sites are similar. This can make it possible to obtain average values for the single axle load distribution for each vehicle class with seemingly minimal error.
- The single axle load distribution seems to depend on the quantity of VC 5
  and VC 9 vehicles. Higher proportions of VC 5 yield a single axle load spectra
  (all vehicle classes) that is dominant around 3-6 kips while higher VC 9
  proportions lead to distributions that have high frequencies that range from 11-13
  kips.

- The tandem axle load distributions greatly depend on the axle load spectra of VC 9. Distributions using all axle load spectra from each vehicle class compared to that of VC 9 were very similar. This suggests VC 9 controls tandem axle loading.
- The tridem and quad axle load spectra are almost entirely composed of VC 10 and VC 13 data. This is due to the fact that other than VC 7, which makes up very little of the traffic stream, VC 10 and VC 13 are the only axles which have tridem and quad. Focus on these two vehicle classes for the state are all that is needed to capture these axle configurations.

# 3.2 IDENTIFICATION OF NECESSARY ELEMENTS FOR TRAFFIC CHARACTERIZATION

The traffic elements in the M-E PDG were identified in the literature review and are again stated in Table 3-6.

Table 3-6. Traffic Data Required for the Three M-E PDG Input Levels

Date	a Elements/Variables		Input Level		
Date	Data Diements/ Variables		II	III	
Truck Traffic & Tire Factors	Directional distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Truck lane distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC	
	Axle/truck class	WIM or WIM or		National WIM or AVC	
	Axle and tire spacing				
	Tire pressure	Hierarchical levels not applicable for			
	Traffic growth	Hierarchic	at levels not app these inputs	ilcable for	
	Vehicle operational speed		mpato		
	Lateral distribution factor	-			

Table 3-6. (cont'd)

	Monthly distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC
	Hourly distribution factor	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC
	AADT or AADTT for base year	Hierarchical levels not applicable for these inputs		
Truck Traffic	Truck dist/spectra by truck class	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC
Distribution and Volume	Axle load dist/spectra by truck class and axle type	Site specific WIM or AVC	Regional WIM or AVC	National WIM or AVC
	Truck traffic classification group for design % of trucks	Hierarchical levels not applicable for these inputs		licable for

Traffic elements containing hierarchical levels were the focus of this research. A more detailed explanation of the specific elements assessed is contained in Section 4.2 of this paper.

#### 3.3 ONE WEEK PER MONTH VS CONTINUOUS DATA

An investigation was initiated to establish if using OWPM data coverage is reliable enough for use in the ME-PDG as compared to using continuous data for the entire year. The six traffic characteristics included in the investigation are: average annual daily truck traffic, (AADTT), axle groups per vehicle (AGPV), monthly distribution factors, (MDFs), hourly distribution factors (HDFs), truck traffic classification (TTC), and axle load spectra (ALS).

The differences between OWPM and continuous data coverage were assessed in two ways; (a) first, the comparison was made between the numerical differences in the traffic input values yielded by OWPM and continuous data, (b) second, the differences

between one-week and continuous data inputs was assessed through an evaluation of predicted performance life of rigid pavements in the M-E PDG (1). There were several traffic characteristics that yielded a distribution of values rather than a single variable— ALS, MDFs and HDFs. It was desirable to ascertain a single value that would capture the difference in the distributions and provide a practical and relatable quantity to draw conclusions. This method was preferred over performing statistical analysis for comparing different distributions through tests like the Kolmogorov-Smirnov (K-S). The use of a single value allows for easy application of statistics on the difference between OWPM and continuous data. For the latter case, a rigid and flexible base designs wer used with thicknesses determined through AASHTO design methods and ESAL calculations. The M-E PDG runs were executed for continuous and OWPM data from each site. The predicted performance life based on the limiting distress, percent slabs cracked, was recorded for both OWPM and continuous data. It should be noted that all other inputs (e.g., layer thicknesses, materials, and environmental variables) were held constant so as to attribute any difference in performance life solely to the differences in inputted traffic parameters based on the data coverage.

The following sections expands on the procedures for assessing the difference between OWPM and continuous data from both a traffic characterization and pavement performance standpoint.

# 3.3.1 Manipulation of Traffic Characterization Data for Comparison

As previously mentioned, it was highly desirable to create a single value which captured the difference between the two data sets (OWPM vs. continuous) for statistical analyses of the data. Due to the nature of the traffic characterizations varying from a

single unit value (AADTT) to a full distribution such as axle load spectra, the creation of a single unit value(s) was different for each traffic characterization. As a result, it is necessary to review the process for creation of a single value for each traffic characteristic.

### 3.3.1.a Average Annual Daily Truck Traffic

As AADTT is a single variable itself, the difference in AADTT was measured as the difference between continuous AADTT and OWPM AADTT. It should be noted that these AADTT values are for a SINGLE design lane direction and not two-way totals. For statistical purposes, it is necessary to normalize these "raw" AADTT value differences into percentages as the physical magnitude of the difference for a given site would misconstrue the data. Equation 3.1 shows the relative difference in AADTT:

$$AADTT\%_d = \frac{AADTT_c - AADTT_w}{AADTT_c} * 100$$
 (3.1)

#### 3.3.1.b Truck Traffic Classification

In preliminary analyses of the data, it was found that the traffic stream was largely dominated by Vehicle Class (VC) 5 and VC9 and, to a lesser extent by VC13 trucks. Rather than comparing all 10 vehicle classes, it was decided to compare the distribution between single unit trailers (VC 4-7), tractor trailer combinations (VC8-10) and multi trailer combinations (VC11-13). Grouping in this way allowed more dominant truck classes to be separated, and minimized the differences that would be seen in VC that are rarely present in the traffic stream as suggested by research (5). The creation of the single value for TTC for each grouping was done by summing the vehicle class percentages from each category and subtracting one week from continuous values as

shown in Equation 3.2. Unlike AADTT, it was not necessary to calculate a relative percentage difference, as TTC percentages were already normalized values.

$$TTC_{di} = \sum TTC_{ci} - \sum TTC_{wi} \tag{3.2}$$

## 3.3.1.c Monthly Distribution Factor

The default MDFs created by TrafLoad were separated into the same groupings as mentioned in the case of TTC. For each truck grouping of single unit trailers (VC4-7), tractor trailer combinations (VC8-10) and multi trailer combinations (VC11-13), there were 12 factors corresponding to each month of the year. As an alternative, rather than having 36 values for each site, an average difference in MDFs between one week and continuous data across the 12 months was taken for each truck grouping as demonstrated by Equation 3.3. It is important to note that the absolute value of the difference had to be taken since the MDFs must always sum to 12, and thus it follows that the average difference (or sum of differences) will always be zero. The result of this computation yields a single average positive difference for each truck grouping. Since MDFs are normalized values, there was again no need to establish a percentage difference.

$$\frac{\sum_{i=1}^{12} |MDF_{cim} - MDF_{wim}|}{MDF_{di}} = \frac{m=1}{12}$$
 (3.3)

### 3.3.1.d Hourly Distribution Factor

The difference in HDF values was assessed in a similar manner to that of MDFs. Since the HDF must add to 100%, differences found between OWPM and continuous data for each hour of the day would sum to zero. As such, the absolute value of the difference was taken for each hour and averaged to create a single positive value for each site. The calculation can be seen in Equation 3.4

$$\frac{\sum_{k=0}^{23} |HDF_{ch} - HDF_{wh}|}{HDF_d = \frac{h=0}{24}}$$
(3.4)

## 3.3.1.e Axle Groups Per Vehicle

The single value for AGPVs was created through a straight difference between continuous and OWPM data for each axle type and vehicle class. The calculation is shown in Equation 3.5. For tridem, and quad AGPV, only data from VC 7, VC 10, and VC 13 were used as they are the only VCs that have these axle configurations.

$$AGPV_{dij} = AGPV_{cij} - AGPV_{wij}$$
(3.5)

#### 3.3.1.f Axle Load Distributions

Single and tandem axles were chosen to be compared as they are the most prevalent axle types in all vehicle classes (2, 19). The VC5, VC9 and VC13 were analyzed only as they were shown to be the most prevalent in the traffic stream in Michigan. To determine the variation in axle load spectra, a single average axle load value for OWPM and continuous data was created by multiplying the proportion in each axle load category for a given axle type and vehicle class,  $ALS_{lij}$ , by the loading value of that category,  $ALV_{li}$ , as shown in Equation 3.6. Since TrafLoad produces monthly axle load spectra for each axle, a total of 24 values were available for comparison for each VC. As it has been stated in the literature (19), little month to month variation exists in axle load spectra, annual axle load spectra values were utilized by averaging monthly spectra. The numerical difference between OWPM and continuous data was calculated by subtracting the OWPM average axle load value from the continuous average axle load value for each site, as shown in Equation 3.7. These values were then normalized by calculating percentage difference for the same reasoning as AADTT.

$$AL_{ij} = \sum_{k=1}^{39} ALV_l * ALS_{lij}$$
 (3.6)

$$AL\%_{dij} = \frac{AL_{ijc} - AL_{ijw}}{AL_{ijc}} *100$$
(3.7)

# 3.3.2 Traffic Input and M-E PDG Performance Comparison

## 3.3.2.a Traffic Input Comparison

One sample *t*-test and paired *t*-tests for the differences between continuous and OWPM data were performed to determine if the difference was significantly different than zero (*p*-value less than 0.05 for 95% two-tailed test). The *t*-test could not be performed for the MDF and HDF values as the differences were all positive values. Additionally, summary statistics such as mean, standard deviation, standard error and a 95% confidence interval were prepared to assess the data. The result of these analyses is reviewed in Chapter 4.3.1 of this paper.

#### 3.3.2.b M-E PDG Performance Comparison

In order to establish the practical significance of the difference between OWPM and continuous data, rigid and flexible pavement designs were developed in the M-E PDG, The base rigid design used for this analysis is contained in Table 3-7. This design was assumed to be representative of conditions at a potential site within the state of Michigan based on a previous M-E PDG sensitivity study in Michigan (20). All other parameters not specified in Table 3-7 were given default values in the M-E PDG.

Table 3-7. Rigid Base Design for M-E PDG Analyses

Layer/Detail	Elastic Modulus (psi)	Thickness (in)	
JPCP	550 (MOR) 4.2M (EM)	Variable	
Crushed Gravel	25000	6	
Sand Subbase-A3	15000	13	
Clay Roadbed-A6	10000	Semi-Infinite	
Joint Spacing	15 ft		
Dowel Bar Diameter	1.25 in (<10in) 1.5in (=>10in)		
Climate	Lansing, MI		

ESALs and AASHTO Design through the DNPS86 software. The pavement design life was assumed for 20 years handling traffic at a 2% growth rate. The ESALs were calculated through the site base year axle repetitions previously calculated for each loading criteria and each axle type. The base year axle repetitions were established by running the M-E PDG with the data from the site and extracting the base year axle repetitions for all axle configurations from the output. The LEFs were based on a 10" pavement. This resulted in thickness designs for the 34 stations utilized in this study having both OWPM and continuous weight and classification data. These are shown in Table A3 of Appendix A.

The M-E PDG program calculates international roughness index (IRI), percent slabs cracked and faulting as part of its rigid analysis. FHWA specifies maximum design thresholds for the rigid performance predictors for various design lives. In a preliminary analysis, 20 year performance predictors proved to be too stringent using 95% confidence in the M-E PDG; Failure was occurring in half the design life. As a result a combination of M-E PDG default and FHWA 30 year thresholds were used as failure criteria. The thresholds were mandated as follows:

• IRI-172 in/mi (M-E PDG default)

- Faulting- 0.236 in (FHWA 30 years)
- Percent Slabs Cracked- 15% (FHWA 30 years, M-E PDG default)

It was determined that the limiting distress was percent slabs cracked in the M-E PDG. The program was first run using AASHTO pavement design thicknesses established from the ESALs generated by the continuous data set. The design life at which the percent slabs cracked reached 15% was then recorded. The pavement thicknesses were then adjusted in the M-E PDG so as to ensure the percent slabs cracked threshold was as close as possible to 20 years as shown in Table A3 of Appendix A. The program was then rerun using OWPM data. Pavement life performance was recorded and compared to that of continuous data.

The flexible base design used in the analysis is contained in Table 3-8. This was also assumed to be representative of a potential site within the state of Michigan based on the same M-E PDG sensitivity study (20).

Table 3-8. Flexible Base Design for M-E PDG Analyses

Layer/Detail	Elastic Modulus (psi)	Thickness (in)	
Asphalt	Conventional Pen. Grade 60-70	Variable	
Crushed Gravel	30000	8	
Sand Subbase-A-1-b	26000	18	
Silt Roadbed-A4	15000	Semi-Infinite	
Climate	mate Lambertville, MI		

The climate selected was Lambertville, MI weather station. The elastic modulus was made higher for the asphalt case as it was necessary to combat the effects of rutting as the soil structure is designed to help support the traffic loadings. Similar to rigid pavement, the proper design thickness to be used in the M-E PDG was calculated by using ESALs and AASHTO Design through the DNPS86 software. The pavement design life was

again assumed for 20 years handling traffic at a 2% growth rate. The ESALs were calculated through the site base year axle repetitions previously calculated for each loading criteria and each axle type. This again resulted in thickness designs for the 34 WIM stations utilized in this study as shown in Table A4 of Appendix A.

The M-E PDG program calculates international roughness index (IRI), fatigue cracking and rutting as part of its flexible analysis. The program also calculates longitudinal cracking but this type of distress was not used for failure criteria in the literature review and as such will not be evaluated here. For a given design life, FHWA specifies maximum design thresholds for the flexible performance predictors. In a preliminary analysis, 20 year performance predictors, like the rigid analysis, proved to be too stringent using 95% confidence in the M-E PDG. As a result, a combination of M-E PDG default and FHWA 30 year thresholds were used as failure criteria. The thresholds were mandated as follows:

- IRI-172 in/mi (M-E PDG default)
- Fatigue cracking- 10% surface area (FHWA 20 years)
- Total rutting- 0.70 in (Adjusted M-E PDG default)

It was determined that the limiting distresses were fatigue cracking and total rutting in the M-E PDG. In similar fashion to the rigid design, the program was first run using AASHTO pavement design thicknesses established from the ESALs generated by the continuous data set. The design life at which fatigue cracking and total rutting reached 10% and 0.70 in, respectively, was recorded. It was noted that in some instances total rutting and fatigue cracking had inverse relationships. As such, the pavement thicknesses were then adjusted in the M-E PDG so as to ensure, where possible, that at least one

failure criteria provided performance lives approximately 10 years or greater to facilitate comparison. The program was then rerun using OWPM data. Pavement life performance was recorded and compared to that of continuous data.

### 3.4 FORMATION OF TRAFFIC CHARACTERIZATION CLUSTERS

## 3.4.1 Hierarchical Cluster Analysis Overview

A literature review was undertaken to determine how some of the previously mentioned studies attempted to group WIM or classification recording devices together according to similarities within the previously described traffic characteristics. A number of literature highlighted grouping by using statistical clustering techniques, particularly a hierarchical clustering algorithm, to group the respective sites by a particular traffic characterization element (2, 5, 10, 17).

In the hierarchical approach, specifically agglomerative clustering, the algorithm begins with all sites as individual clusters. A given distance measure is specified for distinguishing how far apart the two sites are as well as a methodology for grouping sites together based on the distances. The algorithm proceeds by grouping sites together based on the distance measure and methodology to form successive clusters until a final single cluster is formed. When a particular site is assigned to a cluster it remains in the cluster indefinitely. With this technique, the desired number of clusters does not need to be specified but rather can be selected after the analysis as the output produces clusters at each stage (21). This technique is suitable for smaller data sizes that are numerical in nature and contain multiple values for a given case, which is applicable to this research.

# 3.4.2 Hierarchical Cluster Analysis Procedure

The hierarchical algorithm requires two inputs in order to commence clustering:

- A distance measure to determine how similar each site (case) is
- A procedure for determining how clusters should be formed

The distance measured is the actual calculation of the difference, or how far apart two sites (cases) are from one another. The most popular distance measures used are (22):

• Euclidean distance: 
$$\sqrt{\sum_{z=1}^{n} (A_z - B_z)^2}$$
 (3.8)

• Squared Euclidean distance: 
$$\sum_{z=1}^{n} (A_z - B_z)^2$$
 (3.9)

• Manhattan distance: 
$$\sum_{z=1}^{n} |A_z - B_z|$$
 (3.10)

• Chebychev distance: 
$$\sum_{z=1}^{n} Max |A_z - B_z|$$
 (3.11)

In the above formulas, A and B are the given site names, and z is the zth variable in a set of n variables. For instance, for the TTC dataset, the total number of variables (n) would be 10 (10 vehicle classes) and the first variable, z=1 would be the TTC percentage for VC4.

The Euclidean distance is the most basic and widely used of the four distances.

Manhattan distance produces very similar results to that of Euclidean. The squared

Euclidean distance allows more sensitivity to outliers, which is more ideal for

distinguishing variables within a site that are distinctly separate from each other.

Chebychev difference only incorporates the highest difference between variables and will

ignore differences in other variables within a case (22).

Of the four stated distances, the squared Euclidean distance was selected as it is necessary to ensure that distinct contrasts between particular variables for a pair of sites be captured in order to prevent the sites from being clustered together. This distance measurement corresponds to that used in the cluster analysis performed in the TMG and those done by other researchers in their studies of forming traffic classification clusters (5, 10).

The hierarchical clustering method establishes the clustering distance in which to group sites together with. The following are some typical linkage techniques

- Single linkage
- Complete linkage
- Un-weighted pair group average
- Ward's method.

In single linkage, the clustering distance between two clusters is computed by finding the two sites in each cluster that have the lowest Euclidean distance between them. Single linkage works well for sites that are string-connected. In contrast, in complete linkage the given clustering distance measure between two clusters is defined by the two sites from each cluster that are the furthest apart in terms of their Euclidean distance. This method is efficient when the clusters form distinct blocks. In un-weighted pair group average, the clustering distance is defined as the two clusters which have lowest average Euclidean distance between all sites within the two clusters. This method works well with string and clumped sites. Finally, in Ward's method, an alternate approach is utilized in which the next cluster to be formed minimizes the sum of squares for all cases within the whole cluster (22). This method is regarded as the most efficient and was used by the TMG

cluster analysis as well as research in similar projects (5, 10, 22). As such, Ward's method was selected for use in this project.

## 3.4.3 Clustering Example with TTC

The clustering process using squared Euclidean distance with Ward's method is best explained through an example utilizing the TTC traffic characterization. The general approach is to create an SPSS database in which each site is a case having a traffic characterization, the TTC distribution, as its set of variables (10 total). When the hierarchical cluster analysis is run, the Euclidean distance between each site is calculated as given by the squared Euclidean distance formula previously. Table 3-9 shows this calculation for the two sites with the lowest Euclidean distance, 8229 and 5019.

Table 3-9. Euclidean Distance Calculation Between Site 8229 and Site 5019

TTC	Site 5019 TTC	Site 8229 TTC	Squared Euclidean Distance (SED)
VC4	1.74	2.46	0.511
VC5	23.60	23.46	0.018
VC6	3.59	4.32	0.527
VC7	0.36	1.40	1.077
VC8	4.78	4.07	0.501
VC9	49.27	50.08	0.660
VC10	8.73	5.78	8.683
VC11	1.39	1.65	0.068
VC12	0.18	0.56	0.147
VC13	6.36	6.22	0.021
		Summation	12.21

Once Euclidean distances are calculated between each site, Ward's method is applied in which the cluster being formed has the lowest change in the sum of squares within the cluster. The sum of squares is calculated by first taking an average of each variable (TTC percentage for all VCs) for all sites within the cluster. The squared distance between the variable mean values for the cluster and the specific case variable

values within the cluster is then computed. The summation of these computations across all cases is the sum of squares for the cluster. As an example, the sum of squares for the joining of site 8229 and site 5019 is shown in Table 3-10.

Table 3- 10. Computation of Sum of Squares for First TTC Cluster

TTC	Site 5019	Site 8229	Mean TTC	Site 5019 (SS)	Site 8229 (SS)
VC4	1.74	2.46	2.10	0.128	0.128
VC5	23.6	23.46	23.53	0.005	0.005
VC6	3.59	4.32	3.95	0.132	0.132
VC7	0.36	1.4	0.88	0.269	0.269
VC8	4.78	4.07	4.43	0.125	0.125
VC9	49.27	50.08	49.67	0.165	0.165
VC10	8.73	5.78	7.26	2.17	2.17
VC11	1.39	1.65	1.52	0.017	0.017
VC12	0.18	0.56	0.37	0.037	0.037
VC13	6.36	6.22	6.29	0.005	0.005
			Summation	6.1	05

Table 3-10 reveals that the sum of squares for the clustering of site 8229 and site 5019 is half the Euclidean distance between the two. This is indeed mathematically the case when forming a cluster having only two sites. As sites of more than two begin to form however, this will not occur. The algorithm of adding a new site to a cluster based on the lowest increase in within cluster sum of squares continues until all cases are in one group. An icicle plot depicting the formation of clusters can be shown in Figure 3-1.

Figure 3-1, starting from the bottom upwards, shows that the sites that form the first cluster in the analysis are site 8229 and site 5019. It follows that the second connection of site 7159 and site 7029 corresponds to the second cluster, continuing until all sites have been merged at the top of Figure 3-1.

At each cluster it is necessary to know what the overall clustering Euclidean distance is when a site is formed as it aids in determining when increasingly dissimilar sites are being formed; This corresponds to higher clustering Euclidean distances. The additional

clustering Euclidean distance when a new cluster is formed is defined as half the largest squared Euclidean distance between the new site in the cluster and any existing site within the cluster. It follows then that the clustering Euclidean distance when forming site 8229 and site 5019 is 6.105. This value should not be confused with the sum of squares, as when more than two sites are within a cluster, the highest Euclidean distance pair and the sum of squares within the cluster will be different. Subsequently, the clustering distance for the second cluster becomes the clustering distance from the previous cluster, 6.105, added to half the largest squared Euclidean distance between the new site and any existing site within the cluster. This computation continues for every new cluster formed. An illustration of these distances is depicted through a dendogram shown in Figure 3-2.

In Figure 3-2, the large jumps in scaled Euclidean distance during the formation of two main clusters and ultimately one large cluster are indicative of very dissimilar groups being formed when compared to prior clusters. In cluster analysis, the amount of clusters formed can be a combination of user input in conjunction with the dendogram. It should be noted that the dendograms are rescaled so that the total clustering Euclidean distance is 25. As there was relatively little knowledge of the data, to maintain objectivity in the formation of clusters, a scaled cluster distance value of 7 was selected to establish the number of clusters for each traffic characterization. Using this value, the clusters formed are as shown in Figure 3-2. The numbering scheme corresponds to that used in the cluster analysis results to follow.

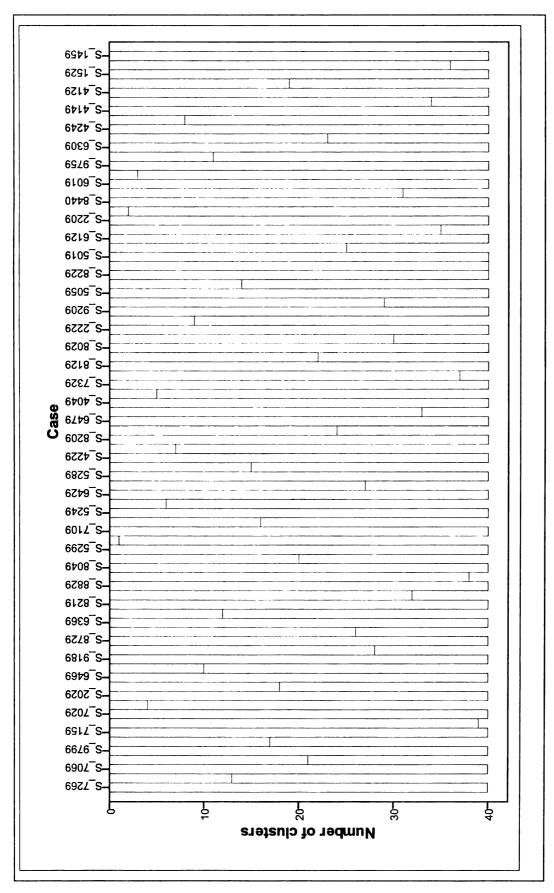


Figure 3-1. Icicle Tree Cluster Diagram for TTC Traffic Characterization

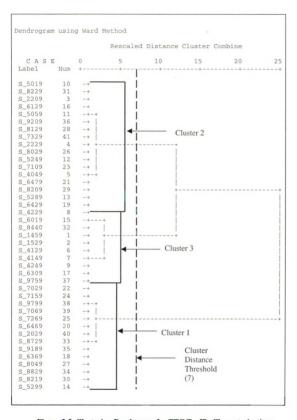


Figure 3-2. Clustering Dendogram for TTC Traffic Characterization

This clustering process was repeated for all other traffic characterizations. The established traffic characterizations are as follows: TTC, HDF, MDF, AGPV and single, tandem tridem and quad annual axle load.

## 3.4.4 Practical Significance of Developed Traffic Characterizations

The practical assessment of utilizing Level II, clustered inputs (cluster averages), and Level III, statewide (average of all sites) over site specific data was done through a rigid and flexible pavement performance comparison. The base designs and thicknesses were those created for the data coverage comparison. Level II inputs were established by taking the average of the traffic characterization from all sites within that cluster. Level III inputs were developed by taking an average of all sites used in the analysis. It is important to note that M-E PDG default values was also incorporated into the analysis to provide alternate Level III data for comparison.

The various site-specific data were replaced by the developed traffic characteristics on an individual basis holding all other variables constant. The resulting flexible and rigid pavement performance distresses reviewed previously were compared with site specific outputs to obtain differences in pavement life performance. The results of this analysis established the associated error in predicted performance when using Level II and Level III as compared to site-specific data. The various traffic characterization schemes assessed for the rigid and flexible analysis are shown in Table 3-11.

Table 3-11. Traffic Characteristics Created and Compared in the M-E PDG

	Cluster Average St		Statewide	e Average	M-E PDG I	Default
	Rigid	Flexible	Rigid	Flexible	Rigid	Flexible
HDF	X	X	X	X	X	
MDF	X		X	X	X	
TTC	X	X	X	X	X (Comp to TTC Avg)	
AGPV	X	X	X	X	X	
Single Axle Load Spectra	X	X	X	X	X	
Tandem Axle Load Spectra	X	X	X	X	X	
Tridem Axle Load Spectra	X	X	X	X	X	
Quad Axle Load Spectra	X	X	X	X	X	

The difference in traffic schemes between rigid and flexible analysis was due to the trends seen first in the rigid analysis. This will become apparent in a review of the results in Chapter 4.

#### 3.5 DISCRIMINANT ANALYSIS PROCEDURE

Depending on the results of the effects of the hierarchical traffic characterizations on pavement performance life, it may be necessary to utilize cluster average (Level II) inputs over statewide or the M-E PDG defaults (Level III). However, the inherent difficulty that lies within this process is the selection of the *appropriate* Level II input for the given site to be designed. Thus it becomes necessary to develop an algorithm that will assist in selecting the proper Level II traffic characteristic for design by correlating it to known physical characteristics of the site. The technique that was administered in this project for such a purpose was discriminant analysis.

Discriminant analysis develops a set of linear regression equations (one less than the number of dependent variable categories) that take a group of known parameters, known

as predictor variables, as inputs into the equation and uses the output of that equation to select the appropriate cluster group for the dependent variable. An example of such a linear equation is shown in Equation 27, where

$$y = b_1 x_1 + b_2 x_2 + \dots b_{(n-1)} + b_n + c$$
(3.12)

The b coefficients are the regression coefficients that are outputs determined through the discriminant analysis. There are as many coefficients as there are independent variables, n, in the analysis. The x variables in Equation 3.12 are the actual values of the independent variables at a given site and c is a constant.

In the case of this study, the dependent variable would be a given traffic characterization (i.e TTC, HDF, Tandem Axle Load Spectra) and the predictor variables would be known properties of the site to be designed. Examples of such properties that would be available and known by the MDOT prior to design would be:

- Vehicle freight commodity truck percentage for the following commodities:
  - o Secondary Traffic
  - o Clay, Cement, Glass and Stone Products
  - o Food Products
  - o Fabricated Metal Products
  - o Transportation Equipment
  - Primary Metal Products
  - Chemical Products
  - Logs, Lumber and Wood Products
  - Farm Products
  - o Petroleum or Coal Products

- o Machinery
- o Rubber and Plastics
- o Waste or Scrap Metal
- o Paper and Pulp Products
- Nonmetallic Ores and Minerals
- o Furniture and Fixtures
- o Miscellaneous Manufacturing Products
- o Printed Matter
- o Electrical Equipment
- o Empty
- Functional class (urban/rural setting)
- Average trip distance (long haul or local trip distinction)
- Road class (Interstate, US highway, Michigan road)
- AADTT
- Vehicle class percentage (assuming the MDOT takes classification counts)
- Geographic location (region within Michigan)
- Yearly truck tonnage

Vehicle freight commodity percentage, functional class, average trip distance and tonnage are all information that can be acquired from the planning department within the MDOT prior to the design of the road. AADTT and vehicle class percentage could also be determined through counting efforts. The geographic location was stratified into the seven regions designated by the MDOT as shown in Figure 3-3.



Figure 3-3. MDOT Regions Within Michigan Utilized for Discriminant Analyses.

It should be noted that SPSS requires the independent variables to be in numerical form for discriminant analysis. Accordingly, the MDOT regions were each given a numerical designation. Also, the functional class was changed numerically to reflect either rural (1) or urban (2) site conditions. Finally road class was changed numerically to be interstate (1), US highway (2), and Michigan road (3).

From the established list of available physical data regarding the site, it was necessary to determine which specific variables could be used to establish differences between clustered (Level II) traffic characterizations. Since the equation is linear in nature, a Pearson correlation matrix was established between all predictor variables and the traffic characterization cluster groups to evaluate the linear relationships amongst variables. As

will be shown in the M-E PDG analyses, it was determined that that HDF, TTC, and tandem axle load spectra would need at a minimum Level II data. As such correlation between the cluster group designation of these particular traffic characterizations and the predictor variables was paramount. Only predictor variables (site properties) that had a significant correlation above 0.4 were considered for use in the discriminant analysis. The predictor variables selected for use in the discriminant analysis are outlined below.

The correlation values can be found in Table A-5 and A-6 of Appendix A.

- Vehicle freight commodity truck percentage for the following commodities:
  - Food Products
  - Fabricated Metal Products
  - o Transportation Equipment
  - o Logs, Lumber and Wood Products
  - Machinery
  - o Rubber and Plastics
  - o Paper and Pulp Products
  - Furniture and Fixtures
  - o Miscellaneous Manufacturing Products
  - o Printed Matter
  - o Electrical Equipment
- Road and Functional class (rural/urban)
- Geographic region
- AADTT
- VC 5% and VC 9%

### • Roadway annual tonnage

A complete listing of the values for each of these site characteristics can be found in Table A-7 and A-8 of Appendix A. It should be noted that it is expected that traffic classification data will be provided, either from counts or selected through the discriminant analysis algorithm for TTC. Consequently VC 5% and VC 9% were included as part of the independent variables, excluding TTC.

An example using HDF as the dependent variable is presented to demonstrate the process of the discriminant analysis, explaining critical components. Since HDF has three categories, the analysis will produces two functions to facilitate the cluster selection. The first equation developed attempts to maximize the differences in the dependent variable by altering the coefficients of the predictor variables. The second equation and subsequent equations (for those traffic inputs with more than three clusters) tries to maximize the difference between dependent variables to account for the remaining variability not captured in the first equation. Generally speaking, the first function is the most powerful and contributes the most toward discriminating among the dependent variable (23).

Once the set of predictor variables are established for each site, they were placed in SPSS along with the dependent variable (classification grouping for each site) and the discriminant analysis was run. There are a number of outputs that SPSS produces in addition to the discriminating equations that explain the significance of the variables involved, validate assumptions, and assess the value of the model as a whole. Each will be explained subsequently.

The first output that SPSS produces is the Wilks' Lambda test for significance of variables. The test is a univariate analysis of variance (ANOVA) which determines if the means of the particular predictor variable are different amongst the traffic input clusters (three in the case of the HDF groups as will be shown in Chapter 4) (23). A value of one suggests that all means are equal whereas a value close to 0 indicates that group means significantly differ. It is desirable to have a value as close as possible to zero, as the model would be more effective in discriminating the dependent variable. Table 3-12 displays the results of this test for the aforementioned predictor variables for the case of the single axle load spectra clusters.

Table 3-12 reveals that, with the exception of functional class, paper and pulp products, and logs lumber and wood products, the means of the discriminating variable are significantly different between the HDF groups (p < 0.05). It should be noted that this significance does not necessarily suggest that the variable will effectively discriminate. This means that, even though the average value could be different across clusters, the weight assigned to it (coefficient) in the discriminant equation could still be insignificant. A significant result here is only indicative that the variable can potentially be effective at discriminating the dependent variable.

Table 3-12. Wilks' Lambda Results for Predictor Variables used in Single Axle Load Spectra Cluster

Tests of Ed	Tests of Equality of Group Means								
	Wilks' Lambda	F	df1	df2	Sig.				
Region	.854	2.817	2	33	.074				
Functional Class	.897	1.904	2	33	.165				
Food Product Truck %	.739	5.818	2	33	.007				
Fabricated Metal Products Truck %	.786	4.489	2	33	.019				
Machinery Truck %	.638	9.361	2	33	.001				
Rubber and Plastics Truck %	.741	5.754	2	33	.007				
Furniture and Fixtures Truck %	.793	4.301	2	33	.022				
Electrical Equipment Truck %	.768	4.983	2	33	.013				
Total Tons	.493	16.998	2	33	.000				
VC 5 %	.594	11.272	2	33	.000				
VC 9 %	.375	27.547	2	33	.000				
AADTT	.439	21.080	2	33	.000				
Miscellaneous Manufacturing Products Truck %	.681	7.725	2	33	.002				
Road Class	.750	5.498	2	33	.009				
Printed Matter Truck %	.813	3.796	2	33	.033				
Paper and Pulp Products Truck %	.996	.065	2	33	.937				
Logs, Lumber and Wood Products Truck %	.883	2.180	2	33	.129				
Transportation Equipment Truck %	.772	4.878	2	33	.014				

The next output produced by SPSS is the Box M test. This procedure tests for homogeneity of variances amongst the predictor variables within each cluster group, which is an assumption in discriminant analysis. A result of significance (p < 0.05) forces a rejection of the null hypothesis which states that the group variances are equal (23). In this analysis, the sample size is small (41 values) and in some cases the cluster sizes are uneven. This will result in the Box M test being significant in nearly all cases, violating the assumption of equal variances. However it has been stated in literature that the procedure can still be used despite this violation (23). Accordingly the results of the Box M will not be discussed.

Following the Box M, SPSS outputs several elements that determine how well the regression functions obtained classify the dependent variable and account for the variance among groups. These elements are the eigenvalue, canonical correlation and the Wilk's lambda. The eigenvalue reflects how well a discriminating function explains the variability in the dependent value. High eigenvalues indicate that variation is captured well with the given function and thus discriminate among the groupings effectively. Similarly canonical correlation is a measure of how well the function matches the cluster groups formed in the dependent variable. A correlation of 1 is indicative that the dependent variable can be entirely explained by the discriminating function (23). The eigenvalues and canonical correlation can be seen in Table 3-13.

Table 3-13. Eigenvalue and Canonical Correlation for HDF Discriminant Functions

Eigenvalues							
Function	Eigenvalue	% of Variance	Cumulative %	Canonical Correlation			
1	6.739	82.8	82.8	.933			
2	1.397	17.2	100.0	.763			

For the HDF model, the first function explains the variation very well, as indicated by a high eigenvalue, 6.7, and canonical correlation of 0.93, which is close to 1. Both values indicate that the function sufficiently discriminates the dependent variable.

The Wilk's Lambda for the model tests whether or not the discriminant functions are effectively discriminating between the clusters. The Wilk's Lambda for the HDF model can be found in Table 3-14. A finding of significance for the first row, which tests the entire model (all discriminant functions), rejects the null hypothesis that the cluster mean

discriminant scores between cluster groupings are equal. (The discriminant scores are the output values when the independent variables from a given site are put into the discriminant functions) (23).

Table 3-14. Wilk's Lambda Test for Significance of Model

Test of Functions	Wilks' Lambda	Chi- square	df	Sig.
1 through 2	.054	71.553	36	.000
2	.417	21.420	17	.208

Once the overall model has been evaluated for how successful it discriminates, the individual components of the model are reviewed. SPSS outputs a set of standardized discriminant coefficients that reveal the relative importance (discriminating power) of each independent variable in the established functions. The larger the standardized discriminant coefficient variable is, the more discriminating power it has (23). Table 3-15 displays these standardized coefficients for the two functions created for the HDF dependent variable.

Table 3-15 reveals that Miscellaneous Manufacturing Products Truck %, VC 9%, Total Tons and Machinery Truck % hold the most discriminating power in function 1, and thus the overall model. It is these values that will be more influential in classifying the HDF groups. However, it should not be assumed that the rest of the variables could be ignored. They contribute, although on a smaller scale, to the overall effectiveness of the model. Additionally, deletion of variables will cause the standardized coefficient, and accordingly the overall model, to change. This could reduce the discriminatory power of the model.

**Table 3-15. Standardized Canonical Discriminant Function Coefficients** 

Predictor Variable	Fund	ction
riedictor variable	1	2
Region	.102	526
Functional Class	694	019
Food Product Truck %	.248	901
Fabricated Metal Products Truck %	695	266
Machinery Truck %	1.302	353
Rubber and Plastics Truck %	987	1.315
Furniture and Fixtures Truck %	329	159
Electrical Equipment Truck %	1.124	487
Total Tons	1.426	955
VC 5 %	.982	.577
VC 9 %	1.821	.013
AADTT	086	1.159
Miscellaneous Manufacturing Products Truck %	-2.154	.989
Road Class	.904	.175
Printed Matter Truck %	.454	338
Paper and Pulp Products Truck %	534	1.102
Logs, Lumber and Wood Products Truck %	.434	-1.313
Transportation Equipment Truck %	1.004	.494

Once the individual variables and the model have been assessed for its discriminatory capability, the regression coefficients used for the discriminant function seen in Equation 3-12 are determined. The regression components for the two functions established for the HDF dependent variable are shown in Table 3-16.

**Table 3-16. Regression Coefficients Created by SPSS** 

	Fun	ction
	1	2
Region	.062	319
Functional Class	150	004
Food Product Truck %	.091	329
Fabricated Metal Products Truck %	320	122
Machinery Truck %	1.379	374
Rubber and Plastics Truck %	879	1.171
Furniture and Fixtures Truck %	620	300
Electrical Equipment Truck %	1.170	507
Total Tons	1.395E-7	-9.347E-8
VC 5 %	.083	.049
VC 9 %	.166	.001
AADTT	.0001	.001
Miscellaneous Manufacturing Products Truck %	-7.435	3.413
Road Class	1.572	.303
Printed Matter Truck %	1.400	-1.042
Paper and Pulp Products Truck %	148	.305
Logs, Lumber and Wood Products Truck %	.098	298
Transportation Equipment Truck %	.313	.154
(Constant)	-13.812	356

Once the equations are established, SPSS then tries to cluster each site in the analysis into an appropriate cluster based on the discriminant score from the inputted coefficients and independent variable values into the regression equations. To aid the user in classifying a given site, SPSS outputs a territorial map as shown in Figure 3-4.

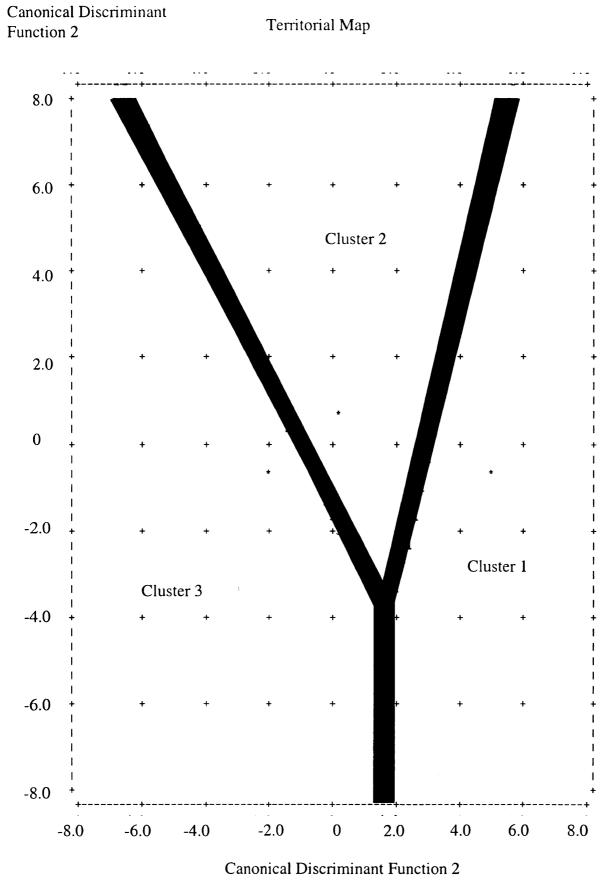


Figure 3-4 Territorial Map for Classification of Dependent Variable

The discriminant score is calculated for each function and then plotted on the territorial chart. The boundary areas for each of the cluster groupings are as marked in Figure 3-4. The "+" symbols are reference points for plotting and the "\*" is the discriminant score based on using the predictor variable cluster means. The region that the plotted point resides in is the cluster grouping the site will be placed in. To illustrate this procedure, data from site 1459 can be used as an example. The discriminant equations, function 1 and function 2, developed for HDF are shown in Equation 3-13 and 3-14 respectively.

$$y = 0.062*(R) - 0.150*(FC) + 0.091*(FP) - 0.320*(FMP)$$

$$+1.379*(M) - 0.879*(RP) - 0.620*(FF) + 1.170*(EE)$$

$$+1.135E - 7*(TT) + 0.083*(VC5) + 0.166*(VC9) + 0.0001*(AADTT) - (3.13)$$

$$7.435*(MMP) + 1.572*(RC) + 1.400*(PM) - 0.148*(PP) + (PP) + (PP)$$

Thus the point plots (-2.05, 1.00) as shown in Figure 6, classifying site 1459 in cluster 3. This is, in fact, where site 1459 was clustered for the HDF traffic characterization.

An alternative to utilizing the two function regression equation and territorial plot is to use Fisher's linear discriminant functions. These functions are in the same form as the regression functions of Equation 3-12 and derived from the developed two-function discriminant model. The difference in Fisher's function is that the variable coefficients are not the same and that there are as many functions as there are cluster groupings for the independent variable. Rather than plot the point on a territorial map, the discriminant

scores, (now called classification scores) are calculated for each Fisher function. The site is then assigned to the cluster whose corresponding function produces the highest discriminant score (23). The developed Fisher linear discriminant coefficients for the HDF dependent variable are shown in Table 3-17.

Table 3-17. Fisher's Linear Discriminant Coefficients for HDF Variable

		HDF	
	1	2	3
Region	.854	1.353	.507
Functional Class	-1.451	675	291
Food Product Truck %	-4.838	-4.457	-5.400
Fabricated Metal Products Truck %	-2.927	984	409
Machinery Truck %	21.080	14.999	10.592
Rubber and Plastics Truck %	-15.924	-14.435	-9.627
Furniture and Fixtures Truck %	-7.998	-4.070	-3.091
Electrical Equipment Truck %	14.782	10.109	5.963
Total Tons	2.880E-6	2.408E-6	1.843E-6
VC 5 %	4.098	3.552	3.440
VC 9 %	5.574	4.723	4.291
AADTT	0044	0074	0042
Miscellaneous Manufacturing Products Truck %	-116.520	-87.319	-60.573
Road Class	32.470	23.673	20.212
Printed Matter Truck %	57.649	53.170	47.277
Paper and Pulp Products Truck %	-1.504	-1.529	488
Logs, Lumber and Wood Products Truck %	1.886	2.145	1.250
Transportation Equipment Truck %	4.685	2.697	2.209
(Constant)	-276.774	-189.364	-156.574

Once the regression coefficients were derived, the classification scores could be calculated. The linear equations and classification scores for each HDF cluster 1-3 is contained in Equations 3-15 to 3-17, respectively.

$$y = 0.0854*(R) - 1.451*(FC) - 4.838*(FP) - 2.927*(FMP)$$

$$+ 21.080*(M) - 15.924*(RP) - 7.998*(FF) + 14.782*(EE)$$

$$+ 2.880E - 6*(TT) + 4.098*(VC5) + 5.574*(VC9) - 0.0044*(AADTT) - (3.15)$$

$$116.52*(MMP) + 32.470*(RC) + 57.649*(PM) - 1.504*(PP) + (PM) + 1.886*(LLW) + 4.685*(TET) - 277.74 = 125.414$$

$$y = 1.353*(R) - 0.675*(FC) - 4.457*(FP) - 0.984*(FMP) + (PM) + (PM)$$

From Equations 3-15 to 3-17, HDF cluster 3 is again selected for site 1459 as it has the highest classification score. As this technique is numerically definitive in classifying values as opposed to judging spatially on the territorial map, Fisher's linear discriminant coefficients is recommended for clustering sites for dependent variables which require cluster averages (Level II) as inputs into the M-E PDG.

SPSS automatically classifies each site used in the analysis and compares the predicted cluster membership using the discriminant functions with the original cluster memberships assigned to the site. This output is displayed in Table 3-18.

Table 3-18. Classified Sites into HDF Clusters Through Discriminant Analysis

		TTC	Predicted Group Membership			Total
			1	2	3	
		1	5	0	0	11
	Count	2	0	16	1	16
Original	riginal	3	0	0	14	9
Original		1	100.0	.0	.0	100.0
•	%	2	.0	94.1	5.9	100.0
		3	.0	.0	100.0	100.0

The discriminant analysis correctly classified 97.2% of the sites with the developed regression equations. As such, if cluster averages are needed for this traffic input, selection of the appropriate HDF can be done with a significant amount of reliability then randomly guessing. The discriminant analysis was applied to all traffic inputs which required cluster averages as a design input. These specific inputs will be identified and discussed in Chapter 4.

## CHAPTER 4 - RESULTS AND DISCUSSIONS

This chapter contains a summary of the results of all analyses conducted for the research project as reviewed in Chapter 3. The presentation of this data serves as a basis to qualify the conclusions and recommendations presented at the end of this thesis. The analyses results are categorized and presented in five main parts.

- Selection of final sites for analyses
- Identification of the M-E PDG traffic element selected for further analyses
- Effect of data coverage between OWPM and continuous data
- Traffic characterization (development and clustering)
- Impact of traffic characterization on M-E PDG outputs
- Presentation of discriminant equations to determine appropriate Level II inputs

## 4.1 SELECTION OF FINAL SITES FOR ANALYSES

The axle load distributions and TTC for all sites with available data were evaluated for potential errors according to the QC procedures outlined in Section 3.1.4. The following observations were made with regard to potentially erroneous data:

- Site 1459-Bark River had high single axle loadings (41 kips) for VC 4 and VC 8 vehicles for the months of June, August and December.
- Site 5019-St. Johns had a high single axle loading (39 kips) for VC 4 in August.
- Site 5249-Morley had high single axle loading spikes (41 kips) across all VCs.
- Site 7289-Bangor had an abnormally high presence of VC 13 vehicles (38%).
- Site 8049-Fowlerville had a very high single axle load spike (34 kips) for VC4 in July which constituted nearly 50% of all axles. This was an indication that the scale failed at one point during the month.

- Site 6349-Flint (OWPM data) had a flat axle load spectra across all axle load spectra.
- Site 8249-Luna Pier had a shift in peak loading values, almost 10 kips in some instances, from 11 kips and 30 kips.

It should be noted most sites contained axle load spectra with some very small percentage, less than 1%, of the truck volume in an abnormally high range. The aforementioned sites had percentages greater than this.

The results of the quality control check highlighted some potential erroneous data within certain months of a year for a specific site. The extensive failures found at Sites 6349, 7289, and 8249 were reason for their removal from the analyses. However, since annual averages were used for analysis since little monthly variation was found in the literature, the effect of the high one-month variation spikes was minimized due to averaging. As such, data for these sites were accepted as part of the analyses. The final data summary for the continuous and OWPM is shown in Table 4-1. The final sites utilized for OWPM and continuous analysis are compiled in Table A1 and Table A2 of Appendix A. Shaded sites indicate OWPM data that was not used while an "X" represents continuous data that were excluded from the analyses.

Table 4-1. Quantity of Weight and Classification Data for One Week Per Month and Continuous Data

Type of Data	OWPM	Continuous
Weight and Classification	34	36
Weight Only	1	0
Classification Only	3	5
Total	38	41

A basic review of location properties for the sites used in the analyses is shown in Table 4-2.

Table 4-2. Summary Statistics of the MDOT WIM and Classification Sites

Parameter	Number of Sites
Setting	Rural: 29 Urban: 12
Functional Class	Urban Interstate: 8 Urban Arterial/Fwy: 5 Rural Interstate: 10 Rural Arterial/Fwy: 13 Rural Minor Arterial: 5
Sensor Type	Piezo: 18 Bending Plate: 3 Quartz: 20

# **4.2 IDENTIFICATION OF NECESSARY ELEMENTS FOR TRAFFIC CHARACTERIZATION**

While there are 13 traffic related inputs provided in the M-E PDG, emphasis was placed on the following traffic characteristics for establishing hierarchical traffic inputs:

- Truck Traffic Classification (TTC)
  - o Percentage of truck traffic for each FHWA vehicle class 4-13, ten total
- Monthly Distribution Factor (MDF)
  - o Set of 12 factors, one for each month
- Hourly Distribution Factor (HDF)
  - o Set of 24 factors, one for each hour
- Axle Groups per Vehicle (AGPV)
  - o Single, Tandem, Tridem, Quad
- Axle load dist/spectra

Loading proportions for each vehicle class and each axle group, 40 total The aforementioned traffic characterizations were selected based on the ability to develop a hierarchical structure for design purposes. AADTT, an essential traffic component, was excluded from analyses as it was expected that AADTT would be known prior to design. Consequently AADTT hierarchical inputs are not applicable to this research. AADTT was only characterized for the possible purpose of using in discriminant analysis as a possible discriminatory variable for the selection of Level II data. The remaining data elements will be used to assist in forming the hierarchical inputs in the ME-PDG.

# 4.3 EFFECT OF DATA COVERAGE BETWEEN OWPM AND CONTINUOUS DATA

The impact of using OWPM data in lieu of continuous data was assessed in terms of differences in traffic input values and differences in pavement performance life as predicted by the M-E PDG. Establishing significant differences in input values allow for possible explanation of differences in pavement performance life for both rigid and flexible pavements.

# **4.3.1 Traffic Input Differences**

The numerical traffic input differences were calculated and normalized for all traffic inputs as outlined in Chapter 3 with the results displayed in Tables B-1-B-6 of Appendix B. Statistical analysis was conducted to summarize data and draw conclusions. It is important to note here that site 6469-Port Huron and site 6019-Carsonville was missing OWPM classification and weight data, respectively. Additionally all classification sites with OWPM and continuous data, Site 2209-Deerton and Site 9799-Cicotte do not contain weight data. To ensure that all data could be compared numerically both from a

traffic input standpoint and a M-E PDG performance input these sites were eliminated from all analyses as comparisons could not be made in the M-E PDG. These sites are shaded in Table A-1 and A-2 in Appendix A. Thus a total of 34 sites with both OWPM and continuous data were used in the analyses and are shown unshaded and without an asterisk in Table A-1 and Table A-2 in Appendix A. The mean, standard deviation, and 95% confidence intervals (CIs) for the normalized differences from each traffic input were calculated. It was assumed that the WIM stations were independent sites and the traffic characterizations created were random independent samples from a normal population. One sample *t*-test and paired *t*-tests for the differences between continuous and OWPM data were performed (tested against 0) to determine if the difference was significant (*p*-value less than 0.05 for 95% two-tailed test). The *t*-test could not be performed for the MDF and HDF values as the differences were all positive values. The results of the statistical analyses are presented in Table 4-3.

The average AADTT difference is approximately 3.2% with a CI roughly between 2.3% and 4.1%. The AADTT average difference appears to be lower than the M-E PDG research findings of 5-10%. The confidence interval (CI) for VC 9 was between -0. 48% an -0.05%. A review of the data found that Site 1459-Bark River had a percentage difference of -10.17%. The next largest difference out of the 35 sites analyzed was less than half that value, -4.59% from site 8049. This indicated that site 1459 is an outlier and is causing the bias towards OWPM over predicting the average tandem VC 9 axle load. Despite this bias, a 95% CI bound of less than 0.5% seems acceptable from a practical perspective. Actual differences in AGPV approached zero. Confidence intervals at 95% for the difference in average axle load values and TTC percentages for all assessed values

fell within 1 % of zero. Both traffic characterization differences were within the 1-2% difference specified by the M-E PDG manual. Besides AADTT, the MDFs seemingly experienced the most variation. Knowing that the default value for MDFs is 1 in the M-E PDG, average magnitude differences between 0.08 (VC 8-10) up to 0.16 (VC 11-13) suggesting possible differences in values of 10% to 20%. The VC 5 single and tandem axle load had standard deviations close to 2% with a 95% CI of almost 1%. This variation is on the same scale as VC 9 and could have some implications in pavement performance life as it possibly can have the same volume of trucks on the roadway. The effect of these differences was explored through a comparison in the M-E PDG.

Table 4-3. Statistical Analysis Results for Difference in Traffic Characterizations
Using OWPM and Continuous Data

	Mean Diff	Std.	Std.	CI Min	CI Max	t value	df	Sig. 2
		Dev.	Error		<u> </u>			Tailed
AADTT	3.22%	2.46%	0.42%	2.36%	4.08%	7.63	33	0.000
TTC VC4-7	0.30%	1.21%	0.21%	-0.12%	-0.73%	1.46	33	0.153*
TTC VC8-10	-0.36%	1.11%	0.19%	-0.75%	0.03%	-1.88	33	0.068*
TTC VC11-13	0.06%	0.62%	0.11%	-0.16%	0.27%	0.52	33	0.606*
MDF VC4-7	0.12	0.07	0.01	0.09	0.15	N/A	N/A	N/A
MDF VC8-10	0.08	0.02	0.00	0.07	0.08	N/A	N/A	N/A
MDF VC11-13	0.16	0.12	0.02	0.11	0.20	N/A	N/A	N/A
HDF	0.07%	0.04%	0.01%	0.05%	0.08%	N/A	N/A	N/A
Single AGPV	0.0112	0.2733	0.0148	-0.0180	0.0404	0.76	339	0.450*
Tandem AGPV	-0.0001	0.0237	0.0013	-0.0033	0.0018	-0.57	339	0.567*
Tridem AGPV	-0.0019	0.0265	0.0026	-0.0070	0.0032	-0.74	104	0.464*
Quad AGPV	0.0047	0.0296	0.0029	-0.0011	0.0104	1.62	104	0.109*
SA VC5	-0.21%	1.82%	0.31%	-0.84%	0.43%	-0.67	33	0.510
TA VC5	0.03%	1.43%	0.25%	-0.47%	0.53%	0.12	33	0.905
SA VC9	-0.07%	0.41%	0.07%	-0.21%	0.07%	-1.02	33	0.314
TA VC9	-0.26%	0.62%	0.11%	-0.48%	-0.05%	-2.50	33	0.018
SA VC13	-0.13%	1.74%	0.30%	-0.74%	0.47%	-0.45	33	0.656
TA VC13	0.44%	1.32%	0.23%	-0.02%	0.90%	1.95	33	0.059

<sup>\*</sup> Indicates Paired t-test

# 4.3.2 Statistical Significance of M-E PDG Rigid Output

The comparison between OWPM and continuous data predicted pavement performance life was established by subtracting OWPM performance life from continuous performance life (in years). This resulted in 34 values for comparison, referred to as the performance life difference. In all cases, it is assumed that the continuous data, and resulting performance life represents the true values of the site. Using the difference in this manner allows positive values to represent under prediction in pavement life. This implies that OWPM performance life has a shorter performance life than what actually occurs, which is conservative. In contrast, a negative value is indicative of an over prediction of performance life. This implies that the OWPM performance life has a longer performance life than what actually occurs, which is unconservative. As noted previously, it was found that AADTT, MDFs, VC 5 and VC 9 had significant traffic input differences, either statistically or practically, with VC 5 having an equal amount of variation as VC 9. Since AADTT, VC 9 and VC 5 have a direct influence in the volume and truck type in the traffic stream was deemed important to see if any observed differences in pavement performance life between OWPM and continuous data could be attributed to differences in these traffic inputs. To facilitate this, in addition to the continuous and OWPM runs, OWPM data using continuous AADTT, OWPM data using continuous VC 9 single and tandem loads and OWPM data using VC 5 single and tandem loads were also analyzed in the M-E PDG. The performance lives for all OWPM vs. continuous rigid pavement runs is contained in Table B-7 of Appendix A. Descriptive statistics and 95% CIs for the difference in performance life were calculated and are shown in Table 4-4.

Table 4-4. Statistical Summary of Difference in the M-E PDG Rigid Performance Life (in yrs) when Using OWPM vs. Continuous Data

	Performance Life Differences							
	Basic Statistics						95% Confidence Interval	
Continuous vs.	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Lower	Upper
OWPM	34	-1.45	1.06	0.18	-3.25	1.17	-1.81	-1.08
OWPM Using Continuous AADTT	34	-0.71	0.90	0.15	-2.33	1.25	-1.03	-0.40
OWPM Using Continuous VC5 Single and Tandem Axle Load	34	-1.42	1.04	0.18	-3.33	0.92	-1.79	-1.06
OWPM Using Continuous VC9 Single and Tandem Axle Load	34	-1.57	0.89	0.15	-3.08	1.08	-1.88	-1.26

The first step in the analysis was to assess if OWPM data was comparable to continuous. This was performed through a paired *t*-test using the recorded performance life for each of the data coverage lengths. The results of the paired *t*-test are shown in Table 4-5. Referring to Table 4-5, it is observed that OWPM is different than continuous data; OWPM data over-predicts pavement life with a 95% reliability of one to two-years.

Table 4-5. Paired t-test Between Continuous and OWPM Data for Rigid Pavement Performance Difference

	Paired Differences (in years)								
				95% CI of the Difference		Difference		df	Sig.
	Mean	Std. Deviation	Std. Error Mean	Lower	Upper		ai	tailed)	
Cont. – OWPM (Rigid)	-1.445	1.058	0.181	-1.814	-1.076	-7.967	33	0.000	

To test whether the significant difference in pavement performance life between OWPM and continuous data is due to the observed differences in traffic inputs, three additional performance runs were generated and are as follows:

- OWPM and continuous AADTT data
- OWPM and continuous VC 5 single and tandem axle loads
- OWPM and continuous VC 9 single and tandem axle loads

An one-way ANOVA was conducted on the difference in performance life each run variation had from the continuous data. This was done to assess if any one of the three variables altered contributed significantly to the observed difference in performance life between OWPM and continuous data. Each site was considered to be a random independent sample from a normal distribution. The ANOVA is shown in Table 4-6.

Table 4-6. One-Way ANOVA Results for Difference in Means for Rigid Pavement

	Sum of Squares	df	Mean Square	F	Sig.
Between Groups	15.463	3	5.154	5.411	.002
Within Groups	125.734	132	0.953		
Total	141.196	135			

Table 4-6 shows that the ANOVA test was significant (p << 0.05); at least one of the OWPM runs is different from another. In order to determine the interaction between runs, Tukey's contrast was applied to discover which particular group mean(s) is different from another. Table 4.5 summarizes the result of Tukey's test. A summary of ANOVA and Tukey's contrast can be found in the literature (24). In Table 4-7, the numbers correspond to the following:

- 1. OWPM data
- 2. OWPM data with continuous AADTT
- 3. OWPM data with continuous VC 5 axle load values
- 4. OWPM data with continuous VC 9 axle load values

Table 4-7 reveals that OWPM data with continuous AADTT has a statistically significant different mean value than those from the other data sets (p < 0). Since week data with continuous AADTT produced the closest mean value to zero as well as the lowest confidence interval, the data suggests that use of continuous AADTT in conjunction with other OWPM is needed for improved accuracy in rigid pavement.

Table 4-7. Tukey's Contrast Test for Testing Differences of Means Within Groups

(I)	(J)	Mean Difference	Std.	C:-	95% Confidence Interval		
FACTOR	FACTOR	(I-J)	Error	Sig.	Lower Bound	Upper Bound	
	2	-0.734*	0.237	0.012	-1.3503	-0.119	
1	3	-0.022	0.237	1.000	-0.640	0.594	
	4	0.123	0.237	0.954	-0.493	0.739	
	1	0.734*	0.237	0.012	0.119	1.353	
2	3	0.712*	0.237	0.016	0.096	1.328	
	4	0.858*	0.237	0.002	0.242	1.474	
	1	0.022	0.237	1.000	-0.594	0.6380	
3	2	-0.712*	0.237	0.016	-1.328	-0.096	
	4	0.145	0.237	0.928	-0.470	0.761	
4	1	-0.123	0.237	0.954	-0.074	0.493	
	2	-0.858*	0.237	0.002	-1.474	-0.242	
	3	-0.145	0.237	0.928	0761	0.471	

<sup>\*</sup> Indicates the mean difference is significant at the 0.05 level.

#### 4.3.3 Statistical Significance of M-E PDG Flexible Output

The process used for rigid pavement was repeated for flexible pavement. The following summarizes the pavement performance differences based both on rutting and fatigue cracking. Performance lives can be seen in Table B-10 of Appendix B.

#### 4.3.3.a Performance Life Based on Rutting

Descriptive statistics for the pavement life difference based on rutting for each analyzed data coverage scenario can be seen in Table 4-8.

Table 4-8. Statistical Summary of Difference in the M-E PDG Flexible Performance Life (Rutting) (in yrs) when Using OWPM vs. Continuous Data

			Performance Life Differences							
			Descrip		95% Confidence Interval					
Data type	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Lower	Upper		
OWPM	29	-1.031	0.974	0.181	-3.25	1.17	-1.401	-0.661		
OWPM Using Continuous AADTT	29	-0.782	0.931	0.173	-3.08	1.25	-1.136	-0.428		
OWPM Using Continuous VC5 Single and Tandem Axle Load	29	-1.103	0.885	0.164	-3.25	1.17	-1.440	-0.767		
OWPM Using Continuous VC9 Single and Tandem Axle Load	29	-1.035	0.974	0.181	-3.25	1.17	-1.405	-0.664		

Table 4-8 shows that all traffic characterizations are on the same order as those for rigid pavement, over-predicting the performance life as much as one year with a 95% confidence (p < 0.05). Maximum performance life differences were less than 3.5 years. OWPM using continuous AADTT, however, produces a tighter confidence interval around zero. The results of the paired t-test comparison between OWPM and continuous performance life can be seen in Table 4-9.

Table 4-9. Paired t-test Result for Difference in Performance Life between OWPM and Continuous Based on Rutting for Flexible Payement

		Paired Di	fferences	(in yrs)				
Data type			95% Con Interva Diffe	l of the	t	df	Sig. (2-	
,	Mean	Std. Deviation	Std. Error Mean	Lower	Upper			tailed)
Continuous Performance Rutting Life -OWPM Rutting Performance Life	-1.045	0.977	0.192	-1.440	-0.651	-5.457	25	0.000

Similar to the other distress performances, the OWPM data had overestimated pavement performance by as much as 3.25 years, with a confidence interval from roughly 0.5 to 1.5 years. To determine if any of the OWPM significant traffic element differences was a factor in changing the OWPM performance life significantly, an ANOVA was again conducted on the various scenarios and is shown in Table 4-10.

Table 4-10. One-Way ANOVA Results for Difference in Means Based on Rutting for Flexible Pavement

	Sum of Squares	df	Mean Square	F	Sig.
Between Groups	1.737	3	0.579	0.653	0.583
Within Groups	99.313	112	0.887		
Total	101.050	115			

The insignificance of the ANOVA test indicates that the identified significant differences in the three traffic inputs are not contributing to the observed difference between continuous and OWPM performance life.

#### 4.3.3.b Performance Life Based on Fatigue Cracking

The basic descriptive statistics for the performance life difference between continuous and the aforementioned OWPM data sets can be seen in Table 4-11.

Table 4-11. Statistical Summary of Difference in the M-E PDG Flexible Performance Life (in yrs) Based on Fatigue Cracking when Using OWPM vs. Continuous Data

			]	Performance	Life Diff	erences		
			95% Confidence Interval					
Data type	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Lower	Upper
OWPM	29	-0.630	1.233	0.229	-2.67	2.50	-1.099	-0.161
OWPM Using Continuous AADTT	29	-0.273	1.061	0.197	-2.25	3.25	-0.677	0.1300
OWPM Using Continuous VC5 Single and Tandem Axle Load	29	-0.690	1.015	0.187	-2.58	2.08	-1.076	-0.304
OWPM Using Continuous VC9 Single and Tandem Axle Load	29	-0.627	1.155	0.215	-2.67	2.42	-1.066	-0.188

The descriptive statistics revealed that OWPM data had closer pavement life performance to that of continuous data than those found in the rutting or rigid pavement analysis. The maximum pavement performance life difference was less than approximately 2.7 years, with a maximum confidence interval bound close to 1 year. The paired t-test to determine if OWPM data is statistically significant from continuous data

can be found in Table 4-12. The test determined that the OWPM and continuous performance lives were significantly different from one another.

Table 4-12. Statistical Summary of Difference in the M-E PDG Flexible Performance Life Based on Fatigue Cracking when Using OWPM vs. Continuous Data Type

			Interva	% dence l of the rence	t	df	Sig. (2- tailed)	
	Mean	Std. Dev.	Std. Error Mean	Lower	Upper			
Continuous Performance Rutting Life -OWPM Rutting Performance Life	-0.630	1.233	0.229	-1.099	-0.161	-2.751	28	0.010

The one-way ANOVA test was conducted and shown in Table 4-13 to determine if any of the three traffic input variables (AADTT, single and tandem VC 5 and VC 9 loads) could account for the observed differences seen between OWPM and continuous data.

Table 4-13. One-Way ANOVA Results for Difference in Means Based on Fatigue Cracking for Flexible Pavement

	Sum of Squares	df	Mean Square	F	Sig.
Between	3.138	3	1.046	.835	.477
Groups					
Within	140.311	112	1.253		
Groups					
Total	143.448	115			

As with the rutting distress, variation with the other selected continuous traffic collection schemes did not seem to have an impact on pavement life performance between OWPM and continuous data.

## **4.3.3.c Summary**

The OWPM pavement performance life was both under and over estimated the performance life predicted by continuous data with a 95% CI bound of approximately 1.5 years based on all distresses analyzed. Maximum performance life differences were around 3.33 years. A check to see if the three traffic inputs that exhibited the most variation from continuous data (AADTT, single and tandem VC 5 and VC 9) determined that they were not extensively contributing to the difference in pavement performance life. The only exception to this was the continuous AADTT value for rigid pavement. A 95% CI of less than 1.5 years warrants the use of OWPM data. However, if the data retrieval takes minimal effort, continuous traffic inputs should be used as they are regarded as the most accurate.

## 4.4 TRAFFIC CHARACTERIZATION DEVELOPMENT

The following represents the results of the traffic clustering technique reviewed in Chapter 3, used to characterize Level II inputs for design. Plots of the formed clusters using the hierarchical clustering technique can be found in Appendixes B-F.

Additionally plots of statewide axle load vs. M-E PDG default values can be found in Appendix G for reference. It is important to note that clusters containing two or less sites were removed from the analysis. Having such a small sample size in a cluster is more indicative of a special case condition than a regional Level II traffic pattern.

## 4.4.1 Average Annual Daily Truck Traffic

While a formal hierarchical cluster analysis was not performed on AADTT, the formation of AADTT grouping is reviewed here for completeness as it is incorporated in discriminant analysis. One-way design lane AADTT was divided into 3 groups; low, medium and high to gain an understanding of the variability within this traffic characterization. The details of each group are summarized Table 4-14.

Table 4-14. Established AADTT Levels

AADTT Level	AADTT Value Range	AADTT Designation
Low	0-999	1
Medium	1000-2999	2
High	Above 3000	3

The scatter plot and AADTT clusters revealing the spread of AADTT values within each range can be seen in Figure B1 and Tables B14-B16, respectively, of Appendix B. The low AADTT sites dominate the data, while high AADTT sites are the scarcest.

## 4.4.2 Truck Traffic Classification

Figure 4-1 illustrates three distinct TTC patterns, each distinguished by the percentage VC5 and VC9 trucks. The hierarchical clustering for TTC resulted in the creation of three distinguishable dominant traffic patterns:

- Cluster 1: Dominance of VC9 trucks, with a smaller proportion of VC 5
- Cluster 2: Roughly equal dominance of VC5 and VC9.
- Cluster 3: Dominance of VC5 vehicles, with a lesser proportion of VC9 trucks.

These results are similar to what was observed in literature (2, 10). Sites in cluster 1 were found to be mostly on principal interstates, such as I-96, I-94, and I-69, with one-way AADDT ranging from over 1500 to almost 5500. Cluster 2 contained a majority of sites that were located on north-south routes, such as I-75, US-131, US-127, US-23 and

had AADDT less than 2000. The final cluster, cluster 3, had sites mostly on rural arterials, such as US-2, M-46, M-57 and M-6, generally with AADTT of less than 1000. It was suggested by the MDOT that comparable M-E PDG default TTC groups be found for these cluster averages. The most comparable TTC value was found by determining the least sum of squares between the cluster mean and the default TTC value. The comparable TTC values for cluster 1, cluster 2 and cluster 3 were TTC3, TTC 7 and TTC 15. The graphical comparison is shown in Figure 4-1.

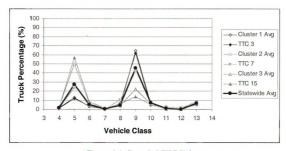


Figure 4-1. Compiled TTC Values

#### 4.4.3 Monthly Distribution Factors

MDFs were established for single unit trailers (VC 4-7), tractor trailer combinations (VC 8-10) and multi trailer combinations (VC 11-13) as these were the default settings in TrafLoad and were recommended for use over individual classes in the literature (7, 13). Figure 4-2 represents the MDF clustering for single unit trailers (VC 4-7). It should be noted that four clusters (6 sites) were excluded after the analyses as they contained two or less sites in each cluster and therefore signify more site-specific patterns rather than any

regional similarity. The three cluster averages shown in Figure 4-2 have distinct patterns. Cluster 1 exhibits little seasonal variability, having MDFs close to 1. Most of these sites were located in the southern Lower Peninsula on a variety of roads with varying functional class and direction. Cluster 2 depicts a general rise in MDFs during the summer with lower values in winter. Major north-south routes, such as I-75, US-131, and US-23 are present in this cluster and most sites are located along the middle region of the Lower Peninsula. Cluster 3 in Figure 8 displays higher MDFs in summer and fall, with much lower MDFs in winter and spring. Sites in this cluster are located in the northern Lower Peninsula and Upper Peninsula with low AADTT.

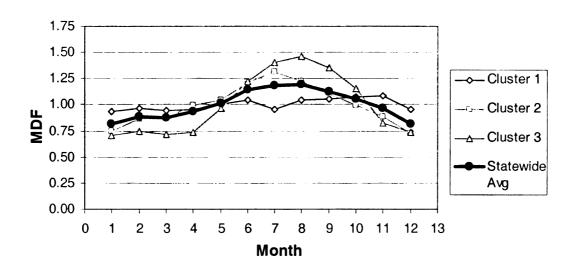


Figure 4-2. Compiled VC 4-7 MDF Values

The VC 8-10 MDFs revealed much less variability than that of VC 4-7 as shown in Figure 4-3. The first cluster produced higher MDFs during the summer months with lower values in the winter. The three sites in this cluster had AADTT less that 300, which probably contributed to its distinct pattern over the other two clusters. The next

two clusters appear to have little MDF variation throughout the year, having values close to one. This suggests that the majority of VC 9 traffic is seasonally independent.

Clustering of VC 11-13 MDFs resulted in twelve clusters. A total of seven clusters, which included eight sites, were removed from the analysis again due to having two or less sites in the cluster. The remaining five cluster averages are shown in Figure 4-4. Cluster 1 and 2, exhibit high summer and low winter VC 11-13 MDFs. These clusters contained sites that were located in the south central Lower Peninsula and Metro Detroit area and had varying functional class and AADTT values. Cluster 4 also showed VC 11-13 MDFs having high summer and low winter values. There were no dominant patterns found within this cluster. Cluster 3 exhibited little seasonal difference and had sites located mainly in the southwestern portion of the Lower Peninsula on major freeways, such as I-94, I-96 and US-131. Cluster 5, had lower spring VC 11-13 MDFs with higher summer and fall values. The three sites in this cluster were all on US-2 in the Upper Peninsula which is a known logging and mineral transport route.

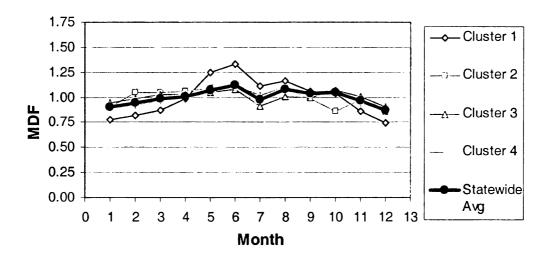


Figure 4-3. Compiled VC 8-10 MDF Values

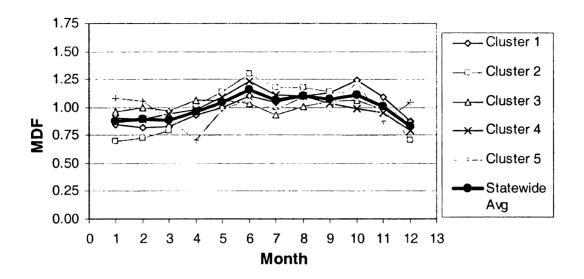


Figure 4-4. Compiled VC 11-13 MDF Values

# **4.4.4 Hourly Distribution Factors**

The cluster analysis resulted in three clusters from the spectrum of HDFs. Average values for these clusters are shown in Figure 4-5. Cluster 1 contains relatively even to heavier evening proportions of trucks at the site. The majority of sites in this cluster are in the lower southern peninsula located on major east-west interstates, such as I-94 and I-69, with one-way AADTTs greater than 1600. Cluster 2 has a higher percentage of trucks than cluster 1, on average of 1-2% each hour between 6:00 am and 5:00 pm. A review of sites in this cluster show that many are on major north-south routes, such as I-75, US-131, and US-127, with another dominant east-west route, I-96, that connects all three. Cluster 3 average has a roughly a 1-3% higher truck percentage between the hours of 6:00 am and 5:00 pm than either clusters 1 and 2. Sites in this cluster are located on principal arterials with lower AADTT. Suggesting that hauls on this road might be more local in nature. The M-E PDG default value, as shown in Figure 4-5, mirrors cluster 1 the most, having a more equal truck volume percentage over the hours of the day.

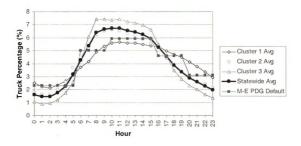


Figure 4-5. Compiled HDF Values

#### 4.4.5 Axle Groups per Vehicle (AGPV)

Cluster analysis of single AGPV yielded five clusters, two of which were single sites. These clusters were removed from the analyses. Figure 4-6 shows the cluster average single AGPV for all VCs for the remaining three clusters as well as the statewide average. Since sites 6019 and 6309 did not have single AGPV values for VC11, they were excluded from the analyses. Including them would have created a large relative distance and would have resulted in the formation of only two clusters based on the clustering algorithm.

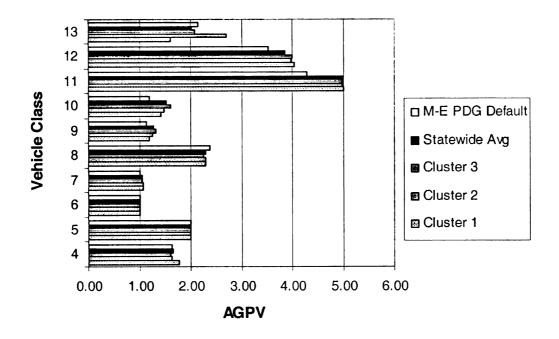


Figure 4-6. Single Axle AGPV Cluster Values

Figure 4-6 reveals that there is a small variation in single AGPV averages between clusters. Little discernible traffic or physical attribute patterns existed for the cluster groups. This suggests that single AGPV is standardized for each VC.

The tandem AGPV cluster averages are presented in Figure 4-7. As with single AGPV, five clusters were formed utilizing the clustering algorithm. However, two clusters were removed, as they contained two or less sites within them, leaving three final clusters.

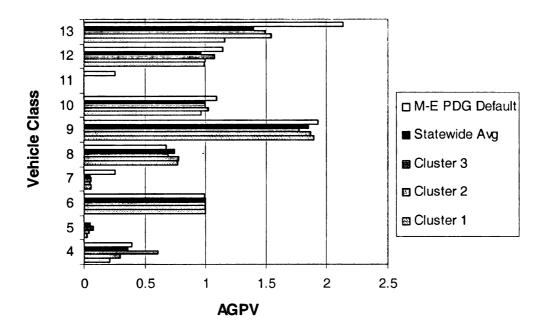


Figure 4-7. Tandem AGPV Cluster Values

Figure 4-7 displays little variation in tandem AGPVs across sites for all VCs, with the exception of VC4. Cluster 1 sites are located predominantly in the Metro region while most sites in cluster 2 were in the west and southwest portions of the state. Cluster 3 sites were in the northern portions of the state and in the U.P. Since VC4 tandem AGPV seemingly is the only discriminating variable, the regional correlation could be to the particular type of buses used within that region. School districts or charter companies could feasibly purchase similar model buses.

The four tridem AGPV clusters can be observed in Figure 4-8. Unlike single and tandem AGPV, the tridem AGPV seems to exhibit more variation between clusters.

Tridem axles are only found on VC 7, VC 10, and VC 13 trucks. The VC 9 values shown in Figure 4-8 could be a result of a semi-tractor trailer combination hauling another smaller trailer behind it, in which the third set of axles after the trailer tandem causes the sensor to register a tridem configuration. A review of site attributes within each cluster

did not reveal any patterns that could serve to account for the differences in variation between clusters. However, since cluster 3 has only three sites, the high tridem AGPV observed could be the result of highly site-specific characteristics.

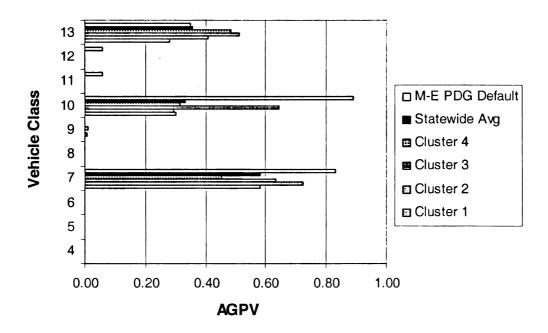


Figure 4-8. Tridem AGPV Cluster Values

Clustering of quad AGPV resulted in six clusters. This was reduced to five as one cluster had just two sites. The five cluster averages for quad AGPV for all vehicle classes is displayed in Figure 4-9.

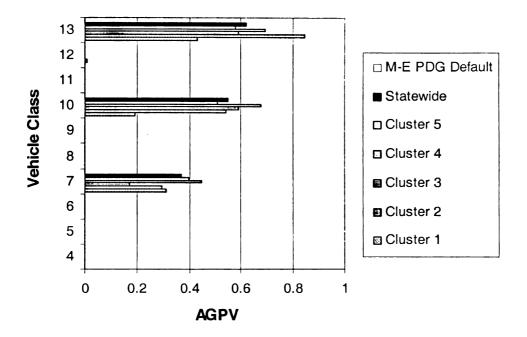


Figure 4-9. Quad AGPV Cluster Values

From Figure 4-9, there seems to be distinct differences in quad AGPV values across clusters. Cluster 1 has lower quad AGPV than the other sites while cluster 2 and cluster 4 seem to have the highest. Again, preliminary analysis showed little distinguishable attributes within the clusters formed.

# **4.4.6** Single Axle Load Spectra

The overall single axle load spectra and related clusters are presented Figure 4-10.

Three clusters were formed and are directly related to the two peaks observed in the data.

The first peak occurs at approximately 4 to 7 kips while the second peak ranges from 9-14 kips. A review of the individual single axles for all VCs at all sites revealed the following:

 VC5 single axles are maximum at the 4-7 kip range, whereas singles axles from other VCs typically have low proportions at this range.

- All remaining VC single axle load spectra peak at the 9-14 kip range with the exception of VC7, which contributes little to the traffic stream.
- Single axle load spectra across all sites displayed similar shaped distributions within the same VC.

These observations suggest that the axle load spectra is not influenced so much by the shape of the axle load spectra itself but instead the actual distribution of the truck traffic, particularly the presence of VC 5. Cluster 1 has a higher proportion of axles in the 9-14 kip range than the 4-7 kip range. A review of sites in this cluster show a dominance of VC 9 truck traffic, having roughly 30% or more traffic than that of VC 5. Cluster 2, has a more even proportion of 9-14 kip axles and 4-7 kip axles. Sites in this cluster had a more even proportion of VC 5 and VC 9 trucks having a distribution difference of less than 30% between the two. Cluster 3 shown in Figure 3 reveals a much higher proportion of 4-7 kip axles than that of 9-14 kips. This cluster had sites with a higher VC 5 percentage than VC 9 for nearly all cases. Because single axles seem to be dependent on the VC distribution rather than the shape of the axle load spectra, using a statewide axle load spectra within all vehicle classes for single axles could be acceptable from a practical standpoint.

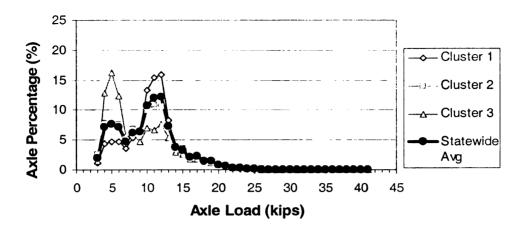


Figure 4-10. Cluster Averages for All Single Axle Load Spectra

# 4.4.7 Tandem Axle Load Spectra

The overall tandem axle load spectra clusters can be seen in Figure 4-11. Four clusters resulted from the data. It was determine graphically that Cluster 4 had two seemingly distinct axle loading patterns. Consequently, this cluster was divided into two to form a total of five clusters. Clusters 1-3 were shown to have more light axles than heavy, whereas Clusters 4 and Cluster 5 are more even to heavy in nature. The two peaks seem to correspond to unloaded (9-14 kips) and loaded (30-35 kips). Clusters 1-3 consist of mostly secondary arterials and rural freeways scattered throughout the state. All sites have AADTT less than 2000. Nearly all sites in cluster 4 are located on major east-west routes, I-94, I-96 and I-69 in the southern Lower Peninsula and have AADTT ranging from above 1600 to almost 5500. Cluster 5 had no dominant traffic patterns.

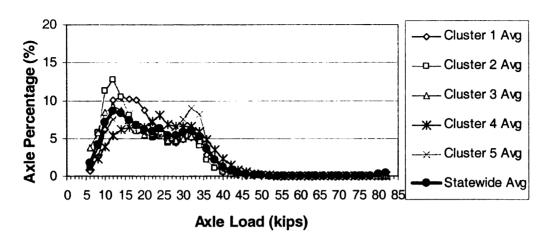


Figure 4-11. Cluster Averages for All Tandem Axle Load Spectra

# 4.4.8 Tridem Axle Load Spectra

A total of five tridem axle load spectra clusters were created using the clustering algorithm. Two clusters were excluded from the analysis as they contained only one site. The three remaining clusters can be seen in Figure 4-12. The general trend of the tridem axle clusters appears to be a large proportion of light axles around 12 kips followed by a smaller peak value around 40-45 kips. Sites found in the first cluster had higher AADTT on average and were primarily located in the southern Lower Peninsula on principal arterials or interstates. Sites contained in cluster 2 were also mainly on principal arterials scattered across the state that had AADTT ranging from 2200 to 300. Finally, cluster 3 sites were on secondary arterials and freeways with relatively low AADTT, mostly under 1000.

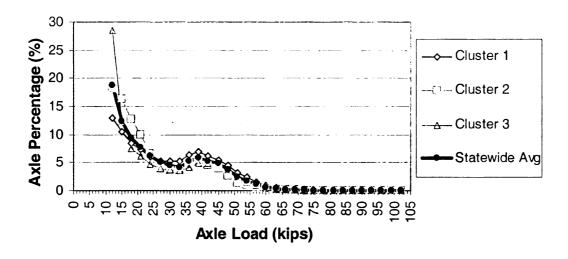


Figure 4-12. Cluster Averages for All Tridem Axle Load Spectra

# 4.4.9 Quad Axle Load Spectra

The overall quad axle load spectra can be seen in Figure 4-13. A total of six clusters were formed. However, two clusters were removed for having two or less sites and two clusters were combined to form cluster three due to a similar loading distribution. Peak values for the quad axle load spectra occur at the 15-20 kip, 50-60 kip and the 104 kip range. Perhaps the most significant finding in the analysis of overall quad axles is the presence of the 104 kip load. Having such a high loading on one quad axle, double the allowed weight of 52 kips as shown in Table 3-5, at all sites suggests is most likely due to the TrafLoad processing itself is erroneous. A truck having two successive quads in a raw data file is seemingly being combined into one axle in TrafLoad. Consequently, the quad axle loads developed in this report will be inherently erroneous. However, relative sensitivity analyses performed with quad axle loads can still yield productive results.

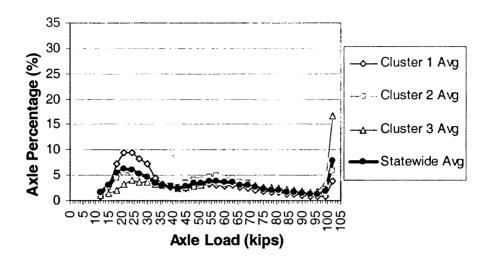


Figure 4-13. Cluster Averages for All Quad Axle Load Spectra

Most of the sites contained in cluster 1 are in the Bay or University regions on roads having an AADTT of less than 2000. Dominant characteristics could not be established for cluster 2. Cluster 3 contained sites in the Metro, Southwest and Superior regions.

# 4.5 IMPACT OF TRAFFIC CHARACTERIZATIONS IN THE M-E PDG

Comparison of the various traffic characterizations in the M-E PDG allows for the determination of which traffic characterization (Level II or Level III) for a particular traffic input is appropriate, at a minimum, for design when Level I is unavailable. Level, I, when available, should be used wherever possible as it is regarded as the actual traffic of the site. If it is found that the predicted pavement performance is insensitive to a particular traffic input, statewide or M-E PDG default values could be used (Level III). Should this be the case, however, it will be recommended that statewide values be used as they are more representative of the state than national data. If a predicted performance was found to be sensitive to a particular traffic input, then there may be a need to develop Level II inputs at a minimum. This section assesses the performance of the various

traffic characterizations for both rigid and flexible pavements. The basic procedure for the rigid analysis was to establish the continuous (site-specific) predicted performance life for each site, which was already performed in the OWPM-continuous comparison. Subsequently, for each traffic parameter, the site specific value was being replaced with the following:

- Statewide average (Level III)
- Cluster average (Level II)
- M-E PDG default (Level III)

The M-E PDG program was run for each adjusted traffic characterization and the predicted performance life based on the threshold values was recorded. This process was adopted for all traffic inputs. The resulting pavement life difference was calculated by subtracting the traffic characterization value from the site-specific continuous value. As with the OWPM-continuous comparison, positive pavement life differences indicated that the pavement life was being under predicted while negative values indicated an over prediction in pavement life.

Once the pavement life performances were compiled, statistical analyses of the data was conducted. For each traffic input, descriptive statistics were calculated for summary of the data. An ANOVA (*p*-value < 0.05 for 95% confidence, 2-tailed test) was then used to determine if there was any effect of using a specific traffic characterization over another. If the ANOVA was significant, Tukey's contrast was used to determine the specific interactions between traffic characterizations. The results of these analyses, led to the recommendation of the appropriate minimum traffic characterization, Level II or Level III, which is needed when Level I data is unavailable. While there were multiple

statistics performed to gain understanding of the data, the most critical were the 95% CI and the minimum and maximum values, as they gave a true indication of the practical variability in the data. Table 4-15 reviews the criteria used to determine the impact (sensitivity) of the difference between traffic characterizations and correspondingly select the proper level needed for design.

Table 4-15. Impact Designation for the M-E PDG Results

Designation of Impact	95% CI Bound (Years)	Minimum or Maximum Bound (Years)
Significant	CI Bound > 1	MM Bound > 5
Moderate	½ < CI Bound < 1	2 < MM Bound < 5
Negligible	CI Bound < 1/2	MMBound < 2

The designations were not only used to measure each traffic characterizations performance against site-specific values, but also to determine the impact between traffic characterizations. If implementation of a traffic characterization led to an improvement in the designation as compared to another, that particular traffic characterization was recommended. If the impacts of all traffic characterizations analyzed were similar, then Level III data (lowest and easiest to input) was recommended. All recorded performance lives can be seen in Tables B-7 to B-13 of Appendix B.

# **4.5.1** Rigid Pavement Analyses

## 4.5.1.a Truck Traffic Classification

Table 4-16 summarizes the descriptive statistics for the predicted performance life values based on 10% slabs cracked for each TTC hierarchical traffic characterization as well as the results of the ANOVA.

Table 4-16. Descriptive Statistics and ANOVA Results for TTC Hierarchical Characterization Performance Life Differences in Rigid Pavement

			Basic	Statistic	:s		95 Confi Inte	ANOVA	
Data level	N	Mean	Std. Dev	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Lowe r	Upper	Test
Statewide TTC	36	-0.17	3.09	0.51	-5.67	6.67	-1.22	0.87	
Cluster Average TTC	36	0.04	1.99	0.33	-4.67	4.75	-0.63	0.72	Not Sig (p=0.92)
M-E PDG Comparable Cluster TTC Values	36	-0.16	2.64	0.44	-6.83	5.33	-1.06	0.73	(p=0.92)

The results of the ANOVA analysis suggest that while TTC does impact performance, the three traffic characterizations are not significantly different from one another. Since the 95% confidence intervals overlap, the TTC characterizations do not produce a noticeable statistical difference in rigid pavement design life between one another. These observations suggest statewide values could be used. However, the cluster averages produce a maximum under and over prediction of at least one year than the other hierarchical traffic characterizations. Additionally, the CI for the cluster TTC is at least half a year closer to Level I data than the other hierarchical levels. Accordingly cluster TTC values should be used for better pavement performance results.

#### 4.5.1.b Monthly Distribution Factor

The descriptive statistics and ANOVA analysis for the MDF traffic characterizations can be found in Table 4-17.

Table 4-17. Descriptive Statistics and ANOVA Results for MDF Hierarchical Characterization Performance Life Differences in Rigid Pavement

			Basic	Statistic		95 Confi Inte	dence	ANOVA	
				Std. Error			Test		
		Mea	Std.	Mea	Life	Life	Lowe		
Data level	N	n	Dev.	n	Diff.	Diff.	r	Upper	
Statewide MDF	3 6	0.16	0.44	0.07	- 0.83	1.08	0.01	0.31	
Cluster Average MDF	3 6	0.03	0.27	0.05	- 1.75	0.17	-0.06	0.12	Sig. ( <i>p</i> =0.00)
M-E PDG Default MDF	3 6	-0.53	0.45	0.07	- 0.75	0.67	-0.68	-0.38	

From Table 4-13, the 95% confidence intervals for each traffic characterization are less than one-year. The maximum observed difference in performance life from site-specific data was only an over-prediction in performance of only 1.75 years. This observation suggests that MDFs have a negligible effect on M-E PDG performance. While the ANOVA test proved to be significant, it was assumed that performance life differences across traffic characterization of less than a year were negligible from a practical perspective. Consequently, statewide MDFs could be used for rigid pavement design.

## 4.5.1.c Hourly Distribution Factor

Table 4-18 displays the performance life difference descriptive statistics for the various HDF traffic characterizations.

Table 4-18. Descriptive Statistics and ANOVA Results for HDF Hierarchical Characterization Performance Life Differences in Rigid Pavement

			Basic	Statistic		95 Confi Inte	dence	ANOVA	
		Std. Perf. Perf.							Test
			Std.	Error	Life	Life			
Data level	N	Mean	Dev.	Mean	Diff.	Diff.	Lower	Upper	
Statewide					-				
HDF	36	-0.68	4.15	0.69	10.08	6.83	-2.08	0.73	
Cluster									
Average		_				_			Sig. ( <i>p</i> =0.00)
HDF	36	-0.2	2.11	0.35	-5.42	3	-0.92	0.51	(p=0.00)
M-E PDG									
Default									
HDF	36	3.79	3.39	0.57	-3.58	11	2.64	4.94	

Unlike MDFs, the HDFs seem to have a much more significant impact on predicted pavement performance. The M-E PDG default and statewide averages for HDF exhibit under and over predictions of up to 11 years. While this is suggestive of an outlier, the next worse case seen in the data was around 9 to 10 years within both traffic characterizations. The M-E PDG produced the worst results, having a CI roughly between 2.5 and 5 years under predicting performance. This was confirmed statistically by Tukey's contrast. The cluster averages produced the least predicted performance difference from site-specific values. This input had a confidence interval within one-year of site-specific values with maximum performance life differences just under 5.5 years. Statewide HDF values produced CIs that exceeded at least two years either over or under predicting performance. It was not anticipated that HDF would have this much of an effect on pavement performance due to the effect of slab curling. It might be possible that this model needs to be calibrated. However, since cluster averages produced a

minimum CI bound that is one year less than statewide averages, the cluster averages should be implemented in design.

# 4.5.1.d Axle Groups per Vehicle

Descriptive statistics and the results for the AGPV hierarchical traffic characterizations can be found in Table 4-19.

Table 4-19. Descriptive Statistics and ANOVA Results for HDF Hierarchical Characterization Performance Life Differences in Rigid Pavement

							95 Confi		
			Basic	Statistic	s			rval	ANOVA
				_	Min	Max			Test
			C+7	Std.	Perf.	Perf.			
Data level	NT.	Moor	Std.	Error	Life	Life	T	I Imma:	
	N	Mean	Dev.	Mean	Diff.	Diff.	Lower	Upper	
Statewide Average AGPV	36	-0.01	0.5	0.08	-1	1.08	-0.18	0.16	
Cluster	-								
Average AGPV	36	0.04	0.24	0.04	-0.67	0.58	-0.04	0.12	Not Sig. ( <i>p</i> =0.91)
M-E PDG Default AGPV	36	0.06	0.91	0.15	-1.67	2.08	-0.25	0.36	

Table 4-19 indicates that the hierarchical AGPV inputs have a slight impact on predicted performance life. The ANOVA test shows that performance life differences between the AGPV hierarchical traffic characterizations are not statistically different from one another. M-E PDG AGPV default values produced the greatest difference in predicted performance, having maximum under and over prediction values of close to two years. However, the 95% CI for all traffic characterizations are within half a year from site specific data and both the AGPV cluster and statewide averages have maximum

performance life differences of approximately one year or less. These observations suggest that statewide AGPV averages could be used for rigid design purposes.

#### 4.5.1.e Single Axle Load Spectra

The performance life difference descriptive statistics and ANOVA analysis result for the developed single axle load characterizations are displayed in Table 4-20.

Table 4-20. Descriptive Statistics and ANOVA Results for Single Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement

			Basic	Statistic		Confi	dence rval	ANOVA	
Data level	N	Mean	Std. Dev	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Lower	Upper	Test
Statewide Single Axle Loads	36	0.14	1.25	0.21	-3.92	3.17	-0.29	0.56	
Cluster Average Single Axle Loads	36	0.09	1.39	0.23	-4.08	4.17	-0.38	0.56	Not Sig. (p=0.24)
M-E PDG Default Single Axle Loads	36	0.73	2.45	0.41	-3.83	8.17	-0.1	1.56	

Table 4-20 reveals that single axle load spectra has a moderate impact on predicted pavement performance. Maximum under and over prediction values were around four years, with M-E PDG default values producing an under prediction exceeding eight years for two sites (site 9759 and site 8440). Yet again M-E PDG default values exhibit the most variation having a performance life difference sample standard deviation nearly twice that of cluster or statewide averages. The 95% CI also seems to under predict more heavily than the other traffic characterizations, having an interval from nearly zero to

around 1.5 years. Statewide and cluster averages seem nearly identical in terms of minimum and maximum performance prediction (maximum four year) along with 95% CI. Values for these were approximately 4 years, 1.25 years and bounds of 0.5 years respectively. It should be noted that only seven sites exceeded one year of site specific values. It was unclear as to what was the cause of these more extreme cases. The one-way ANOVA test, however, did not find a statistical significance between the single axle load traffic characterizations. Since the statewide and cluster average traffic characterizations produced similar results, the statewide average single axle loads could be used.

# 4.5.1.f Tandem Axle Load Spectra

The descriptive statistics and ANOVA result for tandem axle load traffic characterizations can be seen in Table 4-21.

Table 4-21. Descriptive Statistics and ANOVA Results for Tandem Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement

			Basic	Statistics	<b>.</b>		95 Confi Inte	ANOV	
				Std.	Max Perf.			A Test	
Data level	N	Mean	Std. Dev.	Error Mean	Life Diff.	Life Diff.	Low.	Upp.	
Statewide Tandem Axle Loads	36	0.68	4.75	0.79	-13	9.33	-0.93	2.28	
Cluster Average Tandem Axle Loads	36	0.14	3.57	0.6	13.2 5	8.58	-1.07	1.35	Sig. ( <i>p</i> =0.00)
M-E PDG Default Tandem Axle Loads	36	4.9	4.8	0.8	11.0 8	12.4 2	3.27	6.52	

Originally, it was found that all traffic characterizations produced maximum under or over performance life prediction values in excess of 10 years, which is half the design life. A subsequent outlier analysis was performed on the data to determine the extreme observations that were seen in the data. Four sites were identified, consisting of site 9189 (I-275@Penn), site 8049 (Fowlerville), site 7159 (Battle Creek) and site 7029 (Grass Lake). Site 7029 is actually responsible for all high over prediction (negative) values. A review of this site indicated that some slight calibration drift existed. This is most likely is responsible for the extreme pavement performance life differences and is most likely an outlier due to the next over prediction value being approximately six years. In analyzing the under prediction (positive) values, at least seven sites had values greater than nine years. The substantial number with this high of variation seems to indicate that the effect is from the hierarchical characterizations themselves rather than extreme and potentially erroneous observations from a few specific sites.

The M-E PDG default values produce inferior results having a mean and sample standard deviation pavement performance life difference of almost five years. The confidence interval for this traffic characterization ranges from three to almost seven years. The statewide and cluster average pavement life performance prediction have means and confidence intervals much closer to zero. However, the cluster average seems to produce the most comparable results to that of site specific, having a confidence interval within 1.5 years of zero. Cluster averages also have a CI under prediction value one year less than statewide values. Consequently they should be implemented in rigid pavement design.

## 4.5.1.g Tridem Axle Load Spectra

Table 4-22 reveals the performance life difference descriptive statistic summary and ANOVA result for the tridem axle load distribution hierarchical traffic characterizations.

Table 4-22. Descriptive Statistics and ANOVA Results for Tridem Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Pavement

			Basic	Statistics			Confi	5% dence rval	ANOVA
			G: 1	Std.	Max Perf.			Test	
Data level	N	Mean	Std. Dev.	Error Mean	Life Diff.	Life Diff.	Low.	Upp.	
Statewide Tridem Axle Loads	36	0.004	0.039	0.007	17	0.08	009	.017	
Cluster Average Tridem Axle Loads	34	0.005	0.027	0.005	08	0.08	005	.014	Sig. ( <i>p</i> =0.04)
M-E PDG Default Tridem Axle Loads	36	0.116	0.357	0.06	25	1.83	005	.236	

Table 4-22 reveals that tridem axle load characterizations have an insignificant impact on predicted pavement life performance. The mean, confidence interval, standard deviation and minimum and maximum performance life difference are all between one and three *months*. The only exception to this was the M-E PDG default values, in which two sites had predicted performance difference values in excess of one-year. Such a low difference could be attributed to tridem axles contributing a relatively small proportion of overall loading on the pavement. The ANOVA test revealed that at least one of the traffic characterizations was significant from one another. Tukey's contrast was conducted to identify if indeed the M-E PDG default was statistically different. The test

contradicted the ANOVA result, however, finding that there were not any statistically significant differences amongst the traffic characterizations. The confidence interval bands being within one to three months for all traffic characterizations, suggest that statewide averages could be used for this traffic input.

#### 4.5.1.h Quad Axle Load Spectra

Summary statistics for the quad axle load spectra characterization predicted pavement performance difference can be seen in Table 4-23.

Table 4-23. Descriptive Statistics and ANOVA Results for Quad Axle Load Distribution Hierarchical Characterization Performance Life Differences in Rigid Payement

			Basic	Statistic	95 Confi Inte	ANOVA			
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Lower	Upper	Test
Statewide Quad Axle Loads	36	0.002	0.013	0.002	0	0.08	-0.002	0.007	
Cluster Average Quad Axle Loads	33	0	0	0	0	0	0	0	Not Sig. (p=0.86)
M-E PDG Default Quad Axle Loads	36	0.002	0.03	0.005	-0.08	0.08	-0.008	0.012	

Similar to developed tridem axle load spectra characterizations, the quad axle load spectra characterizations seem to have little impact on predicted pavement performance life. All characterizations have 95% CIs and maximum under and over predicted performance life values of less than a month. This is most likely due to quad axles contributing to such a small amount of the overall loadings experienced by the pavement.

The ANOVA analysis verified that there was not a significant difference between traffic characterizations for quad axle load spectra. Since all traffic characterizations produce the same negligible differences in predicted pavement performance difference a statewide average can be used for this input.

# 4.5.2 Flexible Pavement Analysis

Following the rigid analyses, the flexible runs were conducted. Since the flexible runs take a substantially longer time period than rigid pavement to process the rutting and fatigue cracking outputs, up to 15 times longer for some cases, care was taken to efficiently perform runs. From the rigid analysis, it was seen that in nearly every case, the M-E PDG default traffic input produced either the most varying prediction life or had the most substantial average pavement life difference from site-specific values.

Therefore, it was decided to exclude the M-E PDG default values in flexible pavement design runs.

As previously stated, rutting and fatigue cracking were shown to be impacted by the various traffic characterizations and are accordingly assessed for the flexible runs. To measure the impact that the traffic characterizations had on these distresses and subsequently pavement performance life, the following was conducted:

- Descriptive statistics to summarize the data
- Paired *t*-test between statewide average performance life difference and cluster average performance life difference

Unless there is a strong reason not to, the traffic characterizations suggested for use in rigid design will be recommended for flexible to maintain consistency in the design procedure.

#### 4.5.2.a Truck Traffic Classification

The descriptive statistics for the TTC characterizations' pavement life difference performance based on rutting and fatigue cracking can be found in Table 4-24.

Table 4-24. Pavement Life Difference Descriptive Statistics and *t*-test Based on Rutting and Fatigue Cracking for TTC Characterizations

		G	roup Sta	tistics (R	Lutting)		95 Confi Inte	dence	
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp.	<i>t</i> -test
Statewide Average TTC	31	0.665	2.713	0.487	-2.67	11.42	-0.33	1.661	Not Sig.
Cluster Average TTC	31	0.535	2.6	0.467	-3.08	10.25	-0.419	1.488	(p=0.50)
			Group	Statistics	s (Fatigue	e Crackin	g)		
Statewide Average TTC	31	0.434	1.934	0.347	-1.83	6.33	-0.276	1.143	Not Sig.
Cluster Average TTC	31	0.304	1.681	0.302	-2.33	5.67	-0.313	0.92	(p=0.57)

When compared to rigid pavement, the flexible pavement life difference for the TTC characterizations was found to be slightly less variable, with the exception of site 9759 (Cutlerville). This sight was responsible for the minimum and maximum pavement performance life differences of approximately 11.5 and 10.25 years for statewide and cluster averages. The next maximum value was roughly five years, suggesting that Site 9759 is most likely an outlier. The standard deviation of the data approached almost

three years for both TTC traffic characterizations, with confidence interval bounds of approximately 1.5 years or less. The paired *t*-test to determine if the differences in traffic characterizations were statistically significant is shown in Table 4-24. This lack of significance in the paired *t*-test supports this observation.

While not as pronounced as rutting performance life difference, the predicted performance life difference values based on fatigue cracking exhibited a maximum underestimation of pavement life around six years for both traffic characterization. The 95% CIs were similar having an over estimation of pavement life performance of less than half a year and an under estimation of pavement performance of approximately one-year. The lack of significance from the paired *t*-test again supports these observations. Accordingly, Level III TTC data should be used in flexible design. Despite the lack of improvement between statewide average values and cluster averages, however, it is recommended that cluster averages be used for consistency with rigid pavement design.

# 4.5.2.b Monthly Distribution Factor

The descriptive statistics for the pavement life difference based on rutting and fatigue cracking for the two analyzed MDF traffic characterizations is contained in Table 4-25.

Table 4-25. Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for MDF Characterizations

		G	roup Sta	tistics (R	utting)		95 Confi Inte	dence	
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp.	<i>t</i> -test
Statewide Average MDF	31	0.035	0.47	0.084	-0.917	0.917	-0.138	0.207	Not Sig.
Cluster Average MDF	31	0.027	0.227	0.041	-0.75	0.667	-0.056	0.11	(p=0.92)
			Group	Statistics	(Fatigue	Crackin	g)		
Statewide Average MDF	31	0.148	0.444	0.08	-0.583	1.917	-0.015	0.311	Sig.
Cluster Average MDF	31	0.051	0.336	0.06	-0.417	1.667	-0.072	0.174	(p=0.05)

Table 4-25 reveals that similar to rigid pavement, MDF traffic characterizations do not have a significant impact on predicted pavement performance life for either distress. Both statewide and cluster averages have a maximum of two year's difference in pavement life from site-specific values. Additionally, both have 95% CIs for predicted pavement performance life difference of less than three months indicating very little variation across sites. The *t*-test for rutting was found to not be significant while fatigue cracking revealed a statistical difference between the two traffic characterizations. However, these differences can be measured in months and as such are practically insignificant. Consequently, statewide MDFs can be used for flexible pavement design.

# 4.5.2.c Hourly Distribution Factor

The pavement performance life difference was completely unaffected by the HDF traffic characterizations placed in the M-E PDG, unlike rigid pavement. This was true for both rutting and fatigue cracking. Consequently, descriptive statistics and a t-test are not applicable here. The lack of variability in the flexible design yet significant variability in the rigid design further supports that the HDF model might need to be modified. Since this is an extreme contrast to rigid pavement, it is recommended that statewide values for HDF be used for flexible pavement analyses.

# 4.5.2.d Axle Groups Per Vehicle

The descriptive statistics for the pavement life differences produced for the AGPV traffic characterizations can be seen in Table 4-26.

Table 4-26. Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for AGPV Characterizations

			_					dence	
		Gr	oup Sta	tistics (R	utting)		Inte	rval	
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp.	<i>t</i> -test
Statewide Average AGPV	31	-0.032	0.554	0.1	-1	1.083	-0.235	0.172	Not Sig.
Cluster Average AGPV	31	-0.041	0.404	0.073	-0.833	0.917	-0.189	0.108	(p=0.93)
			Group	Statistics	(Fatigue	Crackin	g)		
Statewide Average AGPV	31	-0.034	0.334	0.06	-0.833	0.917	-0.156	0.089	Not Sig.
Cluster Average AGPV	31	0.005	0.185	0.033	-0.583	0.333	-0.062	0.073	(p=0.47)

Table 4-26 reveals that AGPV has negligible impact on flexible pavement design life based on rutting or fatigue cracking. The maximum difference attained at any individual site for either traffic characterization was approximately one year. The 95% confidence intervals for pavement performance life difference for both sets of traffic characterizations were within two months of zero for both distresses. The similarity in results is substantiated by a lack of significance in the *t*-tests for both distresses.

Accordingly, statewide averages could be used for this traffic characterization.

### 4.5.2.e Single Axle Load Spectra

The descriptive statistics for pavement performance life difference based on rutting for the single axle load spectra characterizations can be found in Table 4-27. From Table 4-27, it appears that there is little variation in predicted pavement performance life difference between cluster and statewide single axle load traffic characterizations. Both have maximum under and over pavement performance life differences of one and two years, respectively, for rutting distress and two and three years for fatigue cracking. Additionally 95% CIs are within half a year of zero for both characterizations. The paired *t*-test performed on these two sets of data for both distresses also concluded that the two traffic characterizations do not produce pavement performance life difference values that are statistically different from one another. These findings suggest that statewide average single axle loadings could be used for this traffic characteristic.

Table 4-27. Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for Single Axle Load Distribution Characterizations

		Gro	oup Stat	istics (R	95% Confidence Interval				
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp.	t-test
Statewide Average Single Axle Loads	31	-0.137	0.674	0.121	-2	1	-0.385	0.11	Not Sig.
Cluster Average Single Axle Loads	31	-0.121	0.682	0.122	-2.083	1.167	-0.371	0.129	(p=0.574)
			Group	Statistic	s (Fatigu	e Crack	ing)		
Statewide Average Single Axle Loads	31	-0.045	1.037	0.186	-2.833	<b>1</b> .917	-0.426	0.335	Not Sig.
Cluster Average Single Axle Loads	31	-0.064	1.021	0.183	-2.833	1.833	-0.439	0.31	Not Sig. (p=0.751)

#### 4.5.2.f Tandem Axle Load Spectra

Summary statistics and the *t*-test results for the pavement performance life difference based on rutting and fatigue cracking for tandem axle load spectra traffic characterization is contained in Table 4-28.

Table 4-28. Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for Tandem Axle Load Distribution Characterizations

		Gı	oup Sta	tistics (R	utting)			% dence rval	
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp.	t-test
Statewide Average Tandem Axle Loads	31	0.18	1.134	0.204	-2.25	3	-0.236	0.596	Not Sig.
Cluster Average Tandem Axle Loads	31	-0.043	0.819	0.147	-2.25	1.917	-0.344	0.257	(p=0.12)
			Group	Statistics	(Fatigue	Crackir	ng)		
Statewide Average Tandem Axle Loads	31	0.575	1.253	0.225	-1.917	3.917	0.116	1.035	Not Sig.
Cluster Average Tandem Axle Loads	31	0.215	1.032	0.185	-2	3.417	-0.163	0.594	(p=0.16)

The effect of the tandem axle load spectra traffic characterization based on rutting pavement life performance difference is much less pronounced than that for percent slabs cracked in rigid pavement. Unlike maximum pavement life performance differences of over 13 years in rigid pavement, maximum pavement performance life differences in flexible pavement based are only three and four years based on rutting and fatigue

cracking, respectively. The *t*-test to compare the two traffic characterizations' pavement performance life differences based on either distress revealed that the differences were not statistically significant. However, it does appear that the cluster average for tandem axle load spectra yields predicted performance 95% CI bounds almost half a year less than the statewide values. Accordingly, similar to rigid design, cluster averages should be used for flexible pavement design.

# 4.5.2.g Tridem Axle Load Spectra

The descriptive statistics for the pavement performance life difference based on rutting and fatigue cracking for tridem axle load spectra traffic characterizations are shown in Table 4-29.

Table 4-29 suggests that the predicted performance life based on rutting and fatigue cracking is relatively unaffected by the changes in tridem axle loading spectra from the developed traffic characterizations. The maximum difference in pavement life performance for either traffic characterization using either distress is only a third of a year. Standard deviations are a month or less for both as well. The 95% CI for predicted pavement performance is actually a maximum of two weeks within site specific values for both traffic characterizations. These observations suggest that the two tridem axle load distribution traffic characterizations exhibit similar performance. This is supported by a *t*-test result of not significant for fatigue cracking while it is contradicted by a significant result for rutting. Despite the statistical differences, from a practical perspective, a difference of weeks in performance is negligible. Consequently statewide tridem axle load values could be used for flexible pavement design.

Table 4-29. Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for Tridem Axle Load Distribution Characterizations

		G	roup Sta	tistics (R	utting)		Confi	dence rval	
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp.	t-test
Statewide Average Tridem Axle Loads	3	0.021	0.068	0.012	-0.167	0.167	-0.004	0.046	Not Sig.
Cluster Average Tridem Axle Loads	3 0	0.022	0.084	0.015	-0.083	0.333	-0.009	0.054	(p=0.009)
			Group	Statistic	s (Fatigu	e Cracki	ng)		
Statewide Average Tridem Axle Loads	3	0.036	0.111	0.02	-0.167	0.5	-0.004	0.077	Sig.
Cluster Average Tridem Axle Loads	2 9	0.011	0.076	0.014	-0.167	0.167	-0.017	0.04	Sig. (p=0.393)

#### 4.5.2.h Quad Axle Load Spectra

The summary statistics and t-test results for the pavement performance life difference based on rutting and fatigue cracking for the quad axle load spectra traffic

characterization can be seen in Table 4-30.

Table 4-30. Pavement Life Difference Descriptive Statistics and t-test Based on Rutting and Fatigue Cracking for Tridem Axle Load Distribution Characterizations

		Gı	oup Stat	95% Confidence Interval					
Data level	N	Mean	Std. Dev.	Std. Error Mean	Min Perf. Life Diff.	Max Perf. Life Diff.	Low.	Upp	t-test
Statewide Average Quad Axle Loads	31	0.118	1.824	0.328	-2.75	4.083	-0.551	0.787	Not Sig.
Cluster Average Quad Axle Loads	29	-0.114	1.347	0.25	-2.333	3.25	-0.627	0.398	(p=0.86)
			Group	Statistics	(Fatigue	Crackin	ng)		
Statewide Average Quad Axle Loads	31	0.121	0.692	0.124	-1.083	2	-0.133	0.375	Sig.
Cluster Average Quad Axle Loads	28	-0.054	0.504	0.095	-0.833	0.917	-0.249	0.142	(p=0.26)

Unlike tridem axle load spectra, the quad axle load characterizations seem to have a moderate impact on the predicted pavement performance life. The maximum pavement performance life prediction was 4 years and 2 years using statewide quad axle loadings for rutting and fatigue distresses, respectively. These findings suggest that the rutting is highly sensitive to overall applied load. The heavy (erroneous) loading could be

exacerbating this effect. From Table 4-30, it seems that cluster average quad axle load spectra values have lower maximum performance life difference values of approximately one year, although 95% CIs are all within a half a year of zero for both distresses.

Additionally *t*-tests for both distresses revealed that the differences in predicted pavement performance life was not statistically significant. These results suggest that statewide quad axle load distributions can be used for flexible pavement design.

## **4.5.2.i** Summary

Comparisons in the M-E PDG predicted performance life differences between site-specific data and the developed traffic characterizations yielded information on the impact of the traffic input on performance. This led to the selection of the appropriate traffic characterization for each traffic input. The following summarizes the results found in this section. All traffic characterizations not presented here can be found in Appendix H.

moderately affects flexible pavement performance. With the exception of cluster averages or rigid pavement, the traffic characterizations had 95% CIs greater than 1 year and maximum performance life differences in excess of 5 years. Since TTC cluster averages for rigid pavement produced a CI bound half a year less than the other two characterizations and had maximum values under 5 years, TTC clusters were suggested for use in rigid design. Although there was no observable difference in impact between cluster averages and statewide values, TTC cluster averages are also recommended for flexible design for consistency. The classification cluster averages are shown in Table 4-31.

**Table 4-31. Cluster TTC Averages** 

	Cluster 1	Cluster 2	Cluster 3
4	1.66	1.68	2.08
5	13.01	27.35	49.78
6	3.27	5.57	6.62
7	0.33	0.95	1.09
8	3.86	4.93	4.27
9	64.35	42.39	22.08
10	6.42	7.90	6.43
11	1.59	1.11	0.41
12	0.41	0.17	0.04
13	5.11	7.95	7.20

MDFs had a negligible impact on predicted rigid and flexible pavement
performance. The developed MDF traffic characterizations collectively produced
a maximum of 2 years difference in pavement life from site-specific values. The
95% confidence intervals were all well within half a year. Consequently, the
statewide values displayed in Table 4-32 for these traffic characterizations can be
implemented.

**Table 4-32. Statewide MDF Averages** 

Mon.	VC4	VC5	VC6	VC7	VC8	VC9	VC10	VC11	VC12	VC13
1	0.81	0.81	0.81	0.81	0.90	0.90	0.90	0.87	0.87	0.87
2	0.89	0.89	0.89	0.89	0.95	0.95	0.95	0.89	0.89	0.89
3	0.88	0.88	0.88	0.88	0.98	0.98	0.98	0.88	0.88	0.88
4	0.93	0.93	0.93	0.93	1.01	1.01	1.01	0.96	0.96	0.96
5	1.02	1.02	1.02	1.02	1.06	1.06	1.06	1.05	1.05	1.05
6	1.14	1.14	1.14	1.14	1.12	1.12	1.12	1.16	1.16	1.16
7	1.18	1.18	1.18	1.18	0.98	0.98	0.98	1.07	1.07	1.07
8	1.19	1.19	1.19	1.19	1.08	1.08	1.08	1.10	1.10	1.10
9	1.13	1.13	1.13	1.13	1.03	1.03	1.03	1.07	1.07	1.07
10	1.06	1.06	1.06	1.06	1.05	1.05	1.05	1.11	1.11	1.11
11	0.96	0.96	0.96	0.96	0.96	0.96	0.96	1.00	1.00	1.00
12	0.82	0.82	0.82	0.82	0.87	0.87	0.87	0.83	0.83	0.83

HDFs significantly impact predicted rigid pavement performance but have a negligible impact on flexible pavement performance. Use of statewide and the M-E PDG traffic characterizations defaults produced design life differences in excess of 10 years for rigid pavement. Use of HDF cluster averages, however, produced maximum predicted rigid pavement performance life differences of only 5 years, with a 95% confidence interval within a year of site specific values.

Cluster average HDFs should be utilized for this traffic input for rigid pavement. In contrast, HDF characterizations produced absolutely no difference in predicted performance life. Since this difference is substantial between designs, statewide values can be used for flexible pavement. Both cluster averages and statewide average values are shown in Table 4-33.

Table 4-33. HDF Cluster and Statewide Averages

Hour	Clust	Clust	Clust	State	Hour	Clust	Clust	Clust	State
Hour	1	2	3	Avg	Houl	1	2	3	Avg
0	2.52	1.78	1.05	1.62	12	5.60	6.31	7.24	6.55
1	2.22	1.64	0.89	1.45	13	5.58	6.16	7.12	6.44
2	2.11	1.66	0.97	1.46	14	5.48	5.89	6.97	6.24
3	2.33	2.00	1.22	1.75	15	5.36	5.54	6.62	5.93
4	2.67	2.59	1.74	2.27	16	5.33	5.01	5.49	5.25
5	3.11	3.68	2.60	3.16	17	4.98	4.44	4.54	4.57
6	3.71	4.49	4.32	4.29	18	4.70	3.94	3.46	3.88
7	4.16	5.24	6.08	5.38	19	4.48	3.39	2.82	3.35
8	4.91	6.06	7.42	6.39	20	4.13	2.95	2.30	2.90
9	5.32	6.51	7.43	6.67	21	3.75	2.64	2.00	2.58
10	5.58	6.60	7.33	6.71	22	3.37	2.42	1.63	2.27
11	5.68	6.50	7.41	6.71	23	2.92	2.17	1.34	1.97

• AGPV had a negligible impact on predicted rigid and flexible pavement performance. The maximum performance life difference from site-specific values was only two-years. Additionally 95% confidence intervals for predicted

pavement performance life fell well within half a year of zero. Statewide averages can be used for this traffic input and are displayed in Table 4-34.

**Table 4-34. AGPV Statewide Averages** 

Vehicle class	Single	Tandem	Tridem	Quad
4	1.65	0.36	0.00	0.00
5	2.00	0.05	0.00	0.00
6	1.00	1.00	0.00	0.00
7	1.06	0.06	0.58	0.37
8	2.28	0.74	0.00	0.00
9	1.29	1.85	0.00	0.00
10	1.54	1.00	0.33	0.55
11	4.99	0.00	0.00	0.00
12	3.85	0.96	0.00	0.00
13	2.03	1.40	0.36	0.62

- Single axle load spectra have a moderate effect on predicted rigid and flexible pavement performance. Cluster averages and statewide averages had CIs within a year, with maximum and minimum are around four years difference for rigid pavement and less than three years for flexible. The M-E PDG defaults were higher than this for both pavement types. Cluster and statewide averages produced comparable results, having maximum over or under prediction values within one year of each other for both pavement types. The 95% CIs were within months of each other indicating that statewide averages could be used for this traffic input. Due to the size of the axle load spectra tables, they were placed in Tables H-11 through H-32 in Appendix H for reference.
- Tandem axle load significantly impacted predicted rigid pavement

  performance and had a moderate influence on flexible. Maximum predicted

  performance life differences exceeded 10 years for all developed traffic

  characterizations for rigid pavement. CIs were in excess of one year for statewide

and cluster value whereas the M-E PDG defaults had values between 3 to 6 years.. However, the maximum under prediction CI bound for cluster averages was almost one year better than that of statewide values. Consequently TTC cluster averages were suggested for use in pavement design. Flexible pavement experienced maximum pavement performance life differences of under five years. Confidence intervals for statewide and cluster averages were within two years of zero, Cluster averages produced 95% CIs approximately a quarter of a year better than statewide values, which individually does not warrant their use. However, to stay consistent with rigid design, cluster values are also recommended for flexible design.

- pavement performance. With the exception of the M-E PDG defaults on rigid pavement, the remaining traffic characterizations produced maximum pavement life differences of only 0.5 years. The confidence intervals for all traffic characterizations were within months of zero. Consequently, statewide average tridem axle load spectra can be used for this traffic input.
- Quad axle load spectra do not have significant impact on predicted rigid pavement performance but have a moderate effect on flexible pavement performance. Little difference in predicted pavement performance life was seen across traffic characterizations for rigid pavement. Means, 95% confidence intervals, standard deviations, and maximum difference were either zero or within months of zero. This suggests statewide averages could be used for this traffic input. Traffic characterizations produced a maximum pavement performance life

difference for flexible pavement was approximately four years and was noticed particularly for the rutting distress. The standard deviation and confidence interval was within one for both traffic characterizations. Between traffic characterizations, there was negligible difference in CIs, again warranting use of statewide values.

• The M-E PDG defaults were inferior inputs to statewide or cluster averages.

In general, statewide or cluster averages produced predicted performance lives that were far closer to the site-specific values than the M-E PDG defaults.

Consequently, the M-E PDG defaults are not recommended for use in the state of Michigan.

# 4.6 SELECTION OF APPROPRIATE TRAFFIC CHARACTERIZATION

Once the appropriate traffic characterizations were identified, it was necessary to determine how they could be implemented in design. For the traffic inputs that only need statewide values, selection of the appropriate traffic input is automatic. However, for the traffic inputs that require cluster averages, the discriminant analysis reviewed in Chapter 4 could be implemented to select the appropriate traffic characteristic. The traffic inputs identified as needing Level II data at a minimum are stated below. Discriminant analysis was conducted for these traffic characterizations to aid in the selection of the appropriate cluster to use in design.

- TTC
- HDF (Rigid only)
- Tandem Axle Load Spectra

While there are many outputs in SPSS as discussed in Chapter 3, the outputs that will be summarized in this section that pertain to the model or functions as a whole are:

- Eigenvalue and canonical correlation
- Wilk's Lambda test for model significance
- Standardized canonical discriminant function coefficients
- Fisher's linear discriminant coefficients

The following highlights these outputs for each of the needed traffic inputs.

## 4.6.1 Truck Traffic Classification

The eigenvalue and canonical correlation for the TTC discriminant functions can be seen in Table 35.

Table 4-35. Eigenvalue and Canonical Correlation for TTC Discriminant Functions

Function	Eigenvalue	% of Variance	Cumulative %	Canonical Correlation
1	6.837	88.7	88.7	.934
2	0.874	11.3	100.0	.683

From Table 4-35, it is observed that first function discriminates the TTC variable sufficiently, as it has a high eigenvalue of 6.837 and a relatively high correlation of 0.93. This functions accounts for most of the variance at over 88%. The second function is less discriminatory, having a smaller eigenvalue of 0.874 and weaker correlation of only 0.683, accounting for the rest of the variance. The Wilk's Lambda test for the significance of the model functions is shown in Table 4-36. The Wilk's Lambda test was very significant (p<<0.05), and had a Wilk's Lambda value of 0.068. Both measures indicate that the model sufficiently discriminates the TTC dependent variable.

Table 4-36. Wilk's Lambda Test for Significance of Model

Test of Function	Wilks' Lambda	Chi- square	df	Sig.
1 through 2	.068	68.515	32	.000
2	.534	16.014	15	.381

Now that the model is shown to be significantly discriminatory, the individual independent values can be explored to determine which variables have the most discriminatory power. The standardized canonical discriminant function coefficients are shown in Table 4-37. It should be noted that the vehicle class percentages are removed in this analysis because if a classification count was available, there is no need to use the clustering algorithm.

Table 4-37. Standardized Canonical Discriminant Function Coefficients

Predictor Variable	Function		
	1	2	
Region	.522	.559	
Functional Class	.296	.188	
Food Product Truck %	.081	-1.755	
Fabricated Metal Products Truck %	870	1.069	
Machinery Truck %	-1.082	.038	
Rubber and Plastics Truck %	1.385	.995	
Furniture and Fixtures Truck %	864	700	
Electrical Equipment Truck %	286	915	
Total Tons	.580	.879	
AADTT	-1.025	124	
Miscellaneous Manufacturing Products Truck %	247	.075	
Road Class	.135	463	
Printed Matter Truck %	.663	.653	
Paper and Pulp Products Truck %	1.286	.114	
Logs, Lumber and Wood Products Truck %	.437	.840	
Transportation Equipment Truck %	061	760	

Table 4-37 shows that Rubber and Plastics Products Truck %, Paper and Pulp Products Truck %, AADTT, and Machinery Truck % possess the most discriminatory power for function 1. The Food Product Truck %, Fabricated Metal Products Truck % and Rubber and Plastics Truck % are the most discriminatory variables in Function 2.

The Fisher's linear discriminant coefficients for classifying the TTC dependent variable can be found in Table 4-38.

Table 4-38. Fisher's Linear Discriminant Coefficients for TTC Variable

		TTC	
	1	2	3
Region	3.659	5.841	5.151
Functional Class	004	.353	.292
Food Product Truck %	.184	318	1.327
Fabricated Metal Products Truck %	3:602	1.440	209
Machinery Truck %	3.017	-4.340	-5.021
Rubber and Plastics Truck %	-10.051	-2.118	-3.717
Furniture and Fixtures Truck %	7.900	-2.844	346
Electrical Equipment Truck %	5.583	3.042	5.117
Total Tons	5.278E-7	8.601E-7	7.120E-7
AADTT	.004	003	003
Miscellaneous Manufacturing Products Truck %	-20.924	-25.202	-26.132
Road Class	15.404	15.973	18.157
Printed Matter Truck %	-1.115	12.462	8.533
Paper and Pulp Products Truck %	143	1.811	1.887
Logs, Lumber and Wood Products Truck %	.772	1.517	1.107
Transportation Equipment Truck %	.800	.462	1.012
(Constant)	-40.502	-37.882	-38.245

The results of the classification algorithm are displayed in Table 4-39.

Table 4-39. Classified Sites into TTC Clusters Through Discriminant Analysis

		TTC	Predicted	Total		
Tic			1	2	3	Total
	Count	1	11	0	0	11
		2	0	15	1	16
Original		3	0	3	6	9
Original	%	1	100.0	.0	.0	100.0
		2	.0	93.8	6.3	100.0
		3	.0	33.3	66.7	100.0

The results of the classification shown in Table 4-39 reveal that 88.9% of sites were clustered into their original groups. While not as high as the HDF variable, this still provides a significant procedure for identifying the TTC cluster a site belongs to.

#### **4.6.2 Hourly Distribution Factor**

While the results of HDF have been presented in the example reviewed in Chapter 3, it is stated again for completeness. The eigenvalue and canonical correlation developed for each of the functions is contained in Table 4-40.

Table 4-40. Eigenvalue and Canonical Correlation for HDF Discriminant Functions

Function	Eigenvalue	% of Variance	Cumulative %	Canonical Correlation
1	6.739	82.8	82.8	.933
2	1.397	17.2	100.0	.763

Table 4-40 reveals that function 1 discriminates the dependent variable well, having a high eigenvalue and a correlation close to 1 (0.93), explaining over 83% of the variance. This second function has less ability to distinguish between cluster, having an eigenvalue of 1.397 and a correlation of only 0.76.

The Wilk's Lambda test to determine if the functions created in the model produce statistically significant results is shown in Table 4-41.

Table 4-41. Wilk's Lambda Test for Significance of HDF Model

Test of Functions	Wilks' Lambda	Chi- square	df	Sig.
1 through 2	.054	71.553	36	.000
2	.417	21.420	17	.208

The Wilk's Lambda test shown in Table 4-41 states that the overall model produces mean discriminant scores for the clusters that are statistically different (p < 0.05). The Wilk's Lambda is also close to zero. Consequently the model discriminates well. This allows for the standardized canonical discriminant function coefficients to be evaluated to determine which predictor variable discriminates HDF the most. These coefficients are shown in Table 4-42.

Table 4-42 reveals that for function 1, Miscellaneous Manufacturing Products Truck %, VC 9%, Total Tons and Machinery Truck % percentage trucks are the most influential discriminating variables while rubber and plastics truck %, logs lumber and wood truck %, and AADTT are the most influential discriminating variables in function 2.

In order to classify a given site based on the model created, Fisher's linear discriminant coefficients have been created and are displayed in Table 4-43. These coefficients, when plugged into the linear regression equations for each cluster, will create the classification scores that will the future design site into the appropriate HDF cluster as shown in Section 3.5 of this report.

Table 4-42. Standardized Canonical Discriminant Function Coefficients for HDF Model

	Function		
	1	2	
Region	.102	526	
Functional Class	694	019	
Food Product Truck %	.248	901	
Fabricated Metal Products Truck %	695	266	
Machinery Truck %	1.302	353	
Rubber and Plastics Truck %	987	1.315	
Furniture and Fixtures Truck %	329	159	
Electrical Equipment Truck %	1.124	487	
Total Tons	1.426	955	
VC 5 %	.982	.577	
VC 9 %	1.821	.013	
AADTT	086	1.159	
Miscellaneous Manufacturing Products Truck %	-2.154	.989	
Road Class	.904	.175	
Printed Matter Truck %	.454	338	
Paper and Pulp Products Truck %	534	1.102	
Logs, Lumber and Wood Products Truck %	.434	-1.313	
Transportation Equipment Truck %	1.004	.494	

Table 4-43. Fisher's Linear Discriminant Coefficients for HDF Variable

	HDF					
Predictor Variable						
	1	2	3			
Region	.854	1.353	.507			
Functional Class	-1.451	675	291			
Food Product Truck %	-4.838	-4.457	-5.400			
Fabricated Metal Products Truck %	-2.927	984	409			
Machinery Truck %	21.080	14.999	10.592			
Rubber and Plastics Truck %	-15.924	-14.435	-9.627			
Furniture and Fixtures Truck %	-7.998	-4.070	-3.091			
Electrical Equipment Truck %	14.782	10.109	5.963			
Total Tons	2.880E-6	2.408E-6	1.843E-6			
VC 5 %	4.098	3.552	3.440			
VC 9 %	5.574	4.723	4.291			
AADTT	0044	0074	0042			
Miscellaneous Manufacturing Products Truck %	-116.520	-87.319	-60.573			
Road Class	32.470	23.673	20.212			
Printed Matter Truck %	57.649	53.170	47.277			
Paper and Pulp Products Truck %	-1.504	-1.529	488			
Logs, Lumber and Wood Products Truck %	1.886	2.145	1.250			
Transportation Equipment Truck %	4.685	2.697	2.209			
(Constant)	-276.774	-189.364	-156.574			

The results of the classification algorithm are shown in Table 4-44. Overall, 97.2% of the sites were clustered correctly, making the model very effective for selecting the appropriate HDF value based on the set of available predictor variables.

**Table 4-44. Classified Sites into HDF Clusters Through Discriminant Analysis** 

TTC			Pre N	Total		
			1	2	3	
			5	0	0	11
	Count	2	0	16	1	16
Original		3	0	0	14	9
Original	% 1 2 3	1	100.0	.0	.0	100.0
		2	.0	94.1	5.9	100.0
		3	.0	.0	100.0	100.0

#### 4.6.3 Tandem Axle Load Spectra

The eigenvalue and canonical correlations for the tandem axle load spectra discriminant functions are displayed in Table 4-45. The additional functions are due to their being five clusters for this dependent variable.

Table 4-45. Eigenvalue and Canonical Correlation for Tandem Axle Load Spectra
Discriminant Functions

Function	Eigenvalue	% of Variance	Cumulative %	Canonical Correlation
1	4.590	51.3	51.3	.906
2	2.387	26.7	78.0	.840
3	1.488	16.6	94.7	.773
4	0.477	5.3	100.0	.568

Table 4-45 shows that unlike the previous two dependent variables, there is not an equation which discriminates the tandem axle load spectra clusters definitively. Function 1 and function 2 have the most discriminatory power, having eigenvalues and canonical correlations 2.387 and 4.590, respectively. The Wilk's Lambda test shown in Table 4-46 reveals that the model using all four functions (first row), has any statistical significance in discriminating the tandem axle load spectra at a 95% confidence level (p < 0.05). The remaining models do not discriminate as effectively.

Table 4-46. Wilk's Lambda Test for Significance of Model

Test of Function(s)	Wilks' Lambda	Chi- square	df	Sig.
1	.014	99.697	72	.017
2	.080	59.252	51	.200
3	.272	30.580	32	.538
4	.677	9.162	15	.869

The standardized canonical discriminant function coefficients for each function can be seen in Table 4-47. The Total Tons, AADTT, Functional Class, Miscellaneous

Table 4-47. Standardized Canonical Discriminant Function Coefficients

	Function				
	1	2	3	4	
Region	.178	.372	.239	.122	
Functional Class	1.609	.910	149	.281	
Food Product Truck %	540	693	1.841	-2.217	
Fabricated Metal Products Truck %	1.201	576	164	1.261	
Machinery Truck %	323	1.805	867	.926	
Rubber and Plastics Truck %	395	248	-1.518	889	
Furniture and Fixtures Truck %	069	150	.299	.385	
Electrical Equipment Truck %	1.184	1.404	1.284	1.110	
Total Tons	4.264	2.895	.023	1.203	
VC 5 %	.911	048	.077	424	
VC 9 %	1.496	.526	1.208	-1.283	
AADTT	-3.782	-2.462	.045	.319	
Miscellaneous Manufacturing Products Truck %	-1.986	-2.345	500	-1.302	
Road Class	122	308	.931	.335	
Printed Matter Truck %	557	033	799	.609	
Paper and Pulp Products Truck %	.000	.544	.786	525	
Logs, Lumber and Wood Products Truck %	294	762	.471	.438	
Transportation Equipment Truck %	657	100	014	.004	

Manufacturing Truck % and VC 9 % all seem to substantially contribute to the discriminatory power of function 1 and function 2 as well. Total Tons AADTT and VC 9

% are seemingly directly relatable as they are influences or byproducts of the tandem axle loads on the roadways. Food Class Truck %, Electrical Equipment Truck % and VC 9 % influence functions 3 and 4.

Fisher's linear discriminant coefficients for classifying a potential design site are shown in Table 4-48.

Table 4-48. Fisher's Linear Discriminant Coefficients for Tandem Axle Load Spectra Variable

	A	Il Tander	n Axle Lo	oad Specti	ra
	1	2	3	4	5
Region	1.282	2.239	1.189	1.611	2.041
Functional Class	2.461	4.322	2.407	2.281	2.439
Food Product Truck %	-5.417	-4.337	-2.360	-3.045	-1.905
Fabricated Metal Products Truck %	4.683	5.822	4.626	2.298	3.609
Machinery Truck %	-3.413	-5.404	-12.092	-2.438	-7.021
Rubber and Plastics Truck %	-8.241	-11.219	-9.401	-8.291	-13.481
Furniture and Fixtures Truck %	4.969	3.750	5.006	3.681	6.634
Electrical Equipment Truck %	5.472	13.573	5.070	6.119	11.379
Total Tons	1.952E-6	3.692E-6	1.837E-6	1.826E-6	2.079E-6
VC 5 %	2.615	2.965	2.771	2.608	2.658
VC 9 %	2.974	3.710	3.334	3.200	3.400
AADTT	018	038	019	019	020
Miscellaneous Manufacturing Products Truck %	-31.062	-70.104	-21.781	-31.707	-41.838
Road Class	8.367	8.441	10.925	8.363	14.280
Printed Matter Truck %	22.003	6.732	11.655	16.561	9.506
Paper and Pulp Products Truck %	1.240	2.187	1.740	2.244	2.647
Logs, Lumber and Wood Products Truck %	.657	.104	.884	.316	.884
Transportation Equipment Truck %	-1.598	-2.516	-1.802	-1.456	-1.634
(Constant)	-108.356	-151.896	-126.900	-117.762	-143.980

The results of the classification analysis can be seen in Table 4-49.

Table 4-49. Classified Sites into Tandem Axle Load Spectra Clusters Through Discriminant Analysis

All Tandem Axle Load Spectra		Predicted Group Membership				Total		
		1	2	3	4	5	10(4)	
		1	2	0	1	1	0	4
		2	0	8	0	0	0	8
	Count	3	0	1	10	0	0	11
		4	1	0	0	6	1	8
Original		5	0	0	0	0	5	5
Original		1	50.0	.0	25.0	25.0	.0	100.0
	% 2 3 4	.0	100.0	.0	.0	.0	100.0	
		3	.0	9.1	90.9	.0	.0	100.0
		4	12.5	0	.0	75.0	12.5	100.0
		5	.0	.0	.0	.0	100.0	100.0

The classification algorithm correctly clustered 86.1% of the sites. Since the number of sites is small, having 5 groups does not leave a large sample size in each cluster. This could also contribute to the inaccuracies of the discriminant scheme. Even with this detriment, the tandem axle load spectra cluster can still be selected with reasonable accuracy.

### **4.6.4** Summary and Use of Discriminant Analysis

The Fisher linear discriminant coefficients developed and presented in this section can be used to classify a given future design site based on the independent variables accessible to the MDOT or any consulting firm prior to design of the roadway. For the variables mentioned in the beginning of this section that require cluster averages to improve design quality, the proper selection of the appropriate traffic cluster is crucial. The procedure reviewed in Section 3.5 can be applied for any of the four traffic characterizations reviewed in this section for the proper selection of the needed traffic characteristic.

## CHAPTER 5 - CONCLUSIONS AND RECOMMENDATIONS

The current AASHTO 1993 pavement design utilizes 18-kip Equivalent Single Axle Loads (ESALS) for determining pavement thicknesses. However, the development of the Mechanistic Empirical Pavement Design Guide (M-E PDG) under NCHRP Project 1-37 does not use ESALs but instead requires the characterization of truck traffic directly. The principle goal of this research was to characterize the truck traffic found in the state of Michigan to develop the traffic-related M-E PDG inputs at various input levels for use in the ME-PDG software. These design input levels have been separated into three distinct groups based on the amount of knowledge the design engineer has about the particular traffic characteristic. The three levels are outlined in the M-E PDG Design Guide and are as follows (1):

- Level I There is a *very good* knowledge of past and future traffic characteristics.
- Level II There is a *modest* knowledge of past and future traffic characteristics.
- Level III There is a *poor* knowledge of past and future traffic characteristics.

## 5.1 EFFECT OF DATA COVERAGE ON TRAFFIC CHARACTERIZATION DEVELOPMENT

In order to establish traffic patterns within the state, raw weigh-in-motion (WIM) and classification data from 41 WIM stations maintained in the state of Michigan were quality checked and processed using TrafLoad. During this process, the question of how much data to collect, i.e. length of time) was raised. Thus the effect of length of data coverage, one week per month (OWPM) vs. continuous site-specific, was explored in this study. The OWPM pavement performance life was both under and over estimated, but had a maximum difference of 3.33 years with a 95% confidence of approximately 0.5 to

1.5 years overestimation of pavement design life. Certain traffic elements known to be the most variable from the traffic input perspective seemed to have little effect on the OWPM pavement performance life. The only exception to this was the continuous AADTT value for rigid pavement. Use of OWPM data in conjunction with continuous AADTT resulted in values that were closer to site specific. However, if the data retrieval takes minimal effort from WIM or classification stations, it is recommended that continuous traffic data be used wherever possible.

## 5.2 TRAFFIC ELEMETS IN THE M-E PDG UTILIZED FOR HIERARCHICAL CHARACTERIZATION

The characterization of traffic is one of the significant elements in the analysis and design of pavements (flexible, rigid, and composite). The M-E PDG requires an array of traffic inputs to facilitate analyses. Of the available inputs the following were analyzed for Michigan practice:

- Truck Traffic Classification (TTC)
  - o Percentage of truck traffic for each FHWA vehicle class 4-13, ten total
- Monthly Distribution Factor (MDF)
  - o Set of 12 factors, one for each month
- Hourly Distribution Factor (HDF)
  - o Set of 24 factors, one for each hour
- Axle Groups per Vehicle (AGPV)
  - o Single
  - o Tandem
  - o Tridem

- o Quad
- Axle load dist/spectra
- O Loading proportions for each vehicle class and each axle group, 40 total The development of Level II inputs for the state of Michigan allows for the use of region or statewide values to ensure a certain measure of traffic reliability when Level I data is unavailable.

#### 5.3 TRAFFIC CHARACTERIZATION DEVELOPMENT

To develop the hierarchical traffic inputs the following was performed:

- Level I Direct conversion of WIM and classification data to the M-E PDG format using TrafLoad
- Level II Utilized cluster analysis to form groups with similar traffic characteristics. The values of these characteristics were then averaged to create a Level II traffic input for the M-E PDG program.
- Level III A direct average from all sites for the particular traffic characteristic was performed to create Level III data.

The development of Level II established the following:

• AADTT was not grouped according to the clustering algorithm. Instead, this traffic input was grouped into low medium and high traffic volume. Low was under 1000 AADTT, medium was from 1000 to under 3000 AADTT, and high was greater than 3000 AADTT for the design lane in one direction. Twenty-three sites had low AADTT, 12 had medium AADTT and the remaining six had high AADTT. It was anticipated that the MDOT will know the AADTT site before-

- hand, therefore, further development of this traffic characterization was not considered.
- Truck traffic classification clustering identified three specific traffic patterns that centered on VC 5 and VC 9, which dominate the traffic stream. The first traffic clustering was dominated by VC 9 trucks and to a lesser extent VC 5. The second cluster had a roughly equal distribution of VC 5 and VC 9 trucks. The third cluster had dominance of VC5 trucks and to a lesser extent VC 9.
- Monthly distribution factors were divided into groupings of VC 4-7, VC 8-10 and VC 11-13 or single-unit, tractor-trailer combination and multi-trailer combination. While three traffic clusters were formed for VC 4-7, four for VC 8-10 and five for VC 11-13, all exhibited a similar trend of high peak summer months and low MDFs in the winter. VC 8-10 groups had more of a uniform MDF distribution throughout the year which indicated that little seasonal variation existed in this grouping.
- Hourly distribution factors exhibited three patterns. The first cluster had a more uniform distribution throughout the day which seemed to indicate a large number of through-trucks used the roadway. The third cluster had a more rush-hour peak in which a majority of the truck volume was mobile between the hours of 9 a.m. to 5 p.m. The final cluster was an average of the other two.
- The single, tandem, tridem, and quad AGPV had three, three, four and five clusters, respectively. However, little difference could be seen amongst the groups formed.

- The single axle load spectra had three clusters, which peaked in the 4-7 kip and 9-14 kip range. Individual VCs were found to display similar axle load distributions across sites. Consequently, it was found that the prevalence of one peak over another was dependent on the percentage of VC 5 and VC 9 in the traffic stream.

  A large number of VC 5 exhibited a dominant peak in the 4-7 kip range whereas a dominance of VC 9 had a higher peak in the 9-14 kip range.
- The tandem axle load spectra had five clusters. Clusters 1-3 were shown to have more light axles than heavy, whereas clusters 4 and cluster 5 are more even to heavy in nature. There were two peaks observed in the spectra which seemed to correspond to unloaded (9-14 kips) and loaded (30-35 kips) trucks.
- A total of three tridem axle load spectra clusters were created using the clustering algorithm. The general trend of the tridem axle clusters appears to be a large proportion of light axles around 12 kips followed by a smaller peak value around 40-45 kips.
- A total of four quad axle load spectra clusters were formed. Peak values for the quad axle load spectra occur at the 15-20 kip, 50-60 kip and the 104 kip range.

  Perhaps the most significant finding in the analysis of overall quad axles is the presence of the 104 kip load, which can be over 15% for the cluster 3 case.

  Having such a high loading on one quad axle, double the allowed weight, at all sites suggests is most likely due to the TrafLoad processing itself is erroneous. A truck having two successive quads in a raw data file is seemingly being combined into one axle in TrafLoad. Consequently, the quad axle loads developed in this report will be inherently erroneous and not suitable for design.

Additionally, general analyses of all developed traffic inputs resulted in the following observations:

- There is very little seasonal (month to month) variation in axle load spectra for most vehicle classes. The exceptions to this are the vehicle classes that constitute a very low percentage of the traffic volume and are on low AADTT roads. These susceptible VCs: VC 4, VC 7, VC 8, VC 11, and VC 12 can produce highly variable load spectra due to low sample size.
- There is little directional difference in axle load spectra for most vehicle classes. Only VC 10 and VC 13 exhibited directional difference. This most likely is due to these truck types being local in nature, perhaps traveling to and from a logging site or gravel pit. This is an important observation as it substantiates the need to only analyze a single direction.
- The single axle loads within a given vehicle class for nearly all sites are similar. This can make it possible to obtain average values for the single axle load distribution for each vehicle class with seemingly minimal error.
- The single axle load distribution seems to depend on the quantity of VC 5 and VC 9 vehicles. Higher proportions of VC 5 yield a single axle load spectra (all vehicle classes) that is dominant around 3-6 kips while higher VC 9 proportions lead to distributions that have high frequencies that range from 11-13 kips.
- The tandem axle load distributions greatly depend on the axle load spectra of
   VC 9. Distributions using all axle load spectra from each vehicle class compared

to that of VC 9 were very similar. This suggests VC 9 controls tandem axle loading.

• The tridem and quad axle load spectra are almost entirely composed of VC

10 and VC 13 data. This is due to the fact that other than VC 7, which makes up
very little of the traffic stream, VC10 and VC 13 are the only axles which have
tridem and quad. Focus on these two vehicle classes for the state are all that is
needed to capture these axle configuration.

#### 5.4 TRAFFIC CHARACTERIZATION FOR DESIGN

In design, it is recognized that site-specific data be used wherever available. For sites in which site-specific data is unavailable, it is necessary to know whether Level II data or Level III data is acceptable at a minimum for design. To determine this, comparisons were made in the M-E PDG regarding predicted performance life differences from site-specific data amongst the various traffic characterizations. Both rigid and flexible pavements were analyzed to investigate impact of the traffic inputs on predicted performance. This led to the selection of the appropriate traffic characterization for each traffic input. The following is the summary of results. The sensitivity definitions can be found in Table 5-1

Table 5-1. Impact Designation for the M-E PDG Results

Designation of Impact	95% CI Bound (Years)	Minimum or Maximum Bound (Years)
Significant	CI Bound > 1	MM Bound > 5
Moderate	½ < CI Bound < 1	2 < MM Bound < 5
Negligible	CI Bound < ½	MMBound < 2

- moderately affects flexible pavement performance. With the exception of cluster averages or rigid pavement, the traffic characterizations had 95% CIs greater than 1 year and maximum performance life differences in excess of 5 years. TTC cluster averages for rigid pavement produced a CI bound half a year less than the other two characterizations and had maximum values under 5 years. Thus, TTC clusters (Level II) were suggested for use in rigid design.

  Although there was no observable difference in impact between cluster averages and statewide values, TTC cluster averages (Level II) are also recommended for flexible design for consistency.
- MDFs have a negligible impact on predicted rigid and flexible pavement
  performance. The developed MDF traffic characterizations collectively
  produced a maximum of 2 years difference in pavement life from site specific
  values. Accordingly, it is recommended that statewide averages (Level III) be
  implemented.
- HDF significantly impacts rigid pavement but has a negligible effect on flexible pavement. Use of statewide and the M-E PDG traffic characterizations defaults produced design life differences in excess of 10 years for rigid pavement. Use of HDF cluster averages, however, produced maximum predicted rigid pavement performance life differences of only 5 years, with a 95% confidence interval within a year of site specific values. Consequently, Cluster average (Level II) HDFs should be utilized for this traffic input for rigid pavement. In contrast, HDF characterizations produced absolutely no difference in

- predicted performance life, warranting use of statewide averages (Level III) for flexible pavement.
- AGPV had a negligible impact on predicted rigid and flexible pavement performance. The maximum performance life difference from site-specific values was only two-years. Additionally 95% confidence intervals for predicted pavement performance life fell well within half a year of zero. From these observations, it is recommended that statewide averages (Level III) be used for this traffic input.
- Single axle load spectra have a moderate effect on predicted rigid and flexible pavement performance. While the confidence interval across the traffic characterizations remains within a year, the maximum and minimum are around four years difference for rigid pavement and less than three years for flexible.

  The M-E PDG defaults were higher than this for both pavement types. Cluster and statewide averages produced comparable results, having maximum over or under prediction values within one year of each other for both pavement types.

  The 95% CIs for both of these traffic characterizations were also within months of each other. Therefore, it is recommended that statewide averages (Level III) be used for this traffic input.
- Tandem axle load significantly impacted predicted rigid pavement

  performance and had a moderate influence on flexible. Maximum predicted

  performance life differences exceeded 10 years for all developed traffic

  characterizations for rigid pavement. CIs were in excess of one year for statewide

  and cluster value whereas the M-E PDG defaults had values between 3 to 6 years.

However, the maximum under prediction CI bound for cluster averages was almost one year better than that of statewide values. Consequently TTC cluster averages (Level II) are recommended for use in pavement design. Flexible pavement experienced maximum pavement performance life differences of under five years. Confidence intervals for statewide and cluster averages were within two years of zero. Cluster averages produced 95% CIs approximately a quarter of a year better than statewide values, which individually does not warrant their use. However, to stay consistent with rigid design, cluster values (Level II) are also recommended for flexible design,

- Tridem axle load spectra do not have a significant impact on predicted rigid and flexible pavement performance. With the exception of the M-E PDG defaults on rigid pavement, the remaining traffic characterizations produced maximum pavement life differences of only 0.5 years. Consequently, it is recommended that statewide average tridem axle load spectra (Level III) can be used for this traffic input.
- Quad axle load spectra have a negligible impact on predicted rigid pavement performance but have a moderate effect on flexible pavement performance.

  Little difference in predicted pavement performance life was seen across traffic characterizations for rigid pavement. Means, 95% confidence intervals, standard deviations, and maximum difference were either zero or within months of zero.

  This suggests statewide averages could be used for this traffic input. Traffic characterizations produced a maximum pavement performance life difference for flexible pavement was approximately four years and was noticed particularly for

the rutting distress. The standard deviation and confidence interval was within one for both traffic characterizations. Between traffic characterizations, there was negligible difference in CIs. Therefore, for rigid and flexible pavement designs, it is recommended that statewide values (Level III) be used.

• The M-E PDG defaults were inferior inputs to statewide or cluster averages.

In general, statewide or cluster averages produced predicted performance lives that were far closer to the site-specific values than the M-E PDG defaults.

Consequently, the M-E PDG defaults are not recommended for use in the state of Michigan, with the exception of quad axle loads.

Table 5-2 is created here to summarize the above conclusions and recommendations:

Table 5-2. Impact of Characterized Traffic on M-E PDG Pavement Performance.

Traffic Characteristic	Sensitivity Impact in the M-E PDG		Minimum Recommended Input Level (When Level I is unavailable)	
	Rigid Pavement Design	Flexible Pavement Design	Rigid Pavement Design	Flexible Pavement Design
TTC	Significant	Moderate	Level II	
HDF	Significant	Negligible	Level II	Level III
MDF	Negligible		Level III	
AGPV	Negligible		Level III	
Single Axle Load Spectra	Moderate		Level III	
Tandem Axle Load Spectra	Significant	Moderate	Level II	
Tridem Axle Load Spectra	Negligible	Negligible	Level III	
Quad Axle Load Spectra	Negligible	Moderate	Level III	

## 5.5 SELECTION OF APPROPRIATE LEVEL II TRAFFIC CHARACTERIZATION FOR DESIGN

Once the appropriate traffic characterizations were established, it was necessary to determine how they could be implemented in design. For the traffic inputs where site specific (Level I) data or only statewide values (Level III) need to be used, selection of the appropriate traffic input is automatic. However, for the traffic inputs that require cluster averages, the discriminant analysis reviewed in Chapter 4 could be implemented to select the appropriate traffic characteristic cluster for design. The discriminant analysis algorithm can be used for following traffic inputs requiring at a minimum Level II data:

- TTC
- HDF (Rigid only)
- Tandem Axle Load Spectra

Fisher's linear discriminant coefficients developed for each of these traffic characteristics will assist in the selection of the appropriate traffic characteristics for design purposes. The following will need to be provided prior to design before being able to select the appropriate traffic characteristic:

- Vehicle freight commodity truck percentage for the following commodities
  - Food Products
  - o Fabricated Metal Products
  - o Transportation Products
  - o Logs, Lumber and Wood Products
  - Machinery
  - Rubber and Plastics

- o Paper and Pulp Products
- o Furniture and Fixtures
- o Miscellaneous Manufacturing Products
- o Printed Matter
- o Electrical Equipment
- Road class
- Geographic region
- AADTT
- VC 5%
- VC 9%
- Functional class (rural/urban)
- Roadway annual tonnage

Inputting the values into the linear regression equations developed in this research will lead to the appropriate traffic input cluster to use in the M-E PDG.

# 5.6 EXPANSION OF DATA COVERAGE TO FACILITATE IMPROVED TRAFFIC CHARACTERZATION WITHIN THE STATE

It is recommended, wherever possible, to expand the geographic coverage of traffic characteristics in Michigan. When a new WIM or classification needs to be placed, should be placed in areas where little traffic data is known. Short duration and continuous counts should be coordinated between projects and other agencies to ensure data is being shared and additional duplicative efforts are not being made. Heavy emphasis is placed on the need for effective communication between data collection personnel and pavement design engineers. It is paramount that each side understands one

another's needs. In addition to a collaborative effort, summary of the data is crucial for creating a potent data collection and pavement design system. Readily accessible and relatable summarized traffic information makes efficient use of data collection efforts. Wherever possible, the collected data should be placed in a computer-based program, preferably with GIS linkage that allows for easily summarization and retrieval (5). Additionally, the following specific traffic collection efforts should be made:

- The TMG recommends that the short duration volume coverage count program should provide comprehensive coverage across the roadway infrastructure on a cycle of 6 years. Short duration classification counts should account for at least 25-30% of all volume counts being conducted wherever possible. Additionally, at least one vehicle classification count should be made on each route annually.
- The TMG recommends that for 95% confidence and 10% error in the precision of the traffic factors formed within a seasonal group, five to eight continuous counters should be established per group. New seasonal factors should be compared to the ones formed and placed into the appropriate group.
- The TMG recommends that at least six continuous vehicle classification counters
  be established for each factor group. Continuous counts should be placed on
  different functional classes and different geographic regions within the state (5).
  Emphasis should be placed on roads that are primarily local or long hauls. When
  new sites are added, the data should be compared and placed into the appropriate
  existing factor groups.
- The TMG recommends that for all sites within a TWRG, a minimum of six should be monitored, with at least one of the WIM sites operating continuously

and recording two or more lanes of traffic (5). The amount of permanent WIM stations and discontinuous portable systems is a function of the number of TWRGs created, the accuracy at which the measured weights are taken, and the budget of the state agency (5).

With proper coverage of existing groups and a gradual expansion into unmonitored areas within the state through movement of permanent devices, the data collection program will be more robust. Maintaining a consistent cycle of collection and storing efforts will allow for reliable estimates of traffic inputs into the M-E PDG without the use of such devices as discriminant analysis.

#### 5.6 RECOMMENDATIONS FOR FURTHER RESEARCH

Throughout the course of this project, there have been numerous difficulties encountered, as well as questions raised that could lead to further development of this subject. The following outlines recommendations and suggestions for furthering research in this area:

Improvement of the TrafLoad program. While the TrafLoad was useful in developing the traffic characterizations into the appropriate format for use in the M-E PDG, there numerous problems encountered. These consisted of an inability to determine the specific cause of a formatting error in the file due to the failure of TrafLoad to identify the source of the problem when performing a validation check of the data. Additionally, seemingly random "bug" errors would initiate after loading or processing files for an extended period of time. This would result in the program closing entirely and involve a reboot of the computer to rectify. Finally, during the course of this research it was seen that the development of

- quad axle loads is erroneous within the program. This and the aforementioned issues need to be rectified for easier facilitation of design in the M-E PDG
- Expand pavement design scenarios from those developed. This research only facilitated analysis with two designs in the M-E PDG deemed typical of sites found within the state. These designs should be further expanded to capture a wider variety of design scenarios to ensure that the findings established in this research were not exclusive to the designs utilized. Additionally, the interactive effects with other variables should be investigated.
- Compare "real-life" distresses with M-E PDG distress outputs based on hierarchical traffic characterizations and actual pavement designs. Relating the distress outputs to those in "real-life" rather than comparing against a base design in M-E PDG will give more validity and understanding to the findings.
- Compare the effect of utilizing hierarchical traffic characterization with that of ESALs.





142 142 7H5

> LIBRARY Michigan State University

PLACE IN RETURN BOX to remove this checkout from your record.

TO AVOID FINES return on or before date due.

MAY BE RECALLED with earlier due date if requested.

DATE DUE	DATE DUE	DATE DUE
	1	

5/08 K./Proj/Acc&Pres/CIRC/DateDue.indd

## CHARACTERIZATION OF TRUCK TRAFFIC IN MICHIGAN FOR THE NEW MECHANISTIC EMPIRICAL PAVEMENT DESIGN GUIDE

#### **VOLUME II**

Ву

Joel Thomas Brown

#### A THESIS

Submitted to
Michigan State University
in partial fulfillment of the requirements
for the degree of

MASTER OF SCIENCE

Civil Engineering

2009

**Appendix A**Infrastructure and Methodology

#### A. Processing of Raw Data in TrafLoad

The following presents the algorithms present within the TrafLoad software for developing the various traffic characteristics for use in the M-E PDG. These algorithms are presented in presented in Part 4 of the TrafLoad manual but are reviewed here for understanding and completeness (3). The TrafLoad accepts "W-records" (7-cards) as well as "C-records" (4-cards). The MDOT maintains this formatting as discussed in Section 6 of the TMG (5). For this analysis only the outer lane was used despite TrafLoad's capabilities of processing multiple lanes. Multiple lanes were not utilized as pavement design focuses on the outer lane since it carries the majority of truck traffic.

#### A.1 Average Annual Daily Truck Traffic

The AADTT was computed in the following manner:

- For each day of week, w, vehicle class, i, month, m, and each hour of the day, h,
   obtain an hourly count, HVOLiwm.
- 2. For each day of week, w, vehicle class, i, month, m, sum up the hourly counts and average those summations for the same day of week (Max n=5) within a given month. This provides an average AADTT value for each vehicle class and each day of week for every month, MADWiwm, as shown in Equation 3.1.

$$MADW_{iwm} = \frac{1}{n} \sum_{p=1}^{n} \sum_{h=1}^{24} HVOL_{iwmph}$$
(A.1)

3. Average each  $MADW_{iwm}$  for each month and then average these seven day of week values together to create an AADTT for each vehicle class,  $AADTT_i$ , as shown in Equation 3.2.

$$AADTT_{i} = \frac{1}{7} \sum_{w=1}^{7} \frac{1}{12} \sum_{m=1}^{12} MADW_{iwm}$$
 (A.2)

4. Sum each vehicle class to obtain an overall AADTT for a site, *AADTT<sub>t</sub>*, as shown in Equation 3.3.

$$AADTT_t = \sum_{i=4}^{13} AADTT_i \tag{A.3}$$

#### A.2 Truck Traffic Classification

The calculation of individual truck classification is an extension of AADTT. The percentage of each truck class is found by dividing the individual vehicle class  $AADTT_i$ , by the total AADTT,  $AADTT_t$  as shown in Equation 3.4.

$$TTC_i = \frac{AADTT_i}{AADTT_t} \tag{A.4}$$

#### A.3 Monthly Distribution Factor

The monthly distribution factor is computed in the following manner:

For each MADW<sub>iwm</sub> calculated in Equation 3.2, average the seven day of week
 AADTT values for each month, m, and each vehicle class, i, as shown in
 Equation 3.5. This yields an AADTT value for each month and each vehicle
 class, MADTT<sub>im</sub>.

$$MADTT_{im} = \frac{1}{7} \sum_{w=1}^{7} MADW_{iwm}$$
(A.5)

2. For each vehicle class, i, and each month, m, obtain a monthly distribution factor for each vehicle class and month,  $MDF_{im}$ , by dividing the  $MADTT_{im}$  by the

overall vehicle class  $AADTT_i$  found in Equation 3.5. Equation 3.6 displays this calculation.

$$MDF_{im} = \frac{MADTT_{im}}{AADTT_i} \tag{A.6}$$

3. For this analysis, it was decided to group single-unit trucks (VC 4-7), tractor-single trailer combinations (VC-8-10) and multi-trailer combinations (VC 11-13) for MDF creation for simplification of calculations as suggested by research. To create the MDFs for these groups, a weighted average, based on AADTT of the number of vehicle classes within each group, *k*, was performed for each group, *g*, as shown in Equation 3.7.

$$MDF_{img} = \sum_{i}^{k} MDF_{im} * \frac{AADTT_{i}}{AADTT_{g}}$$
(A.7)

#### **A.4 Hourly Distribution Factor**

The HDFs are created through the following steps:

Sum hourly volume counts HVOLh for each hour for all days in which data was collected. Average this hourly summation by the number of days collected, x, for all 24 hours to yield an average volume count for each hour of the day, HVOLTOTh, as shown in Equation 3.8.

$$HVOLTOT_h = \frac{1}{x} \sum_{i=1}^{x} HVOL_h$$
 (A.8)

2. Sum the averaged hourly volume counts,  $HVOLTOT_h$ , to have a total volume count, TOTVOL, as shown in Equation 3.9.

$$TOTVOL = \sum_{h=0}^{23} HVOLTOT_h \tag{A.9}$$

3. Calculate the hourly HDFs,  $HDF_h$ , by dividing the average hourly volume counts,  $HVOLTOT_h$ , by the total average volume count, TOTVOL as shown in Equation 3.10.

$$HDF_h = \frac{HVOLTOT_h}{TOTVOL} \tag{A.10}$$

#### A.5 Axle Groups Per Vehicle

The axle groups per vehicle for each vehicle class, i, and each axle group, j, (single, tandem, tridem, quad),  $AGPV_{ij}$ , are established by summing all axle groups for all truck records in each vehicle class and axle type,  $A_{ij}$ , and dividing by the number of vehicles in the record for that vehicle class,  $V_i$ . This calculation is shown in Equation 3.11.

$$AGPV_{ij} = \frac{\sum_{i=1}^{y} A_{ij}}{V_{i}} \tag{A.11}$$

#### A.6 Axle Load Spectra

The following outlines the basic procedure for the creation of axle load distributions.

1. For each vehicle class, i, axle type, j, day of week, w, month, m, and load bin, l, and particular day within month, p, (max 5 for any day of week) calculate the number of axle load repetitions, ARijwmlp. Sum these repetitions across all load bins as shown in Equation 3.12 to form a total amount of axles for a given vehicle class, axle type, day of week, month and particular day of month, ARTijwmp.

$$ART_{ijwmp} = \sum_{j=1}^{39} AR_{ijwmlp}$$
 (A.12)

2. For each vehicle class, i, axle type, j, day of week, w, month, m, and load bin, l, and particular day within month calculate the frequency of axles, ALS<sub>ijwmlp</sub>, by dividing the load bin repetition, AR<sub>ijwmlp</sub>, by the overall repetitions, ART<sub>ijwmp</sub>.
This calculation is shown in Equation 3.13.

$$ALS_{ijwmlp} = \frac{AR_{ijwmlp}}{ART_{iwmlp}} \tag{A.13}$$

3. For each vehicle class, i, axle type, j, month, m, and load bin, l, form a monthly axle load frequency for each day of week,  $MALSW_{ijwml}$ , by averaging the particular same days of week within a month as shown in Equation 3.14.

$$MALSW_{ijwml} = \frac{1}{n} \sum_{p=1}^{n} ALS_{ijwmlp}$$
 (A.14)

The conversion of an overall monthly axle load spectra from the day of week values involves a significant number of adjustment calculations. Refer to Chapter 3.3 of Part 4 in the TrafLoad manual for guidance on these calculations.

It was deemed advantageous to cluster axle load spectra for single, tandem, tridem and quad axle configurations as a whole, with all vehicle classes combined. M-E PDG actually multiplies its damage factors based on the combined distribution of all single, tandem, tridem and quad axles and not by individual vehicle classes. Additionally, a review of the data revealed that little month-to-month variation in axle load spectra existed. As such, the following reviews the calculations for combining and averaging axle load spectra across different vehicle classes:

For each month, m, axle type, j, and load bin, l, calculate the total amount of repetitions for each vehicle class, TOTREP<sub>ijml</sub>. This is done by multiplying together the AADTT of the site, MDF for the given month, MDF<sub>m</sub>, AGPV for the vehicle class and axle type, AGPV<sub>ij</sub>, the TTC for the vehicle class, TTC<sub>i</sub>, and the axle load frequency for that month, vehicle class, axle type and load bin. This calculation can be seen in Equation 3.15.

$$TOTREP_{ijml} = AADTT * MDF_m * AGPV_{ij} * TTC_i * ALS_{ijl}$$
 (A.15)

2. For each month, m, axle type, j, and load bin l, sum the total repetitions across all vehicle classes,  $AR_{mil}$ , as shown in Equation 3.16.

$$AR_{mjl} = \sum_{k=4}^{13} TOTREP_{ijl} \tag{A.16}$$

3. For each month, m, and axle type, j, sum the total repetitions found in step 2 across all load bins,  $ART_{mj}$ , as shown in Equation 3.17.

$$ART_{mj} = \sum_{i=1}^{39} AR_{ij}$$
 (A.17)

4. For each axle type, j, month, m, and load bin, l, form a monthly axle load frequency, ALS<sub>ijwml</sub>, by dividing the total repetitions found in Step 2, AR<sub>mjl</sub>, by the cumulative repetitions from Step 3, ART<sub>mj</sub>. This calculation is shown in Equation 3.18.

$$ALS_{mjl} = \frac{AR_{mjl}}{ART_{mi}} \tag{A.18}$$

 Annual axle load spectra were created by taking simple averages of each of the cumulative monthly axle load spectra for each axle type, AALS<sub>jl</sub>, as displayed in Equation 3.19.

$$AALS_{jl} = \frac{1}{12} \sum_{m=1}^{12} ALS_{mjl}$$
 (A.19)

Table A-1. Comprehensive MDOT WIM Sites for Weight and Traffic Recording

		and the second			9	
Site No.	Site Name	Control Section	Year Initiated (Latest Date Calibrated)	Duration of Data	Instrument Type	Road
1459	Bark River	21021	2000 (Oct-06)	Oct. 2006 - Oct. 2007 (WIM) Nov. 2005 - Oct. 2007 (Class)	WIM (Quartz)	Federal (US-2)
1529	Norway	22023	1998	Nov. 2005 - Oct. 2007	WIM (Piezo BL)	Federal (US-2)
2229	Rapid River	21025	2006 (Oct-06)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Federal (US-2)
*6908	Kalkaska	40012	2007	Oct 2007 only	WIM (Quartz) .	Interstate (I-196)
4049	Vanderbilt	69014	2000	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-75)
4129	Houghton Lake	72013	1998 (Jan-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Federal (US-127)
4149	Prudenville	72061	2002	Nov. 2005 - Oct. 2007	WIM (Piezo BL)	Interstate (I-75)
4229	Augres	6073	1997	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Federal (U.S23)
4249	Omer	6072	2002 (Jan-07)	Nov. 2005 - Oct. 2007	WIM (Bending)	Federal (U.S23)
5019	St. Johns	19034	2005 (Oct-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Federal (US-127)
5059	Hudsonville	70024	1996 (Jan-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-196)
5249	Morley	59012	1993	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Federal (US-131)

_
T
÷
Ξ
(cont
۲.
÷.
ď
흦
ap
Ë

			(name) is a comme	(5.200)		
Site No.	Site Name	Control Section	Year Initiated (Latest Date Calibrated)	Duration of Data	Instrument Type	Road
5289	Muskegon	61072	2001 (Jan-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Federal (US-31)
5299	Ionia	34044	1993 (Dec-06)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-96)
6109	Carsonville	74062	1999 (Jan-07)	Nov. 2005 - Oct. 2007	WIM (Bending)	State (M-46)
*6119	Birch Run MC	25032	2007	Oct. 2007 only	WIM (Quartz)	Interstate (I-75)
6129	Birch Run	73171	2005 (Apr-06)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-75)
6309	Clio	25102	1993	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	State (M-57)
6349*	Flint	25032	2000	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Federal (I-75)
6989	Capac	77024	1993	Nov. 2005 - Oct. 2007	WIM (Piezo BL)	Interstate (I-69)
6429	Kawkawlin	9035	1999 (Jan-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-75)
6469	Port Huron	77111	2000 (Jan-07)	Oct. 2006 - Oct. 2007	WIM (Quartz)	Interstate (I-94)
6479	Bay City	9101	1993	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Federal (US-10)

Table A-1. (cont'd)

			VI-iti-t4	cours a)		
Site No.	Site Name	Control Section	(Latest Date Calibrated)	Duration of Data	Instrument Type	Road
7029	Grass Lake	38103	1998 (May-06)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-94)
7109	Schoolcraft	39011	2000	Nov. 2005 - Oct. 2007	WIM	Federal (US-131)
7159	Battle Creek	13082	2000	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Interstate (I-94)
7169*	Marshall	13083	2007	Jul. 2007 - Oct. 2007	WIM (Quartz)	Interstate (I-94)
*6117	Coloma	11017	2000	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Interstate (I-94)
7269	Coldwater	12033	2001 (May-06)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-69)
8029	Mason	33031	2007	Nov. 2005 - Oct. 2007	WIM (Quartz)	Federal (US-127)
8049	Fowlerville	47066	1999	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-96)
8129	Jonesville	30062	2000 (Feb-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Federal (US-12)
8209	South Hill	63022	2000	Nov. 2005 - Oct. 2007	WIM (Piezo BLC)	Interstate (I-96)
8219	Howell	47065	1998 (Feb-07)	Nov. 2005 - Oct. 2007	WIM (Quartz)	Interstate (I-96)

Table A-1. (cont'd)

p s	ral (23)	ate ()	ral (4)	ral (3)	ral (33)	ate (1	ate 5)	ate 5)	ate (1)	) e
Road	Federal (US-23)	Interstate (I-75)	Federal (US-24)	Federal (US-23)	Federal (US-23)	Interstate (I-94)	Interstate (I-275)	Interstate (I-275)	Interstate (I-94)	State (M-6)
Instrument Type	WIM	WIM (Piezo BL)	WIM (Quartz)	WIM (Piezo)	WIM (Quartz)	WIM (Piezo BLC)	WIM (Piezo BL)	WIM (Quartz)	WIM	WIM (Bending)
Duration of Data	Nov. 2005 - Oct. 2007	Nov. 2005 - Mar. 2007	Nov. 2005 - Oct. 2007	Nov. 2005 - Apr. 2006	Nov. 2005 - Oct. 2007	Nov. 2005 - Sept. 2006	Nov. 2005 - Oct. 2007			
Year Initiated (Latest Date Calibrated)	2000	2001	2003 (Feb-07)	2000	1994 (Feb-07)	2000	1993	1998 (Feb-07)		2004 (Jan-07)
Control Section	47014	58151	82053	58034	58034	81062	82291	82292		41064
Site Name	Brighton	Luna Pier	Puritan	Dundee	Lambertville	Ypsilanti	275 @ Penn	275 @ Cherry Hill	Kalamazoo	Cutlerville
Site No.	8229	8249*	8440	*6898	8729	8829	9189	9209	9369*	9759

\*Note sites with an "X" indicates data was not used in continuous analyses. Shaded sites were excluded from the OWPM analyses.

Table A-2. Comprehensive MDOT Classification Sites for Traffic Recording

Road	Federal (US-2)	State (M-28)	Federal (US-10)	State (M-60)	State (M-43)	State (US-12)	Interstate (I-75)
Instrument Type	Classification (Piezo BL)	Classification (Piezo BL)	Classification (Piezo BL)	Classification (Piezo BL)	Classification (Piezo BLC)	Classification (Piezo BLC)	Classification (Piezo BL)
Duration of Data	Jun. 2006 - Oct. 2007	Nov. 2005 - Oct. 2007	Jun. 2007 - Oct. 2007	Jul. 2006 - October 2007	May 2006 - Oct. 2007	Oct. 2006 - Oct. 2007	Nov. 2005 - Oct. 2007
Year Initiated (Latest Date Calibrated)	2006	2004	2006	2006	2000	8661	2002
Control	49023	2041	53022	13022	80041	78022	82194
Site Name	Brevort	Deerton	Branch	Homer	Bangor	White Pigeon	Cicotte
Site Number	2029	2209	3269*	6902	7289*	7329	6626

\*Note sites with an "X" indicates data was not used in continuous analyses. Sites which are shaded were excluded from the OWPM

analyses.

Table A-3. Rigid Pavement ESAL and Pavement Thickness Values

					SUM 20	DVDG	M-E
Site	Single	Tandem	Tridem	Quad	Years @	DNPS	PDG
No.	Axle	Axle	Axle	Axle	2%	Depth	Design
					Growth	(in)	Depth
1450	0150016	2410070	205055	2200000		0.60	(in)
1459	2172216	2419078	305077	2300860	7197230	9.69	9.50
1529	1189919	2374549	102721	1835485	5502674	9.27	9.50
2229	1584790	3324002	85350	1062749	6056891	9.42	10.00
4049	2043999	3908479	259823	2019664	8231966	9.91	10.00
4129	1225273	1737103	147002	1804114	4913493	9.10	9.50
4149	1974023	3137984	243686	4889068	10244761	10.27	10.00
4229	607238	1057828	43990	511471	2220527	7.92	8.50
4249	774123	1165415	65817	726294	2731649	8.22	8.50
5019	2540309	4611972	195729	1987539	9335550	10.11	10.50
5059	4274143	8404008	300907	2332698	15311756	10.95	10.50
5249	8781049	8703620	534227	6629017	24647914	11.81	11.00
5289	2199834	4444503	362400	2473118	9479855	10.14	10.00
5299	5671647	11853774	231379	11690442	29447242	12.14	11.50
6019	272400	320834	50800	346661.4	990695	6.80	8.00
6129	5585871	10012390	505411	4404974	20508646	11.47	11.00
6309	407161	460754.9	84192	603563.8	1555672	7.42	8.00
6369	4698867	18296312	1007032	2926993	26929205	11.97	11.50
6429	3491803	5533331	342242	4414095	13781471	10.77	10.50
6469	4449347	9621073	797768	2303226	17171413	11.15	11.00
6479	2972393	6859762	606714	5316599	15755468	11.00	10.50
7029	16522270	56553279	823196	7750872	81649617	14.21	13.50
7109	3118434	7516762	266543	958709.5	11860448	10.51	10.50
7159	18920867	92343192	1439046	6899957	119603063	15.06	14.00
7269	8975981	28369349	250117	62377.52	37657824	12.61	12.50
8029	2567164	5240522	234909	6045904	14088499	10.81	10.00
8049	5932727	14283983	369192	3433317	24019219	11.76	11.50
8129	1369815	2484214	220574	876640.8	4951243	9.11	9.50
8209	10792223	21502554	2347176	34738139	69380093	13.86	12.00
8219	4668050	8604780	326639	2932765	16532234	11.08	11.00
8229	7012327	15215070	889919	6527671	29644987	12.15	11.50
8440	644628	387405.7	24359	143656.7	1200049	7.06	8.00
8729	11649705	27894101	709527	6163891	46417223	13.03	12.50
8829	9225828	30425920	884983	13991981	54528713	13.36	12.50
9189	10013577	32774533	1274339	21655852	65718300	13.74	12.50
9209	10015609	18425231	883006	13122223	42446069	12.85	11.50
9759	691073	854270.3	53198	352034.1	1950575	7.74	8.50

Table A-4. Flexible Pavement ESAL and Pavement Thickness Values

Site No.	Single Axle	Tandem Axle	Tridem Axle	Quad Axle	SUM 20 Years @ 2%	DNPS Depth (in)	M-E PDG Design Depth
					Growth	. ,	(in)
1459	2172216	2419078	305077	2300860	7197230	9.69	9.50
1529	1189919	2374549	102721	1835485	5502674	9.27	9.50
2229	1584790	3324002	85350	1062749	6056891	9.42	10.00
4049	2043999	3908479	259823	2019664	8231966	9.91	10.00
4129	1225273	1737103	147002	1804114	4913493	9.10	9.50
4149	1974023	3137984	243686	4889068	10244761	10.27	10.00
4229	607238	1057828	43990	511471	2220527	7.92	8.50
4249	774123	1165415	65817	726294	2731649	8.22	8.50
5019	2540309	4611972	195729	1987539	9335550	10.11	10.50
5059	4274143	8404008	300907	2332698	15311756	10.95	10.50
5249	8781049	8703620	534227	6629017	24647914	11.81	11.00
5289	2199834	4444503	362400	2473118	9479855	10.14	10.00
5299	5671647	11853774	231379	11690442	29447242	12.14	11.50
6019	272400	320834	50800	346661	990695	6.80	8.00
6129	5585871	10012390	505411	4404974	20508646	11.47	11.00
6309	407161	460755	84192	603564	1555672	7.42	8.00
6369	4698867	18296312	1007032	2926993	26929205	11.97	11.50
6429	3491803	5533331	342242	4414095	13781471	10.77	10.50
6469	4449347	9621073	797768	2303226	17171413	11.15	11.00
6479	2972393	6859762	606714	5316599	15755468	11.00	10.50
7029	16522270	56553279	823196	7750872	81649617	14.21	13.50
7109	3118434	7516762	266543	958709	11860448	10.51	10.50
7159	18920867	92343192	1439046	6899957	1.2E+08	15.06	14.00
7269	8975981	28369349	250117	62378	37657824	12.61	12.50
8029	2567164	5240522	234909	6045904	14088499	10.81	10.00
8049	5932727	14283983	369192	3433317	24019219	11.76	11.50
8129	1369815	2484214	220574	876641	4951243	9.11	9.50
8209	10792223	21502554	2347176	34738139	69380093	13.86	12.00
8219	4668050	8604780	326639	2932765	16532234	11.08	11.00
8229	7012327	15215070	889919	6527671	29644987	12.15	11.50
8440	644628	387406	24359	143657	1200049	7.06	8.00
8729	11649705	27894101	709527	6163891	46417223	13.03	12.50
8829	9225828	30425920	884983	13991981	54528713	13.36	12.50
9189	10013577	32774533	1274339	21655852	65718300	13.74	12.50
9209	10015609	18425231	883006	13122223	42446069	12.85	11.50
9759	691073	854270	53198	352034	1950575	7.74	8.50

Table A-5. Pearson Correlation Coefficients for Predictor Variables (1 of 2)

Predict. Variable	Pearson Criteria	TTC	Single AGPV	Tandem AGPV	Tridem AGPV	Quad AGPV	HDF
	Pearson Corr.	.507**	.074	.187	.272	.276	.366*
Road	Sig. (2-tailed)	.001	.686	.298	.109	.114	.019
Class	N	41	32	33	36	34	41
	Pearson Corr.	458**	384*	704**	439**	378*	308*
Region	Sig. (2-tailed)	.003	.030	.000	.007	.027	.050
_	N	41	32	33	36	34	41
	Pearson Corr.	637**	116	466**	386*	163	621**
AADTT	Sig. (2-tailed)	.000	.526	.006	.020	.358	.000
	N	41	32	33	36	34	41
	Pearson Corr.	.884**	081	.220	.255	.098	.660**
VC 5 %	Sig. (2-tailed)	.000	.661	.219	.133	.581	.000
	N	41	32	33	36	34	41
	Pearson Corr.	912**	.101	304	255	165	781**
VC 9%	Sig. (2-tailed)	.000	.583	.086	.133	.352	.000
	N	41	32	33	36	34	41
Function	Pearson Corr.	.032	340	476**	239	054	.266
Class	Sig. (2-tailed)	.853	.057	.005	.161	.761	.117
Ciuss	N	36	32	33	36	34	36
Food	Pearson Corr.	600**	114	584**	493**	058	510**
Products	Sig. (2-tailed)	.000	.533	.000	.002	.746	.001
Truck %	N	36	32	33	36	34	36
Fabr.	Pearson Corr.	703**	007	600**	399*	200	458**
Metal	Sig. (2-tailed)	.000	.968	.000	.016	.256	.005
Products Truck %	N	36	32	33	36	34	36
Trans.	Pearson Corr.	499**	058	159	.053	381*	372*
Equip.	Sig. (2-tailed)	.002	.752	.377	.757	.026	.025
Truck %	N	36	32	33	36	34	36
Logs	Pearson Corr.	.312	.067	.508**	.346*	.047	.067
Lumber Wood	Sig. (2-tailed)	.064	.716	.003	.038	.791	.698
Products Truck %	N	36	32	33	36	34	36

Table A-5, (cont'd)

			ne A-5. (c	ont u)			
	Pearson Corr.	650**	102	403*	192	156	577**
Machine Truck %	Sig. (2-tailed)	.000	.577	.020	.261	.378	.000
Truck %	N	36	32	33	36	34	36
Rubber	Pearson Corr.	592**	010	489**	481	079	483**
and Plastics	Sig. (2-tailed)	.000	.955	.004	.003	.659	.003
Truck %	N	36	32	33	36	34	36
Furn.	Pearson Corr.	499**	.220	036	024	.013	454**
and Fixtures	Sig. (2-tailed)	.002	.225	.843	.890	.944	.005
Truck %	N	36	32	33	36	34	36
Misc.	Pearson Corr.	496**	025	272	179	076	467**
Manufac Products	Sig. (2-tailed)	.002	.893	.125	.295	.667	.004
Truck %	N	36	32	33	36	34	36
Printed Matter Truck %	Pearson Corr.	519**	038	520**	414*	159	404*
	Sig. (2-tailed)	.001	.838	.002	.012	.370	.015
	N	36	32	33	36	34	36
Elect.	Pearson Corr.	504**	.005	399*	260	181	450**
Equip.	Sig. (2-tailed)	.002	.977	.021	.126	.307	.006
Truck %	N	36	32	33	36	34	36
Paper	Pearson Corr.	.213	.255	.550**	.515**	.130	.054
and Pulp Products	Sig. (2-tailed)	.211	.159	.001	.001	.465	.756
Truck %	N	36	32	33	36	34	36
	Pearson Corr.	580**	.039	206	321	.021	675**
Total Tons	Sig. (2-tailed)	.000	.834	.250	.057	.905	.000
TOHS	N	36	32	33	36	34	36

<sup>\*</sup>Indicates significance at the 0.05 level

<sup>\*\*</sup> Indicates significance at the 0.01 level

Table A-6. Pearson Correlation Coefficients for Predictor Variables (2 of 2)

Predict. Variable	Pearson Criteria	MDF 4-7	MDF 8-10	MDF 11-13	All Single ALS	All Tandem ALS	All Tridem ALS	All Quad ALS
Road	Pearson Corr.	.029	089	.124	.608**	081	.405*	.014
Class	Sig. (2-tailed)	.869	.590	.531	.000	.639	.017	.938
ļ	N	35	39	28	36	36	34	33
	Pearson Corr.	576**	168	481**	441**	194	436 <sup>*</sup>	072
Region	Sig. (2-tailed)	.000	.307	.009	.007	.256	.010	.691
	N	35	39	28	36	36	34	33
	Pearson Corr.	176	048	272	668**	.213	513**	.015
AADTT	Sig. (2-tailed)	.312	.774	.161	.000	.211	.002	.936
	N	35	39	28	36	36	34	33
	Pearson Corr.	108	042	.440*	.828**	214	.185	.168
VC 5 %	Sig. (2-tailed)	.538	.800	.019	.000	.209	.296	.349
	N	35	39	28	36	36	34	33
	Pearson Corr.	017	033	383*	838**	.264	338	166
VC 9%	Sig. (2-tailed)	.923	.840	.044	.000	.120	.051	.355
	N	35	39	28	36	36	34	33
Function	Pearson Corr.	504**	056	342	039	382*	069	.104
Class	Sig. (2-tailed)	.004	.749	.075	.820	.022	.700	.563
	N	31	35	28	36	36	34	33
Food	Pearson Corr.	239	304	377*	414*	.093	526**	.042
Products Truck %	Sig. (2-tailed)	.195	.076	.048	.012	.588	.001	.816
	N	31	35	28	36	36	34	33

Table A-6. (cont'd)

			140	E A-0. (C	one d)			1
Fabr. Metal	Pearson Corr.	214	339*	410 <sup>*</sup>	559**	072	387*	196
Products	Sig. (2- tailed)	.248	.046	.030	.000	.677	.024	.275
Truck %	N	31	35	28	36	36	34	33
Trans.	Pearson Corr.	.064	290	.085	426**	.001	307	034
Equip. Truck %	Sig. (2-tailed)	.733	.091	.668	.010	.995	.078	.853
	N	31	35	28	36	36	34	33
Logs Lumber	Pearson Corr.	.538**	.403*	.590**	.320	.288	.428*	.416*
and Wood Products	Sig. (2-tailed)	.002	.016	.001	.057	.089	.011	.016
Truck %	N	31	35	28	36	36	34	33
	Pearson Corr.	060	204	122	463**	.306	460**	.173
Machine Truck %	Sig. (2-tailed)	.749	.239	.536	.004	.069	.006	.336
	N	31	35	28	36	36	34	33
Rubber	Pearson Corr.	312	333	345	509**	027	408*	159
and Plastics Truck %	Sig. (2-tailed)	.088	.051	.072	.002	.878	.017	.378
Truck /0	N	31	35	28	36	36	34	33
Furn.	Pearson Corr.	.189	.070	063	470**	.263	306	.212
Fixtures Truck %	Sig. (2- tailed)	.309	.689	.748	.004	.121	.079	.236
Truck 70	N	31	35	28	36	36	34	33
Misc. Manufac	Pearson Corr.	071	372*	.016	310	.204	341*	.062
Products Truck %	Sig. (2- tailed)	.705	.028	.935	.066	.233	.049	.730
	N	31	35	28	36	36	34	33
Printed	Pearson Corr.	223	251	433*	343*	.008	465**	.100
Matter Truck %	Sig. (2- tailed)	.228	.145	.021	.041	.963	.006	.580
	N	31	35	28	36	36	34	33

Table A-6. (cont'd)

				10 11 0. (0	· · · · · · · · · · · · · · · · · · ·			
Elect.	Pearson Corr.	199	388*	195	373*	.071	282	134
Equip. Truck %	Sig. (2-tailed)	.284	.021	.319	.025	.680	.106	.456
	N	31	35	28	36	36	34	33
Paper	Pearson Corr.	.588**	.309	.629**	.158	.520**	.273	018
and Pulp Products Truck %	Sig. (2-tailed)	.000	.071	.000	.358	.001	.118	.921
1	N	31	35	28	36	36	34	33
Total	Pearson Corr.	.107	195	032	523**	.228	429*	.441*
Tons	Sig. (2-tailed)	.566	.262	.870	.001	.181	.011	.010
	N	31	35	28	36	36	34	33

<sup>\*</sup>Indicates significance at the 0.05 level

<sup>\*\*</sup> Indicates significance at the 0.01 level

Table A-7. Predictor Variable Values for All Sites (1 of 2)

							<u> </u>				
Site	Road	Road Class Code	Region	Reg. Code	Funct. Class *Based on TMG	Funct. Class Code	AADTT Value	Class 5%	Class 9%	Food Products Truck %	Fabricate d Metal Products Truck %
1459	SN	2	Superior	1	2	-	358	40.88	24.9	2.13	0.97
1529	SN	2	Superior	1	2	-	295	41.5	28.1	1.2	69.0
2029	SN	2	Superior	1			201	8.64	58.27		
2209	M	3	Superior	1			88	20.02	47.96		
2229	SN	2	Superior	1	2	_	436	27.52	45.19	1.75	1.12
4049	I	1	North	2	П	1	523	27.98	34.19	2.07	1.5
4129	SN	2	North	2	5	1	386	45.66	27.28	0.53	0.84
4149	I	1	North	2	-	1	699	41.62	29.62	2.2	2.08
4229	SN	2	Bay	3	2	1	151	32.69	28.9	0.12	2.13
4249	SO	2	Bay	3	2	1	326	45.07	21.05	99.0	0.87
5019	NS	2	University	4	12	2	833	23.6	49.27	0.95	0.5
5059	I	1	Grand	5	11	2	1425	21.36	52.41	4.54	5.59
5249	US	2	Grand	5	2	1	1222	35.36	43.74	2.6	1.93
5289	US	2	Grand	5	12	2	975	34.8	33.09	1.67	0.57
5299	I	1	Grand	5	1	1	2188	16.39	54.46	9.9	5.33
6019	M	3	Bay	3	2	1	112	60.79	10.22	1.1	0
6129	I	1	Bay	3	1	1	1548	20.23	50.52	2.47	1.68
6306	M	3	Bay	3	9	1	123	48.25	17.25	0.38	0.02
6369	I	1	Metro	9	1	1	1695	17.2	64	4.23	5.7
6429	I	1	Bay	3	1	1	846	30.61	35.14	1.31	1.22

Table A-7. (cont'd)

Г		г				Γ—																
ļ.	Fabr. Metal Products Truck %	7.81	1.3	5.93		4.81	4.89	3.82		0.44	5.12	7.47	2.18	5.52	2.12	4.11	6.5	7.26	4.26	4.64	2.12	
	Food Products Truck %	3.29	2.24	10.77		4.17	9.47	3.2		1.3	6.16	5.77	4.95	6.33	4.15	7.15	6.97	13.1	6.34	6.98	4.29	
	Class 9%	54.81	36.8	71.43	71.23	37.28	73.13	80.54	45.37	41.45	59.86	43.92	40.9	55.62	50.08	12.67	66.74	65	61.24	46.79	26.74	70.58
	Class 5%	15.81	24.23	10.93	6.26	43.69	13.75	9.14	26.53	26.66	17.23	27.49	22.57	19.34	23.46	70.23	12.53	17.14	11.75	23.51	47.7	5.97
our a)	AADTT Value	1452	668	3569	431	926	5435	3101	237	608	1809	412	2802	1895	1881	277	3171	2236	2781	3106	321	3050
Table A-7. (cont u)	Funct. Class Code	2	1	1		1	1	1		1	1	1	2	2	2	2	1	2	2	2	2	
1 61	Funct. Class (TMG)	11	5	1		2	1	1		5	1	2	11	11	12	14	5	11	11	11	14	
	Reg. Code	9	3	4	7	7	7	7	7	4	4	4	9	4	4	9	4	9	9	9	5	9
	Region	Metro	Bay	University	Southwest	Southwest	Southwest	Southwest	Southwest	University	University	University	Metro	University	University	Metro	University	Metro	Metro	Metro	Grand	Metro
	Road Class Code	1	2	1	3	2	1	1	2	2	1	2	1	1	2	2	2	1	1	1	3	-
	Road	I	SO	I	M	SN	I	I	NS	SO	I	NS	I	I	SN	COS	NS	I	I	I	M	I
	Site	6469	6419	7029	6902	7109	7159	7269	7329	8029	8049	8129	8209	8219	8229	8440	8729	8829	9189	6026	9759	6626

Table A-8. Predictor Variable Values for All Sites (2 of 2)

Total Tons	3146990	3158069			6307396	13597092	2894113	9347661	974087	1949968	4138620	8721490	9088585	7456050	18190390	82501	23171358	150056	13865399	15384190
Elect. Equip. Truck	0.7	0.54			0.53	0.41	0.14	0.39	0.03	0.03	0.36	1.76	0.58	80.0	8.0	0	0.38	0.03	0.71	0.21
Printed Matter Truck %	0.26	0.17			0.2	0.22	0.09	0.31	0.05	0.02	0.14	0.15	0.11	0.05	0.65	0	0.22	0.01	0.33	0.16
Misc. Manuf.Prod. Truck %	0.15	0.11			0.21	0.07	0.02	0.09	0.02	0.02	0.02	0.11	0.04	0.05	60.0	0	80.0	0.01	0.39	0.05
Furn. and Fixtures Truck %	1.52	0.93			0.87	1.26	0.17	1.35	0.01	0.01	0.53	0.99	0.45	0.02	1.83	0	0.57	0	1.81	89.0
Paper and Pulp Prod.	13.56	12.69			12.52	7.78	1.41	80.8	4.21	0.03	1.33	2.39	1.67	0.75	1.96	0.01	2.99	0.01	4.78	4.02
Rubber and Plastics Truck %	0.29	0.22			0.3	0.45	0.21	0.43	0.14	0.21	0.58	3.6	1.39	0.03	2.13	0.03	29.0	80.0	1.87	0.25
Mach. Truck %	1.69	1.1			1.79	89.0	0.15	0.46	80.0	0.04	0.2	1.17	29.0	0.33	2.19	0	0.22	0.01	2.98	0.24
Logs, Lumber Wood Prod. Truck %	12.83	7.89			17.33	16.72	11.22	12.28	8.8	9.6	7.59	5.3	15.88	3.4	2.92	0.93	6.2	0.25	3.95	7.48
Trans. Equip. Truck %	1.43	1.03			1.77	5.66	3.02	5.2	2.42	0.99	2.29	3.15	2.4	0.52	5.27	0.03	3.08	0	14.24	2.79
Site	1459	1529	2029	2209	2229	4049	4129	4149	4229	4249	5019	5059	5249	5289	5299	6019	6129	6309	6989	6459

Table A-8. (cont'd)

				-		,				
Site	Trans. Equip. Truck %	Logs, Lumber Wood Prod. Truck %	Mach. Truck %	Rubber and Plastics Truck %	Paper and Pulp Prod. Truck %	Furn. and Fixtures Truck %	Misc. Manuf.Prod. Truck %	Printed Matter Truck %	Elect. Equip. Truck	Total Tons
6469	15.88	2.53	1.65	2.2	6.0	6.0	0.61	0.54	2.27	8513307
6479	1.75	4.08	0.04	1.21	0.82	0.22	60.0	0.18	0.41	6216048
7029	66.6	2.8	4.02	4.66	3.08	1.43	1.43	0.77	3.51	56205672
6902										
7109	5.64	4.03	0.77	2.03	1.69	0.78	0.28	0.19	0.73	9705593
7159	8.42	2.67	3.49	4.07	2.65	1.2	1.26	0.64	2.74	68281346
7269	2.13	1.3	1.08	2	1.03	0.34	0.13	0.29	2.54	16366546
7329										
8029	0.37	3.6	0.05	0.92	96.0	0.07	0	0.35	0.14	2049416
8049	2.48	2.64	1.56	2.1	1.67	1.38	0.07	0.74	0.95	15409242
8129	2.01	3.37	1.23	3.67	1.5	0.77	0.33	0.88	4.32	3619224
8209	1.33	4.9	1.06	1.53	1.26	0.72	0.02	0.74	0.55	16018865
8219	5.69	2.61	1.6	1.98	1.7	1.41	90.0	0.75	96.0	15147592
8229	2.58	7.34	0.36	1.13	2.38	0.46	0.05	0.43	0.54	11413115
8440	2.95	1.88	1.43	1.88	1.24	0.03	0.27	9.0	1.86	343602
8729	3.54	2.2	2.16	2.08	3.02	1.48	0.23	0.77	1.42	22374002
8829	3.6	4.18	4.03	3.68	2.22	1.84	1.02	1.52	2.63	26902544
6816	2.4	0.94	2.91	1.44	1.4	0.61	0.32	0.28	1.58	11259455
9209	1.1	4.56	1.95	2.33	1.51	66.0	0.2	1.15	1.5	21160283
6576	2.2	1.98	89.0	2.1	1.02	1.01	0.04	0.25	0.23	9314743

**Appendix B**Analyses Results

Table B-1. Difference in AADTT between OWPM and Continuous Data

Site	AADTT	AADTT	Difference	Percentage
	(OWPM)	(Full)		Difference
1459	356.3	357.9	1.6	0.45
1529	271.4	294.7	23.3	7.91
2209*	84.3	88.4	4.1	4.64
2229	433.1	436.4	3.3	0.76
4049	504.6	522.9	18.3	3.50
4129	362	386.3	24.3	6.29
4149	595.1	669.2	74.1	11.07
4229	148.1	150.5	2.4	1.59
4249	318	325.7	7.7	2.36
5019	814.4	832.8	18.4	2.21
5059	1385.7	1425.1	39.4	2.76
5249	1205	1221.6	16.6	1.36
5289	946.5	974.6	28.1	2.88
5299	2075.4	2188.1	112.7	5.15
6019*	102.8	111.5	8.7	7.80
6129	1469.4	1547.9	78.5	5.07
6309	119.7	122.9	3.2	2.60
6369	1707.6	1695	-12.6	-0.74
6429	821.2	846.4	25.2	2.98
6479	869.1	899	29.9	3.33
7029	3534.9	3569.2	34.3	0.96
7109	890	976.1	86.1	8.82
7159	5331.9	5435.4	103.5	1.90
7269	3035.4	3100.6	65.2	2.10
8029	784.2	809.2	25	3.09
8049	1744.7	1809	64.3	3.55
8129	387.6	412.1	24.5	5.95
8209	2742	2802.1	60.1	2.14
8219	1830.3	1894.6	64.3	3.39
8229	1850	1881.4	31.4	1.67
8440	274.7	277.1	2.4	0.87
8729	3052.9	3171	118.1	3.72
8829	2185.2	2235.9	50.7	2.27
9189	2705.2	2780.7	75.5	2.72
9209	2992.2	3106	113.8	3.66
9759	317.2	321.2	4	1.25
9799*	3024.8	3049.8	25	0.82

<sup>\*</sup>Indicates data was not used in the statistical analyses

Table B-2. Difference in TTC between OWPM and Continuous Data

	VC	TTC	TTC	r
Site		TTC	TTC	Difference
1459	Category VC 11-13	(OWPM) 13.61	(Full) 13.55	0.06
1529	VC 11-13 VC 11-13			-0.06
		11.27	10.76	-0.52
2209*	VC 11-13	30.60	29.98	-0.63
2229	VC 11-13	9.44	9.40	-0.05
4049	VC 11-13	15.18	14.90	-0.28
4129	VC 11-13	8.15	8.10	-0.05
4149	VC 11-13	9.91	9.07	-0.84
4229	VC 11-13	13.50	13.36	-0.15
4249	VC 11-13	12.20	11.97	-0.23
5019	VC 11-13	7.96	7.94	-0.02
5059	VC 11-13	5.46	5.53	0.07
5249	VC 11-13	7.16	7.26	0.10
5289	VC 11-13	5.08	5.36	0.27
5299	VC 11-13	10.04	13.19	3.15
6019*	VC 11-13	75.10	76.05	0.96
6129	VC 11-13	11.92	12.03	0.11
6309	VC 11-13	7.02	7.65	0.63
6369	VC 11-13	5.58	5.53	-0.05
6429	VC 11-13	10.17	9.81	-0.36
6479	VC 11-13	13.02	13.14	0.11
7029	VC 11-13	5.15	5.15	0.00
7109	VC 11-13	4.49	4.34	-0.15
7159	VC 11-13	4.31	4.35	0.05
7269	VC 11-13	3.15	3.14	-0.01
8029	VC 11-13	6.89	7.06	0.17
8049	VC 11-13	6.02	6.04	0.02
8129	VC 11-13	10.60	10.60	0.00
8209	VC 11-13	16.22	15.32	-0.90
8219	VC 11-13	5.89	5.92	0.03
8229	VC 11-13	8.19	8.44	0.25
8440	VC 11-13	0.87	0.87	-0.01
8729	VC 11-13	9.13	8.93	-0.19
8829	VC 11-13	7.91	8.10	0.20
9189	VC 11-13	8.75	8.99	0.24
9209	VC 11-13	4.29	4.27	-0.02
9759	VC 11-13	1.86	2.21	0.35
9799*	VC 11-13	12.95	12.90	-0.05
1459	VC 4-7	51.08	51.47	0.39
1529	VC 4-7	49.96	52.09	2.12
2209*	VC 4-7	58.48	59.16	0.68
2229	VC 4-7	34.38	33.66	-0.72

Table B-2. (cont'd)

		le B-2. (cont	(a)	
Site	VC	TTC	TTC	Difference
	Category	(OWPM)	(Full)	
4049	VC 4-7	34.56	34.94	0.38
4129	VC 4-7	51.93	52.11	0.18
4149	VC 4-7	40.95	46.00	5.04
4229	VC 4-7	44.63	43.79	-0.84
4249	VC 4-7	52.80	53.05	0.26
5019	VC 4-7	28.93	29.29	0.36
5059	VC 4-7	32.89	32.81	-0.08
5249	VC 4-7	41.22	40.88	-0.34
5289	VC 4-7	45.20	45.32	0.12
5299	VC 4-7	22.11	21.34	-0.76
6019*	VC 4-7	20.23	19.19	-1.04
6129	VC 4-7	26.01	26.25	0.24
6309	VC 4-7	62.16	61.35	-0.80
6369	VC 4-7	22.08	20.50	-1.58
6429	VC 4-7	35.67	36.80	1.14
6479	VC 4-7	34.01	34.32	0.30
7029	VC 4-7	16.51	16.37	-0.14
7109	VC 4-7	46.82	50.22	3.40
7159	VC 4-7	17.73	17.28	-0.45
7269	VC 4-7	12.26	12.18	-0.07
8029	VC 4-7	32.56	33.07	0.51
8049	VC 4-7	22.34	22.50	0.17
8129	VC 4-7	33.95	35.02	1.06
8209	VC 4-7	28.70	29.04	0.34
8219	VC 4-7	24.51	25.19	0.68
8229	VC 4-7	32.04	31.63	-0.41
8440	VC 4-7	80.41	80.19	-0.23
8729	VC 4-7	16.77	16.88	0.11
8829	VC 4-7	23.10	22.78	-0.31
9189	VC 4-7	19.05	18.93	-0.12
9209	VC 4-7	35.11	35.51	0.39
9759	VC 4-7	63.75	63.73	-0.02
9799*	VC 4-7	80.71	80.72	0.01
1459	VC 8-10	35.31	34.98	-0.33
1529	VC 8-10	38.76	37.16	-1.61
2209*	VC 8-10	10.91	10.86	-0.05
2229	VC 8-10	56.18	56.94	0.77
4049	VC 8-10	50.26	50.16	-0.10
4129	VC 8-10	39.92	39.79	-0.13
4149	VC 8-10	49.13	44.93	-4.20
4229	VC 8-10	41.86	42.86	0.99
4249	VC 8-10	35.00	34.97	-0.03
T277	4 C 0-10	1 33.00	J7.71	-0.03

Table B-2. (cont'd)

Site	VC	TTC	TTC	
Site	~	1	110	Difference
L 1	Category	(OWPM)	(Full)	Difference
5019	VC 8-10	63.11	62.78	-0.34
5059	VC 8-10	61.65	61.66	0.01
5249	VC 8-10	51.62	51.86	0.24
5289	VC 8-10	49.72	49.32	-0.40
5299	VC 8-10	67.86	65.47	-2.39
6019*	VC 8-10	4.67	4.75	0.08
6129	VC 8-10	62.07	61.72	-0.35
6309	VC 8-10	30.83	31.00	0.17
6369	VC 8-10	72.34	73.97	1.64
6429	VC 8-10	54.16	53.39	-0.77
6479	VC 8-10	52.96	52.55	-0.42
7029	VC 8-10	78.35	78.48	0.14
7109	VC 8-10	48.69	45.44	-3.25
7159	VC 8-10	77.96	78.36	0.40
7269	VC 8-10	84.59	84.68	0.09
8029	VC 8-10	60.56	59.87	-0.68
8049	VC 8-10	71.64	71.45	-0.19
8129	VC 8-10	55.44	54.38	-1.06
8209	VC 8-10	55.08	55.64	0.56
8219	VC 8-10	69.60	68.89	-0.71
8229	VC 8-10	59.77	59.93	0.17
8440	VC 8-10	18.71	18.95	0.23
8729	VC 8-10	74.11	74.18	0.08
8829	VC 8-10	69.00	69.11	0.12
9189	VC 8-10	72.20	72.08	-0.12
9209	VC 8-10	60.60	60.22	-0.38
9759	VC 8-10	34.39	34.06	-0.33
9799*	VC 8-10	6.33	6.38	0.05

<sup>\*</sup>Indicates data was not used in the statistical analyses

Table B-3. Difference in MDF between OWPM and Continuous Data

	VC 4-7	VC 8-10	VC 11-13
Site	MDF	MDF	MDF
	Difference	Difference	Difference
1459	0.0697	0.0682	0.1134
1529	0.1341	0.0623	0.1104
2209*	0.1009	0.0797	0.1231
2229	0.0805	0.0651	0.1007
4049	0.1385	0.0602	0.0885
4129	0.1330	0.0820	0.1236
4149	0.4164	0.0699	0.1053
4229	0.1481	0.0874	0.0806
4249	0.0694	0.0673	0.1271
5019	0.0614	0.0482	0.1575
5059	0.0664	0.0693	0.0886
5249	0.1335	0.0557	0.2269
5289	0.0792	0.0637	0.1646
5299	0.0835	0.0719	0.2256
6019*	0.1088	0.1253	0.2078
6129	0.0587	0.0617	0.1043
6309	0.0986	0.1150	0.2860
6369	0.0832	0.0810	0.0844
6429	0.0877	0.0868	0.1224
6479	0.2177	0.0677	0.1424
7029	0.0915	0.0673	0.0903
7109	0.2239	0.0749	0.1101
7159	0.2586	0.0832	0.0998
7269	0.0651	0.0682	0.0820
8029	0.0856	0.0737	0.1322
8049	0.1053	0.1284	0.1549
8129	0.1254	0.1184	0.2056
8209	0.0882	0.0704	0.1415
8219	0.0830	0.0892	0.1247
8229	0.1304	0.0749	0.1008
8440	0.0788	0.0843	0.7386
8729	0.0566	0.0734	0.1047
8829	0.2180	0.0743	0.1209
9189	0.1310	0.0708	0.3796
9209	0.0798	0.0940	0.1519
9759	0.0841	0.0776	0.1090
9799*	0.0833	0.0903	0.1267
Indicates d	ata was not u	ead in the stat	

<sup>\*</sup>Indicates data was not used in the statistical analyses

Table B-4. Difference in HDF between OWPM and Continuous Data

Site	HDF
	Difference
1459	0.0831
1529	0.1190
2209*	0.1091
2229	0.0600
4049	0.0797
4129	0.0671
4149	0.1513
4229	0.0877
4249	0.0472
5019	0.0622
5059	0.0289
5249	0.0548
5289	0.0365
5299	0.0594
6019*	0.1543
6129	0.2012
6309	0.1051
6369	0.0639
6429	0.1429
6479	0.0391
7029	0.0232
7109	0.1127
7159	0.0259
7269	0.0232
8029	0.0376
8049	0.0415
8129	0.0562
8209	0.1318
8219	0.0554
8229	0.0396
8440	0.0776
8729	0.0337
8829	0.0321
9189	0.0257
9209	0.0263
9759	0.0813
9799*	0.0478
	. 1 . 41

<sup>\*</sup>Indicates data was not used in the statistical analyses

Table B-5. Difference in AGPV between OWPM and Continuous Data

	Quad	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	00.0	0.00	0.00	0.00	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ence	Trid.	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Difference	Tand.	-0.01	0.01	0.04	-0.01	0.00	-0.02	-0.02	-0.02	-0.01	0.01	0.00	0.05	0.01	0.00	0.08	0.00	-0.02	0.01	0.02	0.00	0.00	-0.01	0.01	-0.01	-0.03	0.01
	Sing.	0.01	-0.01	-0.04	0.01	0.00	0.02	0.02	0.02	0.01	-0.01	0.04	-0.05	-0.01	0.00	-0.08	0.00	0.02	-0.01	-0.02	0.00	0.00	0.01	-0.01	0.01	0.03	-0.01
	Quad	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
snon	Trid.	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Continuous	Tand.	0.63	0.72	0.52	0.72	0.51	19.0	0.38	0.38	0.45	0.36	0.32	0.33	0.26	0.33	0.59	0.32	0.59	0.24	0.40	0.24	0.35	0.29	0.24	0.61	0.34	0.21
	Sing.	1.37	1.28	1.48	1.28	1.49	1.33	1.62	1.62	1.55	1.64	1.72	1.67	1.74	1.67	1.41	1.68	1.41	1.76	1.60	1.76	1.65	1.71	1.76	1.39	1.66	1.79
	Quad	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PM	Trid.	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
OWPM	Tand.	0.64	0.71	0.48	0.73	0.51	69.0	0.40	0.40	0.46	0.35	0.32	0.28	0.25	0.33	0.51	0.32	0.61	0.23	0.38	0.24	0.35	0.30	0.23	0.62	0.37	0.20
	Sing.	1.36	1.29	1.52	1.27	1.49	1.31	1.60	1.60	1.54	1.65	1.68	1.72	1.75	1.67	1.49	1.68	1.39	1.77	1.62	1.76	1.65	1.70	1.77	1.38	1.63	1.80
Truck	Class	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
	)   	1459	1529	2229	4049	4129	4149	4229	4249	5019	5059	5249	5289	5299	6129	6309	6989	6459	*6949	6479	7029	7109	7159	7269	8029	8049	8129

0.00 80000 0.02 0.01 0.00 0.00 0.01 0.00 0.01 0.01 -0.02 0.00 0.01 0.00 Fable B-5. (cont'd) 0.20 0.05 0.03 0.07 0.09 0.10  $\frac{0.21}{0.23}$ 0.19 0.13 0.12 0.06 0.03 0.05 90.0 0.08 0.06 0.03 0.11 0.01 0.21 1.78 1.83 1.79 1.88 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 1.87 1.80 2.01 2.00 2.00 2.00 2.00 2.01 2.01 1.81 2.01 2.01 0.00 0.00 0.00 0.00 0.00 00.00 0.00 0.0 0.08 0.00 0.05 0.19 0.05 0.08 0.23 0.13 0.12 0.20 0.03 0.05 0.03 0.01 0.04 0.07 0.02 0.05 0.03 0.11 1.78 1.88 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 1.81 1.87 2.01 2.00 2.01 2.01 4 4 4 4 4 4 4 4 4 5 5 5 S 2 2 2 2 5 5 S 5 2 5 2 2 2 2 4049 6469\* 9209 1459 1529 2229 4129 4229 4249 5019 5059 5249 6309 6369 8219 8229 8440 8729 8829 6816 9759 4149 5289 5299 6129 6429 6479 7029

0.00 00.00 -0.01 0.00 
 Fable B-5. (cont'd)
 0.03 0.04 0.02 0.02 0.01 1.00 0.04 1.00 2.00 2.00 2.00 1.00 1.00 2.00 2.00 1.00 1.00 1.00 0.00 0.00 0.00 0 0.00 0.03 0.04 0.02 0.04 0.06 0.03 0.02 0.04 1.00 1.00 1.00 1.00 00.11.0 1.00 1.00 0.01 0.01 2.00 2.00 1.00 00 1.01 2 2 9 9 9 9 9 واو 2 2 9 8229 8829 9189 9209 9759 1459 8029 8049 8129 8219 8440 8729 1529 2229 4149 4249 5019 5059 8209 4049 4129 4229 5249 5289 5299 6129 7159

-0.08 -0.0300.00 0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01 0.09 0.01 -0.0400.00 0 0.02 0.00 0.00 0.00 0.00 0.00 0.00 0.08 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 -0.01 0.01 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 -0.01 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.56 0.43 0.00 0.00 0.63 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.36 0.38 0.55 [able B-5. (cont'd) 0.15 0.02 0.03 0.02 0.01 1.03 1.05 1.03 1.02 1.01 1.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.55 99.0 0.30 0.40 0.60 0.00 0. 0.00 0.00 0.43 0.39 0.59 0.00 0.00 0.34 0.66 0.75 0.75 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 0.02 0.01 0.01 0.01 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 00.1 1.00 1.00 1.00 1.00 1.04 8 1.00 1.04 1.01 1.01 1.01 ७।७।७। 9 9 00000000 7 **I** \_ 1 6469\* 8219 6429 6479 7029 7159 7269 8029 8049 8129 8209 8229 8440 8729 8829 6816 9209 9759 1459 1529 2229 4049 4229 4149

-0.08 -0.05 0.02 -0.01 0.00 0.00 0.04 0.03 0.08 0.05 90.0 0.03 0.00 0.00 0.00 0.00 0.00 -0.01 -0.01 -0.01 0.01 0.01 0.01 -0.05 -0.02 -0.06 -0.02 -0.04 -0.01 0.00 0.08 0.00 0.00 0.00 -0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.02 0.00 90.0 0.01 0.00 -0.01 0.00 0.01 0.02 -0.03-0.03 -0.030.00 0.00 0.00 -0.01 -0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.0 0.02 0.01 0.01 -0.01 0.01 -0.02-0.03 -0.02 -0.03 -0.02-0.02 -0.01 -0.01 -0.01 0.00 0.00 0.00 -0.01 0.01 0.02 0.01 0.01 0.00 0.00 0.00 0.00 0.00 -0.01 0.01 0.01 0.01 0.43 0.40 0.32 0.36 0.22 0.46 0.31 0.36 0.15 0.26 0.52 0.31 0.30 0.48 0.37 0.38 0.23 0.48 0.27 0.27 0.59 0.00 0.31 0.31 0.41 0.63 0.46 0.58 0.55 0.63 0.63 0.63 0.65 0.45 0.50 0.72 0.68 0.61 0.64 0.62 0.67 0.55 0.58 0.69 0.49 0.00 0.57 0.00 0.71 B-5. (cont'd) 0.05 0.08 0.06 0.05 0.02 0.09 0.03 0.03 0.02 0.05 0.13 0.03 0.03 0.09 0.07 0.04 0.02 0.02 0.01 0.01 0.1 Table ] 1.05 1.02 1.09 1.09 1.03 1.05 1.10 1.08 1.06 1.03 1.08 1.02 1.05 1.13 1.03 1.03 1.02 2.50 1.25 1.04 1.01 1.01 1.07 1.01 0.36 0.32 0.37 0.20 0.35 0.47 0.36 0.20 0.39 0.36 0.14 0.22 0.49 0.23 0.28 0.42 0.38  $\begin{array}{c} 0.22 \\ 0.27 \end{array}$ 0.48 0.28 0.53 0.00 0.37 0.27 0.41 0.63 0.63 0.68 0.52 0.57 69.0 0.56 0.62 0.63 0.47 0.72 0.67 0.65 0.54 0.56 0.73 0.58 0.57 0.49 0.45 0.00 0.00 0.05 0.02 0.08 0.05 0.05 0.05 0.05 0.48 0.10 0.12 0.04 0.15 0.03 0.10 0.0 0.07 0.04 0.07 0.07 0.04 0.03 0.02 0.01 0.01 0.51 1.05 1.01 1.24 1.00 1.10 1.05 1.02 1.08 1.08 1.04 1.05 1.05 1.05 1.07 1.12 1.07 1.04 1.03 1.03 2.51 2.54 1.01 ∞l / 1-1-~ -1 1 1 ~ 1 ~ 1 1 1 ~ 1 \_  $\infty$ \*6949 7109 1529 5019 5059 5249 5289 5299 6129 6309 6369 6429 6479 7029 7159 7269 8029 8049 8129 8209 8219 8229 8440 8729 8829 9189 9209 9759 1459

0.00 00.00 0.00 0.00 0.01 0.00 0.00 0.00 -0.01 0.00 0.01 0.00 0.01 0.01 0.01 0.00 0.00 -0.140.01 0.00 0.00 0.00 -0.01 0.01 -0.01 0.00 0.00 -0.01 0.00 Table B-5. (cont'd) 0.89 0.69 0.82 0.82 0.76 0.67 0.83 0.78 0.78 0.88 0.91 0.80 0.84 0.75 0.86 0.69 0.61 0.58 0.75 0.73 0.67 0.69 2.19 2.26 2.45 2.13 2.25 2.37 2.32 2.41 2.27 2.27 2.28 2.28 2.14 2.21 2.35 2.40 2.10 2.22 0.00 0.67 0.89 0.76 0.69 0.69 0.76 0.67 0.84 0.82 0.72 69.0 0.78 0.87 0.81 0.84 0.78 0.86 69.0 0.81 2.12 2.25 2.35 2.35 2.19 2.25 2.41 2.20 2.29 2.42 2.42 2.25 2.34 2.14 2.20 2.23 2.41 2.17 2.11  $\infty |\infty| \infty |\infty| \| \times |\infty| \| \times |\infty| \times |$ ∞  $\infty$ 4049 4229 4249 5019 5059 5249 5289 5299 6129 6369 469\* 6479 7029 7269 8029 8049 8129 8209 8219 8729 4129 4149 7109 7159 8229 8440

1	·····									1									1										$\neg$
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.01	00.0	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0.00	0.00	0.00	0.00	0.00	0.00	-0.01	0.00	0.00	0.01	-0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
	0.00	0.00	-0.01	0.00	0.01	0.00	0.02	0.01	0.00	-0.01	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	-0.01	0.00	-0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Table B-5. (cont'd)	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0.79	08.0	0.78	0.77	1.71	1.71	1.79	1.75	1.76	1.78	1.87	1.70	1.85	1.87	1.88	1.88	1.90	1.85	1.81	1.88	1.78	1.91	1.88	1.89	1.87	1.91	1.89	1.84	1.88
	2.22	2.22	2.23	2.24	1.56	1.55	1.41	1.48	1.44	1.43	1.24	1.56	1.28	1.25	1.23	1.22	1.20	1.29	1.34	1.24	1.42	1.17	1.23	1.21	1.26	1.18	1.22	1.32	1.23
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	00.00
	0.00	0.00	00.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	00.0
	0.79	08.0	0.78	0.77	1.71	1.71	1.80	1.75	1.76	1.77	1.88	1.70	1.85	1.87	1.88	1.88	1.90	1.85	1.82	1.87	1.77	1.91	1.88	1.89	1.87	1.91	1.89	1.83	1.88
	2.22	2.22	2.24	2.24	1.55	1.55	1.39	1.47	1.44	1.44	1.22	1.56	1.28	1.25	1.23	1.22	1.20	1.28	1.32	1.25	1.42	1.18	1.22	1.21	1.26	1.18	1.22	1.32	1.23
	8	8	8	8	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	8829	6816	9209	9759	1459	1529	2229	4049	4129	4149	4229	4249	5019	5059	5249	5289	5299	6129	6309	6969	6459	*6949	6479	7029	7109	7159	7269	8029	8049

-0.02 -0.02 -0.02-0.02-0.08 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.02 0.00 0.01 0.00 0.00 0.00 0.00 -0.01 0.01 0.01 0.01 -0.02 -0.02 -0.03 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.03 0.00 0.03 0.04 0.00 0.01 -0.01 0.01 0.01 0.01 0.01 -0.02 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0 0.00 0.00 0.01 0.00 0.00 0.04 -0.01-0.02 0.02 -0.01 0.08 0.00 0.00 0.00 0.00 0.00 0.00 0.00 -0.01 0.00 -0.01 -0.01 0.00 -0.010.00 -0.01 0.01 0.01 0.01 0.01 0.00 0.00 0.00 0.00 0.59 0.66 0.47 0.65 0.63 0.40 0.74 0.52 0.28 0.00 0.00 0.00 0.59 0.53 0.67 0.00 0.31 0.30 0.32 0.28 0.00 0.00 0.00 0.00 0.00 0.40 0.24 0.23 0.22 0.47 0.29 0.22 0.28 69.0 0.01 0.00 0.00 0.01 0.31 0.61 0.21 Table B-5. (cont'd) 1.90 1.90 1.89 1.89 1.90 1.92 1.06 1.03 1.84 1.00 1.00 1.01 1.00 0.90 1.00 1.03 1.02 1.00 1.00 0.99 1.01 1.01 1.26 1.30 1.20 1.20 1.23 1.19 1.28 1.20 1.16 1.15 1.47 1.27 1.64 1.68 1.53 1.90 1.47 1.25 1.80 1.79 1.64 1.44 1.28 1.61 1.41 0.65 0.49 0.58 0.55 0.53 0.56 99.0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.64 99.0 0.62 0.42 0.53 0.53 0.61 0.77 0.21 0.00 0.29 0.39 0.29 69.0 0.28 0.00 0.00 0.00 0.28 0.23 0.26 0.34 0.19 0.00 0.00 0.00 0.44 0.22 0.63 0.27 0.01 0.31 1.90 1.88 1.90 1.86 1.89 1.90 1.92 1.92 1.00 0.99 1.00 1.01 1.02 1.00 1.84 0.90 1.03 1.03 0.90 1.01 1.00 1.01 1.01  $\frac{1.26}{1.52}$ 1.19 1.16 1.15 1.45 1.28 1.64 1.28 1.20 1.20 1.22 1.60 1.53 1.47 1.60 1.26 1.81 1.40 1.65 1.43 01010101 10 10 10 10 10 10 6 0 0 9 6 00 6 6 6 6469\* 9189 4049 4129 5019 5249 8209 8729 8829 9209 1459 1529 2229 4149 4249 5059 5289 6129 6429 6479 8219 8229 8440 9759 4229 5299 6309 6989

Table B-5. (cont'd)

																				1								
-0.01	-0.02	-0.01	0.00	-0.02	-0.01	0.00	0.00	0.01	0.00	0.03	0.00	-0.01	00.00	-0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.01	0.03	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	-0.04	00.0	0.00	00.0	0.01	0.00	0.00	0.00	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	0.00	0.01	0.00	0.00	0.00	0.00	-0.01	0.00	0.00	0.01	0.01	0.01	0.00	0.00	-0.01	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00
-0.01	-0.03	-0.01	-0.01	0.00	0.02	-0.01	0.00	0.01	0.01	0.01	0.00	-0.02	0.00	0.01	-0.01	0.00	0.00	0.01	-0.01	-0.02	0.00	0.00	0.01	-0.01	0.00	-0.01	0.00	-0.01
0.56	0.56	0.44	0.09	0.73	0.55	0.57	09.0	0.51	09.0	0.45	0.43	0.72	0.62	09.0	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.27	0.30	0.36	0.63	0.18	0.23	0.35	0.28	0.24	0.32	0.49	0.35	0.25	0.34	0.34	0.27	00.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	00.0
1.05	1.01	1.06	1.08	86.0	1.00	0.99	0.94	1.01	0.99	86.0	1.02	0.94	0.95	0.97	1.03	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.02	0.00	0.00	0.01	0.00	0.00
1.51	1.61	1.57	1.72	1.62	1.80	1.32	1.61	1.90	1.52	1.37	1.69	1.37	1.37	1.52	1.77	5.00	5.00	5.00	4.99	4.97	5.00	5.00	4.97	4.99	5.00	5.00	5.00	4.99
0.57	0.58	0.45	0.09	0.75	0.56	0.57	09.0	0.50	09.0	0.42	0.43	0.73	0.62	0.61	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	00.00
0.26	0.27	0.36	0.62	0.17	0.22	0.35	0.28	0.24	0.32	0.53	0.35	0.25	0.34	0.33	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1.05	1.01	1.05	1.08	86.0	1.00	0.99	0.95	1.01	0.99	86.0	1.01	0.93	0.95	0.97	1.04	0.00	00.0	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00
1.52	1.64	1.58	1.73	1.62	1.78	1.33	1.61	1.89	1.51	1.37	1.69	1.39	1.37	1.51	1.78	5.00	5.00	4.99	5.00	4.99	5.00	5.00	4.96	5.00	5.00	5.01	5.00	5.00
10	10	01	01	01	10	01	10	10	10	10	10	10	10	10	10	11	11	11	11	11	11	11	11	11	11	11	11	11
7029	7109	7159	7269	8029	8049	8129	8209	8219	8229	8440	8729	8829	9189	9209	9759	1459	1529	2229	4049	4129	4149	4229	4249	5019	5059	5249	5289	5299

0.00 00:00 0.00 0.00 0.00 0.00 0.00 0.00 0.07 0.00 -0.040.00 0.00 0.00 0.01 -0.14 -0.08 -0.03 0.00 0.00 0.00 0.00 0.00 0.00 -0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.09 0.00 0.00 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 Fable B-5. (cont'd) 0.00 0.00 0.00 0.00 0.00 1.00 0.00 0.00 0.00 0.00 1.00 1.57 1.00 1.00 4.88 2.86 5.00 5.00 4.99 5.00 5.00 5.00 5.00 5.00 5.00 5.00 5.00 3.86 4.00 4.00 4.00 5.00 5.00 4.99 5.00 5.00 5.00 5.00 5.00 3.92 4.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0 0.00 1.08 1.00 1.00 1.00 0.00 0.00 1.61 5.00 5.00 5.00 5.00 5.00 5.00 5.00 4.99 5.00 5.00 5.00 5.00 5.00 4.00 5.00 5.00 4.99 5.00 4.00 4.00 4.91 2.77 12 | 12 | 12 2 2 2 2 П 11 1 11  $\Box$ \*6949 8129 7109 7159 7269 8029 8049 8209 8219 8229 8729 8829 9759 2229 6309 6369 6429 6479 7029 8440 9189 9209 1459 1529 4049 4129 4149 4229

0.00 -0.010.00 0.00 0.00 0.00 0.00 0.00 -0.010.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 -0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01 -0.02 -0.03 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 -0.01 0.00 0.00 0.00 0.00 0.01 0.01 0.00 0.00 0.05 0.05 00.00 00.00 00.00 00.00 00.00 0000 0000 0000 0000 0000 0.00 Table B-5. (cont'd) 1.00 1.00 1.00 0.89 0.00 0. 1.00 1.29 1.01 1.01 4.00 3.98 4.00 3.99 4.00 0.00 4.00 4.00 4.00 4.00 4.00 4.00 4.00 3.98 4.00 4.00 3.99 4.00 4.00 4.00 4.00 2.35 3.97 4.00 00.00 0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.54 0.00 0.49 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01 1.00 96.0 1.00 00.1 1.00 00.1 1.00 00.1 1.00 .29 8. 1.00 0.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.01 4.00 4.00 3.99 4.20 4.00 4.00 0.00 3.99 4.00 4.00 4.00 4.00 4.00 4.00 4.00 4.00 4.00 4.00 2.34 2|2|2|2|2|2 12 2 2 2 2 **6469**\* 6369 6429 6479 7029 7109 8209 5019 5059 5249 5289 5299 6129 6306 7159 7269 8029 8049 8129 8219 8229 8440 8729 8829 9189 9209 9759 1459

	-0.02	0.02	0.05	0.01	0.02	-0.01	-0.01	0.02	0.00	0.01	0.01	0.05	0.00	0.02	0.00	0.00	-0.01	0.01	0.01	0.00	0.01	0.00	-0.01	0.02	0.02	0.00	0.02	0.00	0.14
	0.05	-0.02	0.01	-0.01	-0.02	-0.01	0.01	-0.02	-0.01	0.00	-0.01	-0.05	-0.01	0.04	0.02	0.00	0.00	0.00	0.01	0.00	-0.01	0.01	-0.02	0.00	-0.04	-0.01	0.01	0.00	-0.01
	0.02	-0.02	0.00	-0.02	-0.02	0.01	0.02	-0.02	0.00	0.01	0.00	-0.21	0.00	-0.05	0.00	0.00	0.03	-0.01	0.01	0.01	0.00	0.02	0.03	-0.02	0.02	-0.02	0.00	0.00	-0.29
	-0.03	0.01	-0.29	0.04	0.01	0.01	-0.03	-0.01	0.02	-0.02	0.01	-0.32	0.10	-0.02	-0.03	-0.01	0.01	0.00	-0.09	0.01	-0.02	0.01	0.03	0.02	0.03	0.03	0.01	0.01	-0.15
	0.28	0.38	0.47	0.54	0.64	19.0	0.64	0.55	9.02	0.83	9.65	0.92	0.53	69.0	0.43	0.57	0.58	89.0	0.62	0.45	0.57	0.28	0.70	0.61	0.71	98.0	99.0	65.0	0.86
1)	0.54	0.49	0.42	0.52	0.38	0.21	0.32	0.45	0:30	0.27	0.36	60.0	0.38	0.50	0.55	0.37	0.43	0.33	0.24	0.41	0.29	0.56	0.28	0:30	0.32	0.27	0.32	0.37	0.27
Table B-5. (cont'd)	1.63	1.52	1.42	1.60	1.42	1.61	1.64	1.58	1.52	0.91	1.48	0.38	1.53	1.37	1.38	1.57	1.24	1.54	1.47	1.81	1.53	1.57	1.38	1.49	1.59	1.10	1.43	1.55	1.02
Table B	1.99	2.08	2.78	1.88	5.09	2.13	1.85	2.10	2.01	1.59	1.67	0.57	2.35	1.61	2.52	1.97	2.44	1.74	2.88	2.03	2.90	2.35	2.10	2.16	2.05	1.50	2.00	2.20	1.41
	0.30	0.36	0.42	0.53	0.62	89.0	0.65	0.53	0.65	0.82	0.64	0.87	0.53	0.61	0.43	0.57	0.59	19.0	0.61	0.45	0.56	0.28	0.71	0.59	69.0	98.0	0.64	0.59	0.72
	0.52	0.51	0.41	0.53	0.40	0.22	0.31	0.47	0.31	0.27	0.37	0.14	0.39	0.46	0.53	0.37	0.43	0.33	0.23	0.41	0:30	0.55	0:30	0:30	0.36	0.28	0.31	0.37	0.27
	1.61	1.54	1.42	1.62	1.44	1.60	1.62	1.60	1.52	06.0	1.48	0.59	1.53	1.42	1.38	1.57	1.21	1.55	1.46	1.80	1.53	1.55	1.35	1.51	1.57	1.12	1.43	1.55	1.31
	2.02	2.07	3.07	1.84	2.08	2.12	1.88	2.11	1.99	1.61	1.66	68.0	2.25	1.63	2.55	1.98	2.43	1.74	2.97	2.02	2.92	2.34	2.07	2.14	2.02	1.47	1.99	2.19	1.55
	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13
	1529	2229	4049	4129	4149	4229	4249	5019	5059	5249	5289	5299	6129	6306	6989	6459	6469*	6479	7029	7109	7159	7269	8029	8049	8129	8209	8219	8229	8440

Table B-5. (cont'd)           9         0.26         0.68         1.97         1.24         0.26         0.67         -0.01         0.05         0.00         -0.01           1         0.22         0.76         -0.06         -0.01         0.00         -0.01           2         0.31         0.79         0.76         -0.01         0.00         0.00           3         0.27         1.71         1.24         0.31         0.79         0.00         -0.01         0.00           4         0.27         0.77         1.68         1.27         0.26         0.78         -0.02         0.00         -0.01         0.01           9         0.36         0.57         1.97         1.56         0.35         0.60         -0.03         -0.03         -0.01         0.03
Table B-5. (cont'd)           0.26         0.68         1.97         1.24         0.26         0.67         -0.01         0.05           0.22         0.76         2.16         1.30         0.22         0.76         -0.06         -0.01           0.31         0.79         1.71         1.24         0.31         0.79         0.00         -0.01           0.27         0.77         1.68         1.27         0.26         0.78         -0.02         0.00           0.36         0.57         1.97         1.56         0.35         0.60         -0.03         -0.03
Table B-5. (cont'd)         0.26       0.68       1.97       1.24       0.26       0.67       -0.01         0.22       0.76       2.16       1.30       0.22       0.76       -0.06         0.31       0.79       1.71       1.24       0.31       0.79       0.00         0.27       0.77       1.68       1.27       0.26       0.78       -0.02         0.36       0.57       1.97       1.56       0.35       0.60       -0.03
Table B-5. (cont'd)         0.26       0.68       1.97       1.24       0.26       0.67         0.22       0.76       2.16       1.30       0.22       0.76         0.31       0.79       1.71       1.24       0.31       0.79         0.27       0.77       1.68       1.27       0.26       0.78         0.36       0.57       1.97       1.56       0.35       0.60
Table B-5. (cont'd)         0.26       0.68       1.97       1.24       0.26         0.22       0.76       2.16       1.30       0.22         0.31       0.79       1.71       1.24       0.31         0.27       0.77       1.68       1.27       0.26         0.36       0.57       1.97       1.56       0.35
Table B-5. (cont'd)       0.26     0.68     1.97     1.24       0.22     0.76     2.16     1.30       0.31     0.79     1.71     1.24       0.27     0.77     1.68     1.27       0.36     0.57     1.97     1.56
Table B-5. (cont       0.26     0.68     1.97     1.24       0.22     0.76     2.16     1.30       0.31     0.79     1.71     1.24       0.27     0.77     1.68     1.27       0.36     0.57     1.97     1.56
0.26     0.68       0.22     0.76       0.31     0.79       0.27     0.77       0.36     0.57
0.26 0.22 0.31 0.27 0.36
1.19 1.31 1.25 1.27 1.59
1.98 2.22 1.71 1.70 2.00
13 13 13 13 13
8729 8829 9189 9209 9759

\*Indicates data was not used in the statistical analyses

Table B-6. Difference in Average Axle Load between OWPM and Continuous Data

Site	Vehicle	Axle	OWPM	Continuous	Difference	Percent
	Class	Туре	Load	Load		Difference
1459	5	Single	6939.64	6980.13	40.49	0.580
1529	5	Single	7682.85	7716.43	33.58	0.435
2229	5	Single	6990.02	6982.93	-7.08	-0.101
4049	5	Single	7696.80	7613.54	-83.26	-1.094
4129	5	Single	6284.20	6251.69	-32.51	-0.520
4149	5	Single	7395.43	7361.79	-33.64	-0.457
4229	5	Single	8587.01	8884.02	297.01	3.343
4249	5	Single	6578.41	6565.58	-12.83	-0.195
5019	5	Single	7229.61	7223.57	-6.04	-0.084
5059	5	Single	7945.23	7974.80	29.57	0.371
5249	5	Single	8132.68	8407.24	274.57	3.266
5289	5	Single	7222.63	7228.43	5.79	0.080
5299	5	Single	7680.70	7728.21	47.51	0.615
6129	5	Single	7898.58	7832.64	-65.94	-0.842
6309	5	Single	8478.08	8452.25	-25.82	-0.306
6369	5	Single	6700.49	6670.56	-29.93	-0.449
6429	5	Single	7251.92	7233.41	-18.51	-0.256
6469*	5	Single	7655.85	7630.93	-24.92	-0.327
6479	5	Single	8234.65	8182.53	-52.12	-0.637
7029	5	Single	7529.22	7489.05	-40.17	-0.536
7109	5	Single	7142.63	7036.93	-105.69	-1.502
7159	5	Single	8416.23	8391.68	-24.55	-0.293
7269	5	Single	8248.19	8227.67	-20.52	-0.249
8029	5	Single	7928.51	7832.84	-95.67	-1.221
8049	5	Single	9405.26	8642.41	-762.85	-8.827
8129	5	Single	7562.60	7536.66	-25.94	-0.344
8209	5	Single	8344.43	8362.03	17.60	0.210
8219	5	Single	8095.19	8119.13	23.94	0.295
8229	5	Single	8014.27	7992.92	-21.35	-0.267
8440	5	Single	7465.98	7477.83	11.85	0.158
8729	5	Single	7590.47	7633.83	43.36	0.568
8829	5	Single	8303.73	8367.05	63.33	0.757
9189	5	Single	8212.15	8223.44	11.29	0.137
9209	5	Single	8371.61	8316.27	-55.34	-0.665
9759	5	Single	7551.40	7624.53	73.13	0.959
1459	5	Tandem	8441.87	8479.85	37.98	0.448
1529	5	Tandem	7363.93	7493.52	129.58	1.729
2229	5	Tandem	8039.70	8058.67	18.97	0.235
4049	5	Tandem	8239.53	8324.15	84.62	1.017
4129	5	Tandem	8415.00	8356.80	-58.20	-0.696

	T		Table D-0.		[ · · · · · · · · · · · · · · · · · · ·	
g:	Vehicle	Axle	OWPM	Continuous	D: cc	Percent
Site	Class	Type	Load	Load	Difference	Difference
4140		T 1	7547.05	7510.22	20.62	0.201
4149	5	Tandem	7547.95	7519.32	-28.63	-0.381
4229	5	Tandem	7506.75	7653.13	146.38	1.913
4249	5	Tandem	8289.03	8435.53	146.50	1.737
5019	5	Tandem	8514.80	8456.53	-58.27	-0.689
5059	5	Tandem	8846.08	8949.62	103.53	1.157
5249	5	Tandem	9345.80	9689.57	343.77	3.548
5289	5	Tandem	8871.67	8888.63	16.97	0.191
5299	5	Tandem	8463.53	8511.55	48.02	0.564
6129	5	Tandem	8824.60	8813.90	-10.70	-0.121
6309	5	Tandem	8562.35	8241.57	-320.78	-3.892
6369	5	Tandem	6853.95	6916.10	62.15	0.899
6429	5	Tandem	8842.40	8787.13	-55.27	-0.629
6469*	5	Tandem	8443.75	8456.32	12.57	0.149
6479	5	Tandem	8010.30	7970.08	-40.22	-0.505
7029	5	Tandem	8578.63	8670.72	92.08	1.062
7109	5	Tandem	6862.25	6851.22	-11.03	-0.161
7159	5	Tandem	7349.95	7413.28	63.33	0.854
7269	5	Tandem	7775.58	7737.73	-37.85	-0.489
8029	5	Tandem	7838.63	7823.23	-15.40	-0.197
8049	5	Tandem	7816.75	7742.33	-74.42	-0.961
8129	5	Tandem	8613.83	8768.67	154.83	1.766
8209	5	Tandem	7252.50	7297.88	45.38	0.622
8219	5	Tandem	8690.72	8657.17	-33.55	-0.388
8229	5	Tandem	7732.93	7742.57	9.63	0.124
8440	5	Tandem	8076.48	7850.20	-226.28	-2.883
8729	5	Tandem	8060.58	8037.97	-22.62	-0.281
8829	5	Tandem	6916.33	6899.08	-17.25	-0.250
9189	5	Tandem	7704.32	7633.28	-71.03	-0.931
9209	5	Tandem	8299.07	8255.35	-43.72	-0.530
9759	5	Tandem	8682.63	8692.48	9.85	0.113
1459	9	Single	11861.28	11824.33	-36.94	-0.312
1529	9	Single	11528.73	11463.48	-65.26	-0.569
2229	9	Single	11543.17	11492.34	-50.83	-0.442
4049	9	Single	10858.35	10818.63	-39.72	-0.367
4129	9	Single	10752.44	10737.13	-15.32	-0.143
4149	9	Single	10337.52	10309.40	-28.12	-0.273
4229	9	Single	10481.22	10564.59	83.38	0.789
4249	9	Single	10270.69	10305.61	34.92	0.339
5019	9	Single	10790.16	10809.62	19.46	0.180
5059	9	Single	11175.69	11145.80	-29.89	-0.268
5249	9	Single	10562.96	10474.43	-88.53	-0.845
347		Jingic	10302.30	107/4.43	-00.33	-0.043

Site         Vehicle Class         Axle Type         OWPM Load         Continuous Load         Difference         Percent Difference           5289         9         Single         10450.68         10478.43         27.75         0.265           5299         9         Single         11024.68         11099.17         74.48         0.671           6129         9         Single         110606.37         10514.86         -91.51         -0.870           6369         9         Single         11308.25         11235.00         -73.25         -0.652           6429         9         Single         11438.84         11474.27         35.42         0.309           6469*         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         1571.02         10656.69         85.68         0.804           7029         9         Single         1701.97         11638.58         -63.38         -0.545           7109         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         11021.34         11204.79         -18.62         0.149	· · · · · · · · · · · · · · · · · · ·	1		Table B-o.	(cont u)	T	
Class   Type	Site	1	Axle	OWPM	Continuous	Difference	Percent
5299         9         Single         11024.68         11099.17         74.48         0.671           6129         9         Single         11044.71         11083.61         38.90         0.351           6309         9         Single         10606.37         10514.86         -91.51         -0.870           6369         9         Single         11308.25         11235.00         -73.25         -0.652           6429         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         11701.97         11638.58         -63.38         -0.545           7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         110821.30         10899.72         78.42         0.719           7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029 <td>Site</td> <td>Class</td> <td>Туре</td> <td>Load</td> <td>Load</td> <td>Difference</td> <td>Difference</td>	Site	Class	Туре	Load	Load	Difference	Difference
6129         9         Single         11044.71         11083.61         38.90         0.351           6309         9         Single         10606.37         10514.86         -91.51         -0.870           6369         9         Single         11308.25         11235.00         -73.25         -0.652           6429         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         11071.97         11638.58         -63.38         -0.545           7109         9         Single         1109.7         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11021.44         1120.479         -18.62         -0.166           7269         9         Single         1040.23         10396.68         -3.55         -0.034           8029	5289	9	Single	10450.68	10478.43	27.75	0.265
6309         9         Single         10606.37         10514.86         -91.51         -0.870           6369         9         Single         11308.25         11235.00         -73.25         -0.652           6429         9         Single         11308.25         11235.00         -73.25         -0.652           6469*         9         Single         11200.32         11231.28         30.96         0.276           6469*         9         Single         110571.02         10656.69         85.68         0.804           7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11821.30         10899.72         78.42         0.719           7159         9         Single         11821.30         10899.72         78.42         0.719           7159         9         Single         11821.30         10899.72         78.42         0.719           7159         9         Single         10402.3         10396.68         -3.55         -0.045           8029	5299	9	Single	11024.68	11099.17	74.48	0.671
6369         9         Single         11308.25         11235.00         -73.25         -0.652           6429         9         Single         11438.84         11474.27         35.42         0.309           6469*         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         110571.02         10656.69         85.68         0.804           7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10631.59         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10747.63         10545.02         -2.61         -0.025           8219 <td>6129</td> <td>9</td> <td>Single</td> <td>11044.71</td> <td>11083.61</td> <td>38.90</td> <td>0.351</td>	6129	9	Single	11044.71	11083.61	38.90	0.351
6429         9         Single         11438.84         11474.27         35.42         0.309           6469*         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         10571.02         10656.69         85.68         0.804           7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11923.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10400.23         10396.68         -3.55         -0.034           8129         9         Single         10400.23         10396.68         -3.55         -0.034           8129         9         Single         10547.63         10545.02         -2.61         -0.025           8219	6309	9	Single	10606.37	10514.86	-91.51	-0.870
6469*         9         Single         11200.32         11231.28         30.96         0.276           6479         9         Single         10571.02         10656.69         85.68         0.804           7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10747.63         10545.02         -2.61         -0.025           8219         9         Single         10748.45         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440 <td>6369</td> <td>9</td> <td>Single</td> <td>11308.25</td> <td>11235.00</td> <td>-73.25</td> <td>-0.652</td>	6369	9	Single	11308.25	11235.00	-73.25	-0.652
6479         9         Single         10571.02         10656.69         85.68         0.804           7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         1078.82         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10799.78         10792.15         -7.62         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.015           8229	6429	9	Single	11438.84	11474.27	35.42	0.309
7029         9         Single         11701.97         11638.58         -63.38         -0.545           7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10178.82         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         19533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829 </td <td>6469*</td> <td>9</td> <td>Single</td> <td>11200.32</td> <td>11231.28</td> <td>30.96</td> <td>0.276</td>	6469*	9	Single	11200.32	11231.28	30.96	0.276
7109         9         Single         10821.30         10899.72         78.42         0.719           7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         1078.22         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189	6479	9	Single	10571.02	10656.69	85.68	0.804
7159         9         Single         11223.41         11204.79         -18.62         -0.166           7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10547.63         10545.02         -2.61         -0.025           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10547.63         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         1138.17         11145.51         7.34         0.066           9189	7029	9	Single	11701.97	11638.58	-63.38	-0.545
7269         9         Single         11947.68         11942.25         -5.43         -0.045           8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10178.82         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10484.50         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         1145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209 <td>7109</td> <td>9</td> <td>Single</td> <td>10821.30</td> <td>10899.72</td> <td>78.42</td> <td>0.719</td>	7109	9	Single	10821.30	10899.72	78.42	0.719
8029         9         Single         10400.23         10396.68         -3.55         -0.034           8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10178.82         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10484.50         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759 <td>7159</td> <td>9</td> <td></td> <td>11223.41</td> <td>11204.79</td> <td>-18.62</td> <td>-0.166</td>	7159	9		11223.41	11204.79	-18.62	-0.166
8049         9         Single         10631.59         10586.66         -44.93         -0.424           8129         9         Single         10178.82         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10484.50         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459 </td <td>7269</td> <td>9</td> <td>Single</td> <td>11947.68</td> <td>11942.25</td> <td>-5.43</td> <td>-0.045</td>	7269	9	Single	11947.68	11942.25	-5.43	-0.045
8129         9         Single         10178.82         10165.80         -13.02         -0.128           8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10484.50         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           152	8029	9	Single	10400.23	10396.68	-3.55	-0.034
8209         9         Single         10547.63         10545.02         -2.61         -0.025           8219         9         Single         10484.50         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           22	8049	9	Single	10631.59	10586.66	-44.93	-0.424
8219         9         Single         10484.50         10468.84         -15.66         -0.150           8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594	8129	9	Single	10178.82	10165.80	-13.02	-0.128
8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11207.57         -27.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9 <td>8209</td> <td>9</td> <td>Single</td> <td>10547.63</td> <td>10545.02</td> <td>-2.61</td> <td>-0.025</td>	8209	9	Single	10547.63	10545.02	-2.61	-0.025
8229         9         Single         10799.78         10792.15         -7.62         -0.071           8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175 <td< td=""><td>8219</td><td>9</td><td>Single</td><td>10484.50</td><td>10468.84</td><td>-15.66</td><td>-0.150</td></td<>	8219	9	Single	10484.50	10468.84	-15.66	-0.150
8440         9         Single         9533.17         9511.07         -22.10         -0.232           8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         110266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462	8229	9		10799.78	10792.15	-7.62	-0.071
8729         9         Single         11841.91         11821.53         -20.37         -0.172           8829         9         Single         11138.17         11145.51         7.34         0.066           9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         2185.73         20933.83         -251.90         -1.203	8440	9		9533.17	9511.07	-22.10	-0.232
9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059	8729	9		11841.91	11821.53	-20.37	-0.172
9189         9         Single         11021.44         10983.89         -37.55         -0.342           9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279	8829	9	Single	11138.17	11145.51	7.34	0.066
9209         9         Single         11235.12         11207.57         -27.55         -0.246           9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         2185.73         22594.63         -34.23         -0.152           4249         9         Tandem         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9	9189	9		11021.44	10983.89	-37.55	-0.342
9759         9         Single         10266.24         10248.88         -17.36         -0.169           1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           <	9209	9		11235.12	11207.57	-27.55	-0.246
1459         9         Tandem         24117.80         21892.38         -2225.42         -10.165           1529         9         Tandem         26725.90         26569.37         -156.53         -0.589           2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         22628.87         22594.63         -34.23         -0.152           4249         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895	9759	9	<del></del>	10266.24	10248.88	-17.36	-0.169
2229         9         Tandem         23960.27         23818.77         -141.50         -0.594           4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         22628.87         22594.63         -34.23         -0.152           4249         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           61	1459	9		24117.80	21892.38	-2225.42	-10.165
4049         9         Tandem         24598.37         24312.65         -285.72         -1.175           4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         22628.87         22594.63         -34.23         -0.152           4249         9         Tandem         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9	1529	9	Tandem	26725.90	26569.37	-156.53	-0.589
4129         9         Tandem         21848.23         21747.73         -100.50         -0.462           4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         22628.87         22594.63         -34.23         -0.152           4249         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369	2229	9	Tandem	23960.27	23818.77	-141.50	-0.594
4149         9         Tandem         21185.73         20933.83         -251.90         -1.203           4229         9         Tandem         22628.87         22594.63         -34.23         -0.152           4249         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	4049	9	Tandem	24598.37	24312.65	-285.72	-1.175
4229         9         Tandem         22628.87         22594.63         -34.23         -0.152           4249         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	4129	9	Tandem	21848.23	21747.73	-100.50	-0.462
4249         9         Tandem         21396.92         21397.70         0.78         0.004           5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	4149	9	Tandem	21185.73	20933.83	-251.90	-1.203
5019         9         Tandem         19597.97         19652.75         54.78         0.279           5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	4229	9	Tandem	22628.87	22594.63	-34.23	-0.152
5059         9         Tandem         20292.13         20206.95         -85.18         -0.422           5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	4249	9	Tandem	21396.92	21397.70	0.78	0.004
5249         9         Tandem         19861.98         19492.68         -369.30         -1.895           5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	5019	9	Tandem	19597.97	19652.75	54.78	0.279
5289         9         Tandem         18711.42         18746.50         35.08         0.187           5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	5059	9	Tandem	20292.13	20206.95	-85.18	-0.422
5299         9         Tandem         20160.80         20284.38         123.58         0.609           6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	5249	9	Tandem	19861.98	19492.68	-369.30	-1.895
6129         9         Tandem         20574.20         20492.30         -81.90         -0.400           6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	5289	9	Tandem	18711.42	18746.50	35.08	0.187
6309         9         Tandem         19048.13         19005.37         -42.77         -0.225           6369         9         Tandem         25057.73         24807.17         -250.57         -1.010	5299	9	Tandem	20160.80	20284.38	123.58	0.609
6369 9 Tandem 25057.73 24807.17 -250.57 -1.010	6129	9	Tandem	20574.20	20492.30	-81.90	-0.400
	6309	9	Tandem	19048.13	19005.37	-42.77	-0.225
6429 9 Tandem 21190.65 21133.67 -56.98 -0.270	6369	9	Tandem	25057.73	24807.17	-250.57	-1.010
	6429	9	Tandem	21190.65	21133.67	-56.98	-0.270

Site         Vehicle Class         Axle Type         OWPM Load         Continuous Load         Difference         Percent Difference           6469*         9         Tandem         20828.85         20866.22         37.37         0.179           6479         9         Tandem         21692.13         21854.80         162.67         0.744           7029         9         Tandem         21366.88         216444.93         278.05         1.285           7109         9         Tandem         2266.88         21644.93         278.05         1.285           7159         9         Tandem         26761.08         26674.28         -86.80         -0.325           7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         2249.05         22384.22         -44.83         -0.200           8219         9         Tandem         18879.90         18829.08         -68.82         -0.365 <th></th> <th></th> <th></th> <th>Table B-6.</th> <th>(cont u)</th> <th></th> <th></th>				Table B-6.	(cont u)		
Class   Type   Load   Load   Difference	Site				l	Difference	
6479         9         Tandem         21692.13         21854.80         162.67         0.744           7029         9         Tandem         24648.52         24690.73         42.22         0.171           7109         9         Tandem         21366.88         21644.93         278.05         1.285           7159         9         Tandem         26761.08         26674.28         -86.80         -0.325           7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         20425.45         20431.15         5.70         0.028           8049         9         Tandem         224696.78         22362.83         -333.95         -1.493           8129         9         Tandem         22696.78         22362.83         -333.95         -1.493           8209         9         Tandem         2249.05         22384.22         -44.83         -0.200           8209         9         Tandem         2249.05         22384.22         -44.83         -0.200           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440 <td></td> <td>Class</td> <td>Type</td> <td>Load</td> <td>Load</td> <td></td> <td>Difference</td>		Class	Type	Load	Load		Difference
6479         9         Tandem         21692.13         21854.80         162.67         0.744           7029         9         Tandem         24648.52         24690.73         42.22         0.171           7109         9         Tandem         21366.88         21644.93         278.05         1.285           7159         9         Tandem         26761.08         26674.28         -86.80         -0.325           7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         20425.45         20431.15         5.70         0.028           8049         9         Tandem         224696.78         22362.83         -333.95         -1.493           8129         9         Tandem         22696.78         22362.83         -333.95         -1.493           8209         9         Tandem         2249.05         22384.22         -44.83         -0.200           8209         9         Tandem         2249.05         22384.22         -44.83         -0.200           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440 <td>6469*</td> <td>9</td> <td>Tandem</td> <td>20828.85</td> <td>20866.22</td> <td>37.37</td> <td>0.179</td>	6469*	9	Tandem	20828.85	20866.22	37.37	0.179
7029         9         Tandem         24648.52         24690.73         42.22         0.171           7109         9         Tandem         21366.88         21644.93         278.05         1.285           7159         9         Tandem         26761.08         26674.28         -86.80         -0.325           7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18879.00         18829.08         -68.82         -0.365           8229         9         Tandem         28541.37         20595.25         53.88         0.262           8440         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829	<u> </u>						
7109         9         Tandem         21366.88         21644.93         278.05         1.285           7159         9         Tandem         26761.08         26674.28         -86.80         -0.325           7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         20425.45         20431.15         5.70         0.028           8049         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         289.08         -68.82         -0.365           8229         9         Tandem         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem <t< td=""><td></td><td></td><td></td><td></td><td>· · · · · · · · · · · · · · · · · · ·</td><td><del></del></td><td></td></t<>					· · · · · · · · · · · · · · · · · · ·	<del></del>	
7159         9         Tandem         26761.08         26674.28         -86.80         -0.325           7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         20425.45         20431.15         5.70         0.028           8049         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         22692.48         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18897.90         18829.08         -68.82         -0.365           8229         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         224693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           920					<del></del>	<del> </del>	
7269         9         Tandem         22216.97         22189.62         -27.35         -0.123           8029         9         Tandem         20425.45         20431.15         5.70         0.028           8049         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         22699.248         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18879.90         18829.08         -68.82         -0.365           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24051.53         -141.57         -0.58           9209<					<del></del>		
8029         9         Tandem         20425.45         20431.15         5.70         0.028           8049         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18877.02         18829.08         -68.82         -0.365           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209		9					
8049         9         Tandem         22696.78         22362.83         -333.95         -1.493           8129         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18879.90         18829.08         -68.82         -0.365           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         28190.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           152		9				<del></del>	
8129         9         Tandem         20592.48         20642.93         50.45         0.244           8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18897.90         18829.08         -68.82         -0.365           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         28199.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         1349.68         13074.78         -74.90         -0.573           2229		9					
8209         9         Tandem         22429.05         22384.22         -44.83         -0.200           8219         9         Tandem         18897.90         18829.08         -68.82         -0.365           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         2310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         1890.49         14945.86         55.37         0.370           1529         13         Single         1349.68         13074.78         -74.90         -0.573           2229	<b></b>	9			<del></del>	<del></del>	
8219         9         Tandem         18897.90         18829.08         -68.82         -0.365           8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         13890.49         14945.86         55.37         0.370           1529         13         Single         1349.68         13074.78         -74.90         -0.573           2229         13         Single         1365.06         11563.93         -101.13         -0.874           4		9	<del></del>	22429.05	22384.22	L	-0.200
8229         9         Tandem         20541.37         20595.25         53.88         0.262           8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         13450.12         13759.88         309.76         2.251           414		9			<del></del>		<del></del>
8440         9         Tandem         18276.82         18276.23         -0.58         -0.003           8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         1349.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13330.65         13389.73         59.08         0.441           4		9				<del></del>	<del> </del>
8729         9         Tandem         22586.45         22516.75         -69.70         -0.310           8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         1349.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         10886.43         10634.53         -251.89         -2.369           <	<u> </u>	1			<del></del>	<del> </del>	
8829         9         Tandem         24693.00         24651.08         -41.92         -0.170           9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         1365.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         1330.65         13389.73         59.08         0.441           4229         13         Single         1086.43         10634.53         -251.89         -2.369		9			<del></del>		<del> </del>
9189         9         Tandem         24199.10         24057.53         -141.57         -0.588           9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         133450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         11086.43         10634.53         -251.89         -2.369		9	~~~	<del></del>		<del>}</del>	
9209         9         Tandem         20310.63         20254.18         -56.45         -0.279           9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         1330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         13325.43         13405.34         79.91         0.596		9		24199.10	<del>                                       </del>		<del> </del>
9759         9         Tandem         18890.00         18815.72         -74.28         -0.395           1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         1325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156		9			<del></del>	<del></del>	
1459         13         Single         14890.49         14945.86         55.37         0.370           1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156 <t< td=""><td></td><td>9</td><td></td><td></td><td><del></del></td><td><del> </del></td><td><del></del></td></t<>		9			<del></del>	<del> </del>	<del></del>
1529         13         Single         13149.68         13074.78         -74.90         -0.573           2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391 <t< td=""><td></td><td>13</td><td><del> </del></td><td>14890.49</td><td><del> </del></td><td><del> </del></td><td><del> </del></td></t<>		13	<del> </del>	14890.49	<del> </del>	<del> </del>	<del> </del>
2229         13         Single         13923.50         13926.89         3.39         0.024           4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         12505.08         12180.53         -324.56         -2.665           <	1529	13		13149.68	13074.78	<del></del>	<del> </del>
4049         13         Single         11665.06         11563.93         -101.13         -0.874           4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         1325.57         13239.49         113.92         0.860	2229	13	<del></del>	13923.50	13926.89	3.39	0.024
4129         13         Single         13450.12         13759.88         309.76         2.251           4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         13125.57         13239.49         113.92         0.860	4049	13		11665.06	11563.93	-101.13	-0.874
4149         13         Single         13330.65         13389.73         59.08         0.441           4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627	4129	13		<del></del>	13759.88	309.76	2.251
4229         13         Single         10886.43         10634.53         -251.89         -2.369           4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242	4149	13	<del></del>	13330.65	13389.73	59.08	0.441
4249         13         Single         11020.76         11128.42         107.66         0.967           5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242	4229	13	<del></del>	10886.43	10634.53	-251.89	-2.369
5019         13         Single         11692.92         11656.51         -36.41         -0.312           5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         15580.97         15271.95         -309.02         -2.023	4249	13		11020.76	11128.42	107.66	0.967
5059         13         Single         13325.43         13405.34         79.91         0.596           5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	5019	13		11692.92	11656.51	-36.41	-0.312
5249         13         Single         13415.56         13997.29         581.73         4.156           5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	5059	13		<del></del>	13405.34	79.91	
5289         13         Single         11668.46         11714.30         45.84         0.391           5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	5249	13		13415.56	13997.29	581.73	4.156
5299         13         Single         11047.45         10931.17         -116.28         -1.064           6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	5289	13		11668.46	11714.30	45.84	0.391
6129         13         Single         12505.08         12180.53         -324.56         -2.665           6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	<u> </u>	<del> </del>		11047.45	<del></del>	-116.28	<del> </del>
6309         13         Single         12566.32         12451.86         -114.46         -0.919           6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023		13		12505.08	<del> </del>	<del>                                     </del>	<del></del>
6369         13         Single         13125.57         13239.49         113.92         0.860           6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	6309	13		12566.32	<del>                                     </del>	<del></del>	<del> </del>
6429         13         Single         13034.40         13116.62         82.22         0.627           6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	6369	13		13125.57	13239.49	113.92	0.860
6469*         13         Single         13943.32         13977.14         33.83         0.242           6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	6429	13		13034.40	13116.62	82.22	0.627
6479         13         Single         12955.10         13138.87         183.77         1.399           7029         13         Single         15580.97         15271.95         -309.02         -2.023	6469*	13	· ·	13943.32	13977.14	33.83	0.242
7029 13 Single 15580.97 15271.95 -309.02 -2.023	6479	13		12955.10	13138.87	183.77	1.399
	7029	13		15580.97	15271.95	-309.02	-2.023
	7109	13		10510.43	10539.01	28.58	0.271
7159 13 Single 14935.77 14828.57 -107.20 -0.723	7159	13		14935.77	14828.57	-107.20	-0.723
7269 13 Single 13153.33 13173.81 20.48 0.155	7269	13		13153.33	13173.81	20.48	0.155

			Table B-6.	(cont a)		
Site	Vehicle Class	Axle Type	OWPM Load	Continuous Load	Difference	Percent Difference
8029	13	Single	13609.48	13551.43	-58.06	-0.428
8049	13	Single	13215.76	12644.36	-571.40	-4.519
8129	13	Single	13099.91	13313.24	213.33	1.602
8209	13	Single	13447.46	13528.02	80.56	0.595
8219	13	Single	12462.23	12554.43	92.19	0.734
8229	13	Single	11972.70	11911.04	-61.66	-0.518
8440	13	Single	11375.64	10888.83	-486.81	-4.471
8729	13	Single	12935.14	13152.21	217.07	1.650
8829	13	Single	14746.13	14532.95	-213.17	-1.467
9189	13	Single	12863.44	12804.11	-59.33	-0.463
9209	13	Single	13033.35	13024.65	-8.70	-0.067
9759	13	Single	12339.12	12565.31	226.19	1.800
1459	13	Tandem	24187.60	24213.80	26.20	0.108
1529	13	Tandem	23157.30	22884.67	-272.63	-1.191
2229	13	Tandem	20594.22	20767.97	173.75	0.837
4049	13	Tandem	21533.53	21472.38	-61.15	-0.285
4129	13	Tandem	19720.23	20092.35	372.12	1.852
4149	13	Tandem	22127.75	22394.42	266.67	1.191
4229	13	Tandem	19434.45	19423.77	-10.68	-0.055
4249	13	Tandem	18569.18	18589.52	20.33	0.109
5019	13	Tandem	18383.82	18433.93	50.12	0.272
5059	13	Tandem	20950.25	21233.68	283.43	1.335
5249	13	Tandem	21578.33	22144.90	566.57	2.558
5289	13	Tandem	17020.37	17459.35	438.98	2.514
5299	13	Tandem	18808.22	18896.57	88.35	0.468
6129	13	Tandem	20844.92	20639.42	-205.50	-0.996
6309	13	Tandem	21815.45	21400.67	-414.78	-1.938
6369	13	Tandem	24904.32	24861.25	-43.07	-0.173
6429	13	Tandem	20596.23	20572.45	-23.78	-0.116
6469*	13	Tandem	25300.53	25108.18	-192.35	-0.766
6479	13	Tandem	21083.53	21265.57	182.03	0.856
7029	13	Tandem	27721.62	27261.03	-460.58	-1.690
7109	13	Tandem	17929.43	17970.83	41.40	0.230
7159	13	Tandem	29649.75	29584.05	-65.70	-0.222
7269	13	Tandem	19479.70	19277.43	-202.27	-1.049
8030	13	Tandem	25507.38	25460.80	-46.58	-0.183
8049	13	Tandem	21589.90	22627.05	1037.15	4.584
8129	13	Tandem	23398.82	23504.68	105.87	0.450
8209	13	Tandem	27320.37	27480.87	160.50	0.584
8219	13	Tandem	20637.30	20896.33	259.03	1.240
8229	13	Tandem	22542.30	22564.65	22.35	0.099

Table B-6. (cont'd)

Site	Vehicle Class	Axle Type	OWPM Load	Continuous Load	Difference	Percent Difference
8440	13	Tandem	20424.25	20866.65	442.40	2.120
8729	13	Tandem	23877.98	24351.93	473.95	1.946
8829	13	Tandem	28583.42	28636.62	53.20	0.186
9189	13	Tandem	26913.80	26696.95	-216.85	-0.812
9209	13	Tandem	24625.32	24556.02	-69.30	-0.282
9759	13	Tandem	21004.90	21103.10	98.20	0.465

<sup>\*</sup>Indicates data was not used in the statistical analyses

Table B-7. Rigid Pavement Design Life Based on Percent Slabs Cracked (1 of 3)

Site	,	Fra.mo	OWPM	OWPM	MAMO	HDF	HDF	HDF	MDF	MDF	MDF
No.	COIII.	OWFIN	CAADTT	Cont. VC5	Cont. VC9	(Average)	(Cluster)	(Default)	(Average)	(Default)	(Cluster)
1459	15.83	18.33	18.00	18.17	18.42	13.75	14.50	11.00	16.00	16.83	16.00
1529	21.92	22.92	21.00	22.92	23.25	18.50	24.17	14.08	21.83	22.58	22.17
2229	22.58	23.67	23.50	23.67	23.83	21.83	19.67	16.75	21.92	22.75	21.92
4049	17.92	19.00	18.58	19.00	19.50	16.75	14.92	12.75	18.50	18.83	18.00
4129	21.67	24.67	22.92	24.75	24.75	20.58	18.67	15.92	21.83	22.75	21.83
4149	21.75	24.17	21.67	24.17	24.50	20.00	26.75	15.58	21.83	22.67	21.75
4229	18.83	18.42	18.00	17.92	18.83	16.58	19.50	13.67	18.92	19.67	18.75
4249	15.75	16.00	15.75	16.00	16.08	12.33	15.83	9.58	15.83	16.50	15.83
5019	22.92	24.83	24.25	24.75	24.83	24.92	22.67	19.17	23.42	23.92	22.92
5059	15.58	15.92	15.67	15.92	16.50	13.17	18.50	9.75	15.50	15.92	15.25
5249	17.00	19.50	18.92	18.67	19.83	18.08	17.50	15.67	16.92	17.83	16.92
5289	19.75	20.75	19.92	20.75	20.75	14.67	19.75	10.83	19.92	20.83	19.83
5299	19.67	21.92	20.83	21.92	21.75	23.83	21.50	17.83	19.50	19.92	19.33
6019	23.58	M	M	M	M	23.83	24.92	21.83	23.50	23.42	23.92
6129	16.50	18.75	17.75	18.75	18.92	18.92	16.92	14.50	15.92	16.75	16.50
6309	20.50	21.58	20.92	21.75	21.58	17.83	19.50	15.75	20.92	21.50	20.58
6369	15.42	15.83	15.92	15.83	16.75	19.83	13.67	14.75	14.75	15.25	15.00
6429	17.67	20.08	19.67	20.08	20.58	19.67	17.58	14.75	16.92	17.75	17.67
6469	21.42	M	M	M	M	19.67	26.83	14.75	20.83	21.75	20.92
6479	24.50	27.75	26.83	27.75	26.83	17.75	23.83	13.50	24.17	24.92	24.58
7029	16.75	17.92	17.83	17.92	17.67	25.67	16.92	18.75	16.50	16.92	16.67
7109	19.33	22.58	20.58	22.67	20.92	19.00	17.00	14.67	18.92	19.61	19.67

	MDF	(Cluster)	23.25	21.00	16.92	20.83	20.92	18.83	20.08	18.58	18.42	19.25	24.67	16.83	16.67	24.67
	MDF	(Default)	23.50	21.42	17.58	21.42	21.08	20.75	20.50	19.67	17.92	19.58	24.83	17.92	16.83	25.08
	MDF	(Average)	22.58	20.75	17.00	20.58	20.75	19.83	19.75	18.75	17.75	18.67	23.92	17.17	15.92	24.58
	HDF	(Default)	26.58	24.67	10.75	19.33	16.58	14.92	17.50	15.75	14.67	21.92	21.75	15.75	11.58	14.00
<b>q</b> )	HDF	(Cluster)	24.58	22.75	19.50	22.83	00.61	18.17	20.67	18.83	16.50	20.58	26.00	19.00	13.83	21.92
Table B-7. (cont'd)	HDF	(Average)	30.00	30.00	14.50	25.67	21.08	20.58	22.83	21.00	15.83	29.67	28.92	21.67	15.75	17.75
Table	OWPM	Cont.	25.58	22.75	17.92	21.67	23.17	19.92	21.83	20.67	16.58	21.50	26.67	18.58	18.50	24.92
	OWPM	Cont. VC5	25.50	22.58	17.83	20.75	23.33	19.92	21.58	21.50	16.83	20.83	26.75	18.00	17.83	24.83
	OWPM	CAADTT	24.83	21.83	17.42	19.67	21.92	19.67	20.75	20.92	16.42	19.92	26.00	17.75	17.00	24.58
•		OWPM	25.50	22.58	17.83	20.58	23.33	19.92	21.58	21.50	16.50	20.83	26.75	18.00	17.83	24.83
•		Cont.	23.67	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.67	19.58	24.50	16.92	16.83	24.58
		No.	7159	7269	8029	8049	8129	8209	8219	8229	8440	8729	8829	6816	9209	9759

\*Note N/A excludes sites in clusters which have two or less members. M indicates week or continuous data was missing.

Table B-8. Rigid Pavement Design Life Based on Percent Slabs Cracked (2 of 3)

Site	Conf	AGPV	AGPV	AGPV	TTC	TTC	TTC (Comp M-F PDG	Single	Single	Single
o N		(Average)	Cluster	(Default)	Average	Cluster	Values to Clusters)	(Average)	Cluster	(Default)
1459	15.83	14.75	15.92	16.75	15.92	20.50	22.67	19.75	19.92	19.67
1529	21.92	22.67	21.75	23.58	17.50	24.92	28.33	21.75	21.67	21.67
- 2229	22.58	22.75	22.17	22.92	22.25	22.50	21.92	22.50	22.33	22.33
4049	17.92	18.83	18.50	19.50	17.67	17.75	17.50	17.75	17.75	17.83
4129	21.67	22.58	21.67	22.92	16.92	22.92	25.67	21.75	21.92	21.58
4149	21.75	22.75	21.75	22.75	18.67	24.83	27.75	21.67	21.50	21.42
4229	18.83	18.92	18.83	19.50	18.50	18.08	17.67	18.75	18.08	18.75
4249	15.75	16.33	16.42	16.92	12.50	16.75	17.92	12.58	13.67	11.75
5019	22.92	23.50	22.75	23.58	24.50	24.00	24.50	22.92	22.92	22.92
5059	15.58	15.58	15.58	15.67	16.75	16.58	15.92	15.58	15.58	15.50
5249	17.00	16.00	16.92	14.92	14.92	14.58	13.67	20.42	20.42	20.33
5289	19.75	19.83	19.83	20.00	18.67	18.50	18.00	19.75	19.67	19.42
5299	19.67	19.83	19.61	19.83	22.58	18.75	18.75	19.67	19.67	19.67
6019	23.58	23.42	23.58	22.42	17.42	19.00	19.50	21.67	24.42	17.75
6129	16.50	16.67	16.58	16.58	17.92	17.83	17.67	16.50	16.50	16.50
6306	20.50	19.75	20.50	19.33	21.42	22.42	22.75	18.42	16.67	15.75
6989	15.42	15.50	15.50	15.50	17.92	14.67	14.50	15.42	15.42	15.42
6459	17.67	18.50	17.75	18.58	18.50	17.92	18.50	17.67	17.67	17.67
6469	21.42	20.92	21.50	20.75	24.75	21.00	20.83	21.33	21.33	21.33
6419	24.50	24.58	24.58	24.75	25.58	25.58	24.92	24.08	24.00	24.00

Table B-8. (cont'd)

-			1 0	lable b-o. (colit d)	ıı a)				
						TTC			
-	AGPV (Average)	AGPV Cluster	AGPV (Default)	TTC Average	TTC	M-E PDG	Single (Average)	Single Cluster	Single (Default)
						Clusters)			
	16.75	16.75	16.67	19.58	16.67	15.92	16.75	16.75	16.75
	18.75	18.75	19.42	14.58	14.58	14.00	19.58	19.58	19.50
	23.58	23.50	21.92	26.92	22.83	22.67	23.67	23.67	23.67
	21.00	21.00	21.00	26.75	21.92	21.92	21.08	21.08	21.08
	17.08	16.50	16.67	17.83	17.50	17.17	16.83	16.75	16.75
	20.50	20.50	20.25	22.67	18.92	18.92	20.50	20.50	20.50
	21.08	21.00	21.00	21.50	21.08	20.75	20.83	20.75	20.58
	18.50	18.92	16.92	22.75	22.17	21.58	19.00	19.00	19.00
	19.92	19.92	19.83	21.67	18.50	18.00	20.08	20.08	20.00
	18.58	18.50	18.08	18.92	18.75	18.58	18.75	18.75	18.75
	17.50	19.71	17.58	13.58	14.58	14.92	16.67	18.58	29.6
	19.58	19.61	19.00	22.92	19.50	19.08	19.58	19.58	19.58
	23.92	24.50	23.75	27.83	23.42	22.83	24.50	24.50	24.50
	16.83	16.92	16.67	20.92	17.75	17.58	16.92	16.92	16.92
	16.58	16.75	16.00	17.00	16.75	16.58	16.83	16.83	16.83
	24.42	24.08	24.50	17.92	22.42	24.42	21.58	20.42	16.42
	-	-				-	-		

\*Note N/A excludes sites in clusters which have two or less members. M indicates week or continuous data was missing.

Table B-9. Rigid Pavement Design Life Based on Percent Slabs Cracked (3 of 3)

	Quad	Avg	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.67	19.58	24.50	16.92	16.83	24.58
	Quad	(Default)	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.67	19.58	24.50	16.92	16.83	24.58
	Quad	(Cluster)	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.67	19.58	24.50	16.92	16.83	24.58
	Tridem	(Default)	21.33	16.92	20.50	21.00	19.00	20.25	18.75	17.42	19.67	24.50	16.92	16.83	24.25
(cont'd)	Tridem	(Average)	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.58	19.58	24.50	16.92	16.83	24.58
Table B-9. (cont'd)	Tridem	(Clusters)	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.58	19.58	24.50	16.92	16.83	24.58
	Tandem	(Default)	12.92	10.67	11.83	11.92	13.67	7.75	13.83	12.00	13.50	25.75	18.17	9.75	12.58
	Tandem	Avg	19.75	13.75	16.83	15.42	18.92	10.83	19.58	15.42	19.92	30.00	26.50	14.33	16.92
	Tandem	(Clusters)	16.92	14.00	11.92	20.83	14.50	16.08	20.17	17.42	17.83	26.92	19.42	18.75	21.75
	Jun 1	COIII.	21.08	16.92	20.50	21.00	19.00	20.17	18.75	17.67	19.58	24.50	16.92	16.83	24.58
	Site	No.	7269	8029	8049	8129	8209	8219	8229	8440	8729	8829	6816	9209	9759

\*Note N/A excludes sites in clusters which have two or less members or the utilized flexible pavement design could not produce

usable data for comparison. M indicates week or continuous data was missing.

Table B-10. Flexible Pavement Design Life Based on Fatigue Cracking (1 of 2)

Site No	Cont	Mamo	OWPM	OWPM	OWPM	MDF	MDF	HDF	HDF	AGPV	AGPV
Site 140.	COIII.	OWFIN	CADDT	VC5	VC9	Avg	Cluster	Cluster	Avg	Avg	Cluster
1459	10.75	10.92	10.92	10.92	11.00	10.83	10.83	10.75	10.75	10.83	10.83
1529	6.83	10.42	<i>L</i> 9.6	10.42	10.58	9.83	6.65	9.83	9.83	29.6	9.83
2229	11.92	12.67	12.67	12.67	12.67	11.83	11.83	11.92	11.92	11.83	11.92
4049	13.67	14.00	13.67	14.08	13.92	13.75	13.67	13.67	13.67	13.67	13.58
4129	10.00	11.00	10.67	11.08	11.17	10.25	10.17	10.00	10.00	10.08	9.92
4149	12.67	13.58	11.83	13.58	13.58	12.58	12.58	12.67	12.67	12.92	12.83
4229	12.67	12.67	12.58	12.58	12.75	12.75	12.67	12.67	12.67	12.83	12.67
4249	12.58	10.83	10.75	10.83	10.83	10.67	10.92	12.58	12.58	12.67	12.58
5019	16.08	17.50	16.92	17.33	17.50	16.67	16.33	16.08	16.08	16.67	16.67
5059	18.83	16.75	18.75	16.75	16.92	18.75	18.67	18.83	18.83	18.67	18.67
5249	17.17	19.67	19.42	18.50	19.83	17.00	16.92	17.17	17.17	16.83	17.00
5289	11.50	11.67	11.50	11.67	11.67	11.58	11.50	11.50	11.50	11.50	11.33
5299	21.58	24.25	23.50	24.17	23.92	21.42	21.58	21.58	21.58	20.67	21.67
6019	17.58	M	M	M	M	17.67	17.75	17.58	17.58	17.67	17.50
6129	19.92	21.83	20.83	21.83	21.83	19.92	20.33	19.92	19.92	20.58	20.42
6306	9.25	29.6	9.58	9.75	19.6	9.50	9.25	9.25	9.25	9.42	80.6
6369	23.67	23.58	23.67	23.58	24.08	22.83	23.50	23.67	23.67	23.00	23.58
6429	16.50	17.58	16.83	17.50	17.58	15.83	16.58	16.50	16.50	16.58	16.50
6469	4.58	M	M	M	M	4.58	4.58	4.58	4.58	4.42	4.58
6479	16.92	19.25	18.75	19.17	18.75	17.00	17.00	16.92	16.92	16.92	17.00
7029	18.92	19.92	19.83	19.92	19.83	18.92	18.92	18.92	18.92	19.75	18.92
7109	12.83	14.75	13.67	14.83	14.00	12.75	13.00	12.83	12.83	12.83	12.75
7159	ND	ND	ND	ND ND	ND	ND	ND	ND	ND	ND	ND

	19.67	14.67	18.42	11.00	QN	18.58	19.83	13.42	20.92	QN	ND ND	QN	8.83
	19.75	14.92	18.50	11.42	QN	18.67	19.92	13.50	20.92	QN	QN	QN	8.83
	19.83	14.58	18.25	11.33	QN	18.58	19.83	13.50	21.17	ND	ON	ON	8.83
	19.83	14.58	18.25	11.33	R	18.58	19.83	13.50	21.17	QN	ND	ND ND	8.83
	19.83	14.58	18.17	11.08	R	18.58	19.75	13.58	20.83	ND	ND	R	8.83
ont'd)	19.58	14.67	17.92	10.92	R	17.83	20.00	13.42	20.67	ND	ND	SP.	8.83
Table B-10. (cont'd)	20.75	14.83	15.83	12.17	QN	19.83	20.83	12.83	22.67	ND	QN	QN	9.50
Tabl	20.67	14.83	18.83	12.17	QN	19.75	20.92	12.83	22.58	ND	QN	QN	9.42
	20.33	14.67	15.00	11.58	S S	19.08	20.75	12.67	21.67	ND	ND	Q.	9.33
	20.67	14.83	15.75	12.17	<del>S</del>	19.75	20.92	12.75	22.58	ND	ND	R	9.50
	19.83	14.58	18.25	11.33	ND	18.58	19.83	13.50	21.17	ND	ND	N N	8.83
•	7269	8029	8049	8129	8209	8219	8229	8440	8729	8829	6816	9209	9759

\*Note N/A excludes sites in clusters which have two or less members. ND indicates that the flexible pavement design used in the

analysis could not produce usable distress data for comparison. M indicates week or continuous data was missing

Table B-11. Flexible Pavement Design Life Based on Fatigue Cracking (2 of 2)

			[		Г		Γ			r	Γ		Ι	Г	Г—						Γ			
Quad	Cluster	10.42	10.58	N/A	13.50	10.75	12.17	12.42	11.67	15.58	19.00	17.33	N/A	20.92	18.42	20.58	9.50	23.67	16.75	4.50	17.58	19.67	N/A	ND
Onad Avo	9,11,2	10.92	10.92	11.67	13.17	10.67	13.75	11.58	10.58	15.00	18.67	17.83	10.58	20.83	18.00	19.75	9.33	23.58	16.67	4.42	16.50	19.58	12.67	QN
Tri	Cluster	10.75	9.75	11.83	13.67	10.00	12.58	12.67	N/A	15.92	18.83	17.33	11.42	21.58	17.67	20.00	9.25	23.58	16.58	N/A	17.00	18.92	12.83	Ð.
Tri Avo	0,11,111	10.75	9.75	11.83	13.58	9.92	12.58	12.67	12.08	15.92	18.75	17.33	11.42	21.58	17.75	19.92	9.17	23.67	16.42	4.58	17.00	18.92	12.83	Q.
Tan	Cluster	10.92	9.92	11.75	13.67	29.6	11.75	12.67	10.75	15.92	19.75	17.75	11.75	21.50	18.33	20.75	8.67	21.67	16.42	4.58	16.75	20.00	14.83	EN CHARLES
Tan Avo	5 mi 1115	10.92	10.83	11.92	13.67	29.6	11.75	12.75	10.58	13.83	17.08	17.67	10.25	19.61	18.42	18.58	8.67	24.67	16.58	3.83	16.75	20.00	14.75	Ð
SA	Cluster	12.83	10.17	12.42	12.67	10.58	11.75	12.75	11.00	15.67	19.08	20.00	10.42	21.42	17.75	19.83	9.25	22.67	17.42	4.50	16.67	20.00	13.50	Ð
SA	Avg	12.58	10.33	12.58	12.67	9.92	11.83	12.75	10.67	15.67	19.00	20.00	10.58	21.42	17.08	19.83	9.42	22.75	17.67	4.50	16.75	20.00	13.67	R
TTC	Cluster	13.08	10.83	12.58	14.58	10.92	14.75	12.50	13.75	16.67	17.58	15.67	10.67	21.92	13.50	20.92	9.92	22.83	17.58	4.58	18.17	17.83	10.42	QN N
TTC	Avg	10.75	8.50	12.67	14.67	8.83	12.67	12.75	10.92	16.83	17.83	16.00	10.75	23.42	11.67	21.75	8.83	25.08	17.75	4.75	18.67	18.75	10.58	N N
Cont		10.75	9.83	11.92	13.67	10.00	12.67	12.67	12.58	16.08	18.83	17.17	11.50	21.58	17.58	19.92	9.25	23.67	16.50	4.58	16.92	18.92	12.83	QN
Site	No.	1459	1529	2229	4049	4129	4149	4229	4249	5019	5059	5249	5289	5299	6019	6129	6306	6989	6459	6469	6479	7029	7109	7159

	Quad	Cluster	19.83	13.83	18.58	10.92	ND	18.58	20.58	13.42	20.92	ND	ND	ND	8.92
	Out Ava	Quad Avg	19.83	15.50	17.83	10.58	QN	17.83	20.33	13.33	20.83	QN	QN	QN	8.83
	Tri	Cluster	19.83	14.58	18.17	11.33	ND	18.67	19.83	13.33	21.08	ND	ND	ON.	8.83
	]#: \ \ \ \	S^A C 1111	19.83	14.58	18.25	11.33	QN	18.50	19.83	13.42	21.17	QN	ND ND	QN.	8.83
ont'd)	Tan	Cluster	18.25	13.50	14.83	11.17	ON	18.67	20.58	12.67	20.75	QN	ND	ON	8.50
Table B-11. (cont'd)	Ton Aye	I all Ave	19.58	13.50	16.92	29.6	QN	14.67	20.17	11.50	21.58	QN	QN.	R	7.08
Tab	SA	Cluster	20.75	13.67	18.83	10.58	N ON	16.75	19.92	13.83	22.67	Q.	QN N	<del>S</del>	8.00
	SA	Avg	20.83	13.75	18.83	10.67	EN	16.75	20.50	12.67	22.67	<del>N</del>	EN.	<del>Q</del>	8.42
	TTC	Cluster	18.75	14.67	17.67	10.92	R	17.67	19.61	7.83	20.92	R	QN	R	6.58
	TTC	Avg	19.83	15.17	17.92	11.33	QN	17.83	19.92	7.17	22.67	QN	ND	QN	2.67
	Cont	COIII.	19.83	14.58	18.25	11.33	ND	18.58	19.83	13.50	21.17	QN	ON	N N	8.83
	Site	No.	7269	8029	8049	8129	8209	8219	8229	8440	8729	8829	6816	9209	9759

\*Note N/A excludes sites in clusters which have two or less members. ND indicates that the flexible pavement design used in the

analysis could not produce usable distress data for comparison. M indicates week or continuous data was missing

Table B-12. Flexible Pavement Design Life Based on Rutting (1 of 2)

	AGPV Cluster	16.50	17.67	ND	17.83	17.67	13.75	ND	ND	19.67	15.83	11.33	14.58	10.67	17.00	13.75	15.75	14.83	14.58	10.42	13.83	6.75	17.67	S
-	AGPV Avg	15.83	17.00	ND	17.75	17.75	13.75	ND	ND	18.83	15.75	11.75	14.75	10.83	17.75	13.75	16.75	13.67	14.67	8.67	14.67	6.75	17.67	R
-	HDF Default	15.75	17.67	ND	18.75	17.75	13.00	QN	QN	18.83	15.92	11.67	14.67	10.58	17.50	13.83	15.92	14.75	14.67	9.75	13.83	6.75	17.75	QN
ó	HDF Avg	15.75	17.67	QN.	18.75	17.75	13.00	R	R	18.83	15.92	11.67	14.67	10.58	17.50	13.83	15.92	14.75	14.67	9.75	13.83	6.75	17.75	ND
	HDF Cluster	15.75	17.67	QN	18.75	17.75	13.00	QN.	QN Q	18.83	15.92	11.67	14.67	10.58	17.50	13.83	15.92	14.75	14.67	9.75	13.83	6.75	17.75	ND
	MDF Cluster	16.50	17.67	QN	18.75	17.75	12.83	Q2	PR PR	18.92	15.83	11.58	14.67	10.58	17.50	13.83	15.83	14.75	14.67	29.6	13.83	6.75	17.83	ND
	Avg	16.67	17.58	Ð	19.58	17.75	12.83	Ð	£	19.67	15.83	11.50	14.67	10.67	17.42	13.75	16.00	14.67	13.83	29.6	13.83	6.75	17.75	QN
OWPM	Cont. VC9	16.83	18.67	QN.	20.00	19.75	13.83	QN	N N	20.00	14.75	13.83	14.67	13.83	M	15.08	17.67	15.83	15.75	M	14.92	6.83	20.00	ND QN
OWPM	Cont. VC5	16.83	18.67	QZ	20.00	19.67	13.83	S S	<del>S</del>	20.00	14.75	13.67	14.67	13.83	M	14.92	17.67	15.75	15.75	M	15.50	6.83	20.00	N ON
	CADDT	16.83	17.67	ON.	19.92	18.67	12.67	QN	QN	20.00	16.00	13.67	13.92	13.67	M	14.75	17.50	15.75	15.50	M	14.83	6.83	19.75	QN
	OWPM	16.83	18.67	ND	20.00	19.75	13.83	ND ND	QN.	20.00	14.75	13.75	14.67	13.83	M	14.92	17.67	15.75	15.75	M	15.50	6.83	20.00	ND
	Cont.	15.75	17.67	ND	18.75	17.75	13.00	ND	ND	18.83	15.92	11.67	14.67	10.58	17.50	13.83	15.92	14.75	14.67	9.75	13.83	6.75	17.75	ND
i	Site No.	1459	1529	2229	4046	4129	4149	4229	4249	5019	5059	5249	5289	5299	6019	6129	6306	6989	6459	6469	6479	7029	7109	7159

ite	(		OWPM	OWPM	OWPM	MDF	MDF	HDF	HDF	HDF	AGPV	AGPV
No.	Cont.	OWPM	CADDT	Cont.	Cont.	Avg	Cluster	Cluster	Avg	Default	Avg	Cluster
7269	17.58	17.83	17.75	17.83	18.00	16.67	17.58	17.58	17.58	17.58	16.92	16.83
8029	12.83	13.67	13.00	13.67	13.67	13.33	12.83	12.83	12.83	12.83	13.83	13.00
8049	12.83	11.75	11.58	13.83	11.75	12.75	12.83	12.83	12.83	12.83	12.83	13.33
8129	ND	ND	ND	N	N	ND ND	ND ND	N	ND	ND	ND	ND
8209	ND	ND	ND	ND	ND	ND	N	N	N	ND	ND	ND ND
8219	14.75	16.50	15.75	16.50	16.58	13.83	14.75	14.75	14.75	13.83	14.75	14.83
8229	10.83	11.75	11.75	11.75	11.75	11.00	10.83	10.83	10.83	11.00	10.92	10.83
8440	ND	ND	ND	ND	ND	ND	ND	N	ND	ND	ND	ND
8729	10.83	11.75	11.58	11.75	11.75	10.67	10.75	10.83	10.83	10.67	10.83	10.83
8829	9.33	10.33	9.83	10.33	10.25	8.83	19.6	9.33	9.33	8.92	9.92	6.67
6816	7.92	8.67	8.67	8.67	8.67	8.58	7.83	7.92	7.92	8.58	8.67	8.50
9209	8.92	9.75	6.67	9.83	9.83	8.75	8.75	8.92	8.92	8.75	29.6	8.83
9759	26.83	29.67	29.58	29.75	29.75	26.75	26.83	26.83	26.83	26.75	26.67	26.83

\*Note N/A excludes sites in clusters which have two or less members. ND indicates that the flexible pavement design used in the

analysis could not produce usable distress data for comparison. M indicates week or continuous data was missing.

Table B-13. Flexible Pavement Design Life Based on Rutting (2 of 2)

Avg         Cluster         Avg         Cluster         Tan Avg         Cluster         Tri Avg         Cluster           16.75         18.83         17.75         17.83         15.92         15.83         15.83         15.83           16.75         18.83         17.75         17.83         17.50         17.50         17.50           16.92         19.00         17.75         18.00         17.67         17.75         18.00         17.67         17.75           16.92         19.67         17.75         18.00         17.67         17.58         17.67         18.75           16.92         19.67         17.75         18.00         17.67         17.58         17.67         18.75           16.92         19.67         17.75         18.00         17.67         18.83         18.75         12.83           16.92         19.67         17.67         18.83         18.75         18.75         18.75           16.92         19.67         18.83         18.75         11.75         11.67         11.67           19.75         18.75         19.75         17.67         18.83         18.75         18.75           11.83         11.83         10.60 <th> </th> <th></th> <th>TYT</th> <th>Jul</th> <th>80</th> <th>V</th> <th></th> <th>Ton</th> <th></th> <th>. <u>F</u></th> <th>Oned</th> <th>Peno</th>			TYT	Jul	80	V		Ton		. <u>F</u>	Oned	Peno
16.75         18.83         17.75         17.83         15.92         15.92         15.83         15.83           14.75         17.75         17.78         17.42         17.83         17.59         17.50         17.50           ND         ND         ND         ND         ND         ND         ND         ND           20.00         20.00         17.75         17.75         19.33         19.33         18.67         18.75           16.92         19.67         17.75         18.00         17.67         17.75         18.75           14.25         15.83         12.75         12.67         17.67         17.75         18.75           ND         ND         ND         ND         ND         ND         ND           ND         ND         ND         ND         ND         ND           19.75         19.75         19.75         17.67         18.83         18.75         18.75           19.75         19.75         19.75         11.75         11.75         11.67         11.67           19.75         18.75         13.83         13.75         11.75         11.67         11.67           19.83         11.83		Cont.	Avg	Cluster	Avg	Cluster	Tan Avg	Cluster	Tri Avg	Cluster	Avg	Cluster
14.75         17.75         17.58         17.42         17.83         17.58         17.50         17.50           ND         ND         ND         ND         ND         ND         ND         ND           20.00         20.00         17.75         17.75         19.33         19.33         18.67         18.75           16.92         19.67         17.75         18.00         17.67         17.58         17.67         17.75           14.25         15.83         12.75         12.67         12.75         12.92         12.83           14.25         15.83         12.75         12.67         12.75         12.92         12.83           ND         ND         ND         ND         ND         ND         ND         ND           19.75         18.75         19.75         17.67         18.83         18.75         18.75           19.75         18.75         19.75         11.75         11.75         11.67         11.67           19.75         18.83         18.75         11.75         11.75         11.67         14.33           11.83         11.83         10.60         10.67         9.75         10.58         10.58	<b>└</b> ─	15.75	16.75	18.83	17.75	17.83	15.92	15.92	15.83	15.83	17.67	14.42
ND         ND         ND         ND         ND         ND         ND         ND           20.00         20.00         17.75         17.75         19.33         18.67         18.75         18.75           16.92         19.67         17.75         18.00         17.67         17.58         17.67         17.75           16.92         19.67         17.75         18.00         17.67         17.58         17.67         18.75           14.25         15.83         12.75         12.67         12.75         12.92         12.83           ND         ND         ND         ND         ND         ND         ND         ND           ND         ND         ND         ND         ND         ND         ND         ND           19.75         18.75         19.75         17.67         18.83         18.75         18.75           10.50         9.75         16.00         14.83         16.75         16.75         16.00           10.50         9.75         13.67         11.75         11.75         11.67         11.67           11.83         11.83         13.83         13.75         14.75         14.75         14.75		17.67	14.75	17.75	17.58	17.42	17.83	17.58	17.50	17.50	20.00	20.00
20.00         20.00         17.75         17.75         19.33         18.67         18.75         17.75         18.00         17.67         17.58         17.67         17.75         18.00         17.67         17.58         17.67         17.75         18.05         17.75         18.05         17.75         18.05         17.67         17.75         12.83         17.67         17.83         17.67         18.75         12.83         18.75 <td< td=""><td>_</td><td>ND</td><td>ND</td><td>ND</td><td>ND</td><td>ND</td><td>QN</td><td>ND</td><td>QN</td><td>ND</td><td>ON ON</td><td>ND</td></td<>	_	ND	ND	ND	ND	ND	QN	ND	QN	ND	ON ON	ND
16.92         19.67         17.75         18.00         17.67         17.55         12.05         17.75         18.00         17.67         17.75         12.75         12.75         12.75         12.75         12.75         12.75         12.75         12.75         12.75         12.83         12.83         12.83         12.83         12.83         12.83         12.83         12.83         18.75 <th< td=""><td></td><td>18.75</td><td>20.00</td><td>20.00</td><td>17.75</td><td>17.75</td><td>19.33</td><td>19.33</td><td>18.67</td><td>18.75</td><td>15.92</td><td>16.92</td></th<>		18.75	20.00	20.00	17.75	17.75	19.33	19.33	18.67	18.75	15.92	16.92
H25         15.83         12.75         12.67         12.75         12.75         12.83         12.83           ND         ND         ND         ND         ND         ND         ND         ND           ND         ND         ND         ND         ND         ND         ND         ND           19.75         18.75         19.75         19.75         19.75         19.75         18.83         18.75         18.75           19.75         18.75         19.75         19.75         17.67         18.83         18.75         18.75           19.75         18.75         16.00         14.83         16.00         14.83         16.75         16.75         16.00           10.50         9.75         11.75         11.75         11.75         11.67		17.75	16.92	19.67	17.75	18.00	17.67	17.58	17.67	17.75	18.92	19.92
ND         ND<		13.00	14.25	15.83	12.75	12.67	12.75	12.75	12.92	12.83	15.58	11.75
ND         ND<		ND ND	QN.	R	QN N	R	QN	N Q	Ð	QN N	R	ND ND
19.75       18.75       19.75       17.67       18.83       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.75       18.70       18.75       18.83       18.75 <td< td=""><td></td><td>ND</td><td>ND</td><td>QN</td><td><del>S</del></td><td>ND</td><td>QN</td><td>R</td><td>SP.</td><td>QN</td><td>ND</td><td>ND</td></td<>		ND	ND	QN	<del>S</del>	ND	QN	R	SP.	QN	ND	ND
13.83         13.67         16.00         14.83         16.75         15.92         16.00           10.50         9.75         13.67         13.67         11.75         11.67         11.67           13.83         13.25         13.83         13.83         13.75         14.75         14.50         14.33           11.83         11.83         10.67         10.67         9.75         10.58         10.58         10.58           12.42         13.50         16.83         17.50         17.83         17.67         17.42         17.42           14.83         14.67         13.83         13.75         13.08         13.92         13.75         13.83           16.58         17.67         14.75         14.75         14.92         14.17         14.75         14.67           16.83         15.83         14.75         14.67         14.67         14.67         14.67           16.50         15.67         13.75         13.75         13.83         13.83         13.83           16.50         15.67         13.75         13.75         13.75         13.83         13.83           13.75         13.75         13.75         13.75         17.67		18.83	19.75	18.75	19.75	19.75	17.67	18.83	18.75	18.75	14.75	15.58
10.50       9.75       13.67       11.75       11.75       11.67       11.67         13.83       13.83       13.75       14.75       14.50       14.33         11.83       10.67       10.67       9.75       10.58       10.58         11.83       10.67       10.67       9.75       10.58       10.58         12.42       13.50       16.83       17.50       17.83       17.67       17.50       17.42         14.83       14.67       13.83       13.75       13.83       15.83       15.83       15.83       15.83         16.50       14.75       14.75       14.75       14.67       14.67       14.67       14.67         16.83       15.83       14.75       14.75       14.67       14.67       14.67       14.67         16.50       9.75       9.67       8.83       9.67       9.67       8.75       8.58       6.75       6.75         16.50       15.67       13.75       13.75       13.75       13.83       13.83       13.83         13.75       13.67       17.75       17.75       17.75       17.75       17.75         14.67       13.83       17.75       17.75		15.92	13.83	13.67	16.00	16.00	14.83	16.75	15.92	16.00	15.50	17.75
13.83       13.83       13.83       13.75       14.75       14.50       14.33         11.83       10.67       10.67       9.75       10.58       10.58       10.58         12.42       13.50       16.83       17.50       17.83       17.67       17.50       17.42         14.83       14.67       13.83       13.75       13.08       13.92       13.75       13.83         16.58       17.67       15.83       15.75       15.58       15.50       15.83       15.83         16.50       14.75       14.75       14.07       14.67       14.67       14.67         16.50       9.75       9.67       9.67       9.67       9.67       9.67         16.50       15.67       13.75       13.75       13.75       13.75       13.83       13.83         16.50       15.67       17.75       17.75       17.75       17.75       17.75         18.75       13.75       17.75       17.67       17.67       17.67		11.67	10.50	9.75	13.67	13.67	11.75	11.75	11.67	11.67	13.75	11.75
11.83       10.67       10.67       9.75       10.58       10.58       10.58         12.42       13.50       16.83       17.50       17.83       17.67       17.50       17.42         14.83       14.67       13.83       13.75       13.08       13.92       13.75       13.83         16.58       17.67       15.83       15.75       15.58       15.83       15.83       15.83         16.83       17.67       14.75       14.75       14.67       14.67       14.67       14.67         16.83       15.83       14.75       14.75       14.67       14.67       14.67       14.67         16.50       9.75       9.67       9.67       8.83       9.67       9.67       14.67         16.50       15.67       13.75       13.75       13.75       13.83       13.83         16.50       5.92       6.83       8.75       8.58       6.75       6.75         ND       ND       ND       ND       ND       ND       ND       ND       17.75       17.67         14.67       13.83       17.75       17.75       15.75       17.67       17.67       17.67		14.67	13.83	13.25	13.83	13.83	13.75	14.75	14.50	14.33	11.58	N/A
12.42       13.50       16.83       17.50       17.83       17.67       17.67       17.83       17.42         14.83       14.67       13.83       13.75       13.08       13.92       13.75       13.83         16.58       17.67       15.83       15.75       15.58       15.83       15.83       15.83         15.00       14.75       14.75       14.75       14.67       14.67       14.67       14.67         16.83       15.83       14.75       14.75       14.67       14.67       14.67         10.50       9.75       9.67       9.67       9.67       N/A         16.50       15.67       13.75       13.75       13.83       13.83         16.50       5.83       6.92       6.83       8.75       8.58       6.75       6.75         ND       ND       ND       ND       ND       ND       ND       ND       ND         14.67       13.75       17.75       17.75       15.67       17.67       17.67	. 7	10.58	11.83	11.83	10.67	10.67	9.75	10.58	10.58	10.58	29.6	9.92
14.83       14.67       13.83       13.75       13.08       13.92       13.75       13.83         16.58       17.67       15.83       15.75       15.58       15.83       15.83       15.83         15.00       14.75       14.75       14.75       14.92       14.17       14.75       14.75         16.83       15.83       14.75       14.67       14.67       14.67       14.67         10.50       9.75       9.67       9.67       9.67       9.67       9.67         16.50       15.67       13.75       13.75       13.75       13.83       13.83         16.50       5.83       6.92       6.83       8.75       8.58       6.75       6.75         13.75       13.75       17.75       17.75       17.75       17.75       17.75         ND       ND       ND       ND       ND       ND       ND       ND         14.67       13.83       17.75       17.75       15.67       17.67       17.67	. 7	17.50	12.42	13.50	16.83	17.50	17.83	17.67	17.50	17.42	17.75	18.83
16.58       17.67       15.83       15.75       15.58       15.50       15.83       15.83       15.83         15.00       14.75       14.75       14.92       14.17       14.75       14.67       14.67       14.67       14.67         16.83       15.83       14.75       14.67       14.67       14.67       14.67       14.67         10.50       9.75       9.67       9.67       9.67       N/A         16.50       15.67       13.75       13.75       13.75       13.83       13.83         16.50       5.92       5.83       8.75       8.58       6.75       6.75       6.75         13.75       13.75       17.75       17.75       17.75       17.75       17.75         14.67       13.83       17.75       17.75       15.75       17.67       17.67		13.83	14.83	14.67	13.83	13.75	13.08	13.92	13.75	13.83	11.92	14.67
15.00       14.75       14.75       14.92       14.17       14.75       14.75       14.75       14.67 <td< td=""><td></td><td>15.92</td><td>16.58</td><td>17.67</td><td>15.83</td><td>15.75</td><td>15.58</td><td>15.50</td><td>15.83</td><td>15.83</td><td>16.58</td><td>17.67</td></td<>		15.92	16.58	17.67	15.83	15.75	15.58	15.50	15.83	15.83	16.58	17.67
16.83       15.83       14.75       14.67 <td< td=""><td>. 7</td><td>14.75</td><td>15.00</td><td>14.75</td><td>14.75</td><td>14.75</td><td>14.92</td><td>14.17</td><td>14.75</td><td>14.75</td><td>14.75</td><td>14.83</td></td<>	. 7	14.75	15.00	14.75	14.75	14.75	14.92	14.17	14.75	14.75	14.75	14.83
10.50       9.75       9.67       8.83       9.67       9.67       N/A         16.50       15.67       13.75       13.75       13.83       13.83       13.83         5.92       5.83       6.92       6.83       8.75       8.58       6.75       6.75         13.75       13.75       17.75       17.75       20.00       20.00       17.75       17.75         ND       ND       ND       ND       ND       ND       ND       ND         14.67       13.83       17.75       17.75       15.75       15.67       17.67       17.67		14.67	16.83	15.83	14.75	14.75	14.67	14.67	14.67	14.67	14.58	14.83
16.50       15.67       13.75       13.75       13.75       13.75       13.83       13.83       13.83         5.92       5.83       6.92       6.83       8.75       8.58       6.75       6.75         13.75       13.67       17.75       17.75       20.00       20.00       17.75       17.75         ND       ND       ND       ND       ND       ND       ND         14.67       13.83       17.75       17.75       15.75       15.67       17.67       17.67		9.75	10.50	9.75	29.6	29.6	8.83	29.6	19.6	N/A	7.83	8.50
5.92       5.83       6.92       6.83       8.75       8.58       6.75       6.75       6.75         13.75       13.75       17.75       17.75       20.00       20.00       17.75       17.75       17.75         ND       ND       ND       ND       ND       ND       ND       ND         14.67       13.83       17.75       17.75       15.75       15.67       17.67       17.67		13.83	16.50	15.67	13.75	13.75	13.75	13.75	13.83	13.83	12.83	15.42
13.75         13.67         17.75         17.75         20.00         20.00         17.75         17.75           ND         ND         ND         ND         ND         ND         ND           14.67         13.83         17.75         17.75         15.75         15.67         17.67         17.67		6.75	5.92	5.83	6.92	6.83	8.75	8.58	6.75	6.75	6.92	7.58
ND N		17.75	13.75	13.67	17.75	17.75	20.00	20.00	17.75	17.75	15.58	N/A
14.67 13.83 17.75 17.75 15.75 15.67 17.67		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
		17.58	14.67	13.83	17.75	51.71	15.75	15.67	17.67	17.67	15.83	16.67

	Quad	Cluster	10.92	13.75	ND	ND	14.75	11.83	ND	9.83	80.6	8.83	8.83	28.00	sed in the
	Quad	Avg	14.75	11.75	ND	ND	12.75	11.67	ND	19.6	11.00	10.67	10.83	26.75	have two or less members. ND indicates that the flexible pavement design used in the
	Tri	Cluster	12.75	12.83	QN	ON	14.75	10.83	ND	10.83	9.42	7.92	8.92	26.83	xible paven
	Tri Ava	g,v III	12.75	12.83	QN	QN	14.75	10.83	QN	10.83	05.6	7.92	8.92	26.83	s that the fle
ont'd)	Tan	Cluster	11.75	11.50	PA PA	ND	14.75	11.00	ND	10.75	9:28	8.67	9.42	26.08	ID indicates
Table B-13. (cont'd)	Tan Ava	IanAvg	11.75	11.92	N N	ND ND	12.83	10.92	ND ND	10.92	9.92	8.83	8.83	23.83	members. N
Tab	SA	Cluster	12.42	13.75	ND ND	ND ND	14.67	10.83	QN	11.17	29.6	7.92	29.6	25.67	wo or less 1
	SA	Avg	12.58	13.83	ND	ON	14.67	10.83	QN	11.50	29.6	8.08	29.6	25.92	
	TTC	Cluster	12.75	11.75	ND	ND	13.67	10.00	<del>S</del>	10.75	9.75	8.67	6.83	16.58	lusters wh
	TTC	Avg	13.75	11.67	ND	ND	12.92	10.75	QN	10.75	9.75	8.67	7.67	15.42	s sites in c
	Cont	COIII.	12.83	12.83	ND	ND	14.75	10.83	ND	10.83	9.33	7.92	8.92	26.83	*Note N/A excludes sites in clusters which
	Site	No.	8029	8049	8129	8209	8219	8229	8440	8729	8829	6816	9209	9759	*Note N/

analysis could not produce usable distress data for comparison. M indicates week or continuous data was missing.

# **AADTT Clustering**

Table B-14. Low AADTT Group

Low Tr	raffic (1)
Site	AADTT
2209	88
6019	112
6309	123
4229	151
2029	201
7329	237
8440	277
1529	295
9759	321
4249	326
1459	358
4129	386
8129	412
7069	431
2229	436
4049	523
4149	669
8029	809
5019	833
6429	846
6479	899
5289	975
7109	976

Table B-15. Medium AADTT Group

Medium	Traffic 2)
Site	AADTT
5249	1222
5059	1425
6469	1452
6129	1548
6369	1695
8049	1809
8229	1881
8219	1895
5299	2188
8829	2236
9189	2781
8209	2802

Table B-16. High AADTT Group

High Traffic (3)	
Site	AADTT
9799	3050
7269	3101
9209	3106
8729	3171
7029	3569
7159	5435

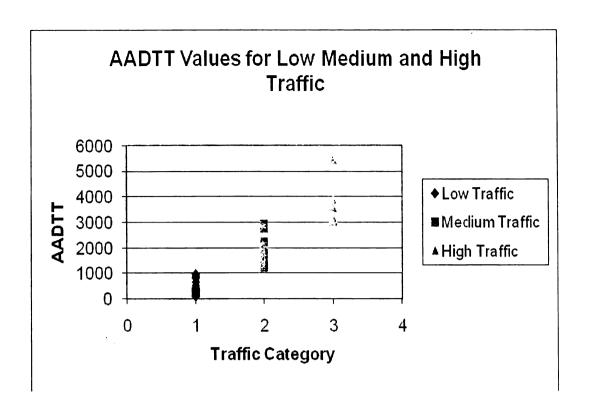


Figure B-1. AADTT Cluster Groupings

### TTC Clustering

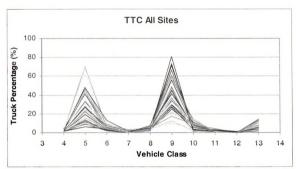


Figure B-2. TTCs for all Analyzed Sites

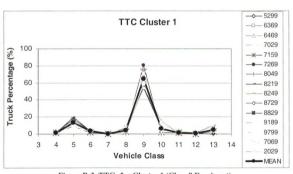


Figure B-3. TTCs for Cluster 1 (Class 9 Dominant)

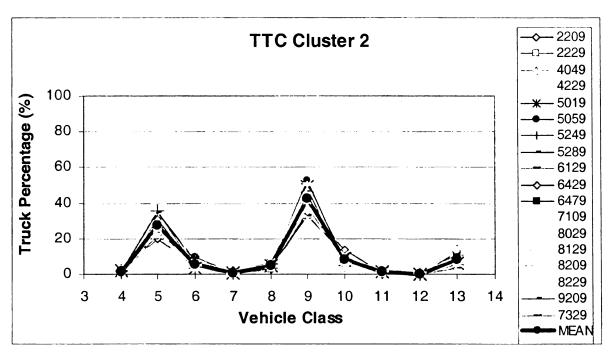


Figure B-4. TTCs for Cluster 2 (Even Dominance)

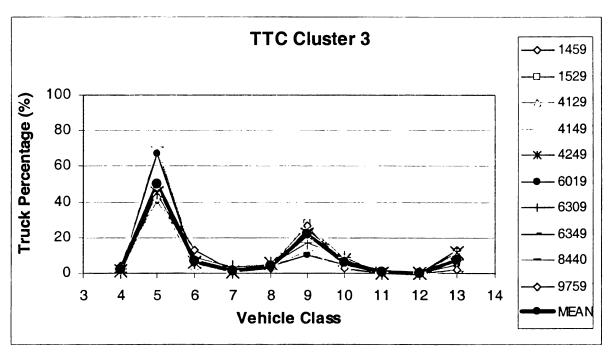


Figure B-5. TTCs for Cluster 3 (Class 5 Dominant)

### VC 4-7 MDFs Clustering

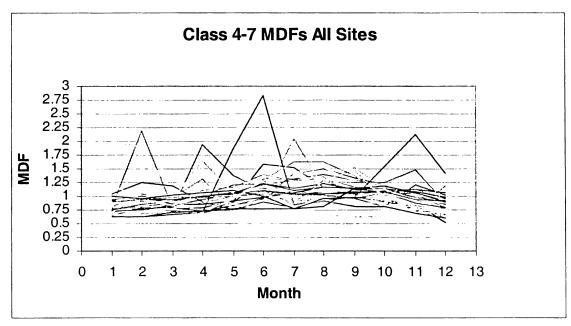


Figure B-6. VC 4-7 MDFs for all Analyzed Sites

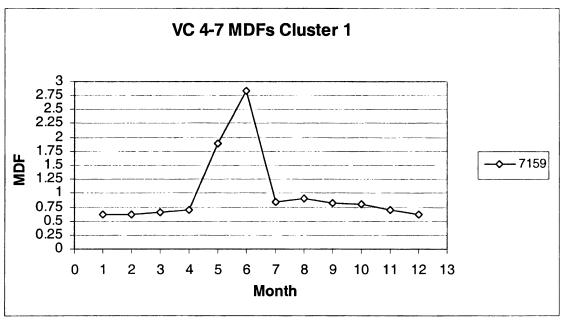


Figure B-7. VC 4-7 MDFs for Cluster 1 (Month 6 Dominant)

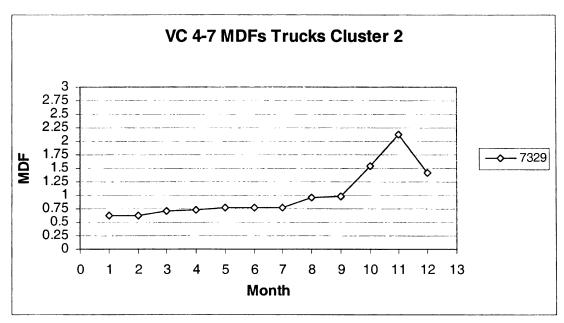


Figure B-8. VC 4-7 MDFs for Cluster 2 (Month 11 Dominant)

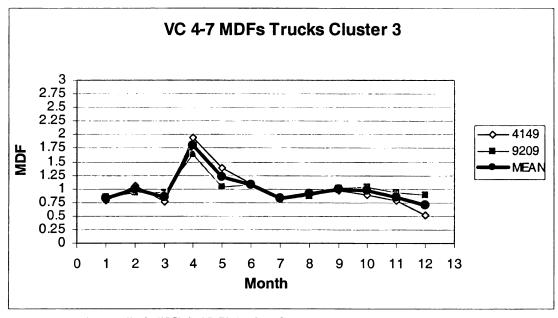


Figure B-9. VC 4-7 MDFs for Cluster 3 (Month 4 Dominant)

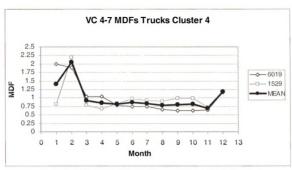


Figure B-10. VC 4-7 MDFs for Cluster 4 (Month 2 Dominant)

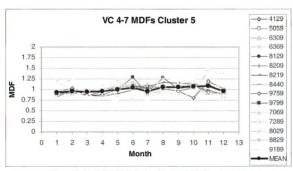


Figure B-11. VC 4-7 MDFs for Cluster 5 (No Dominance)

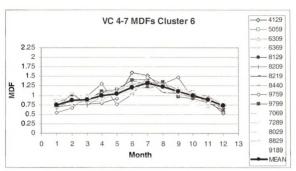


Figure B-12. VC 4-7 MDFs for Cluster 6 (Summer Dominant)

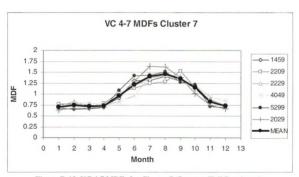


Figure B-13. VC 4-7 MDFs for Cluster 7 (Summer/Fall Dominant)

### VC 8-10 MDFs Clustering

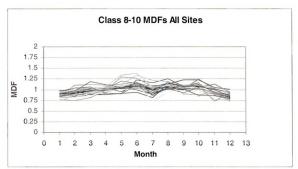


Figure B-14. VC 8-10 MDFs for all Analyzed Sites

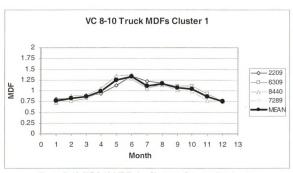


Figure B-15. VC 8-10 MDFs for Cluster 1 (Summer Dominant)

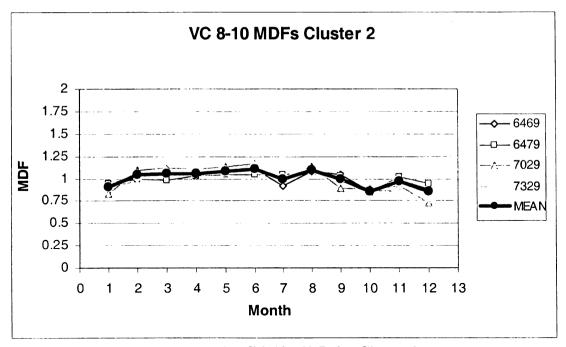


Figure B-16. VC 8-10 MDFs for Cluster 2

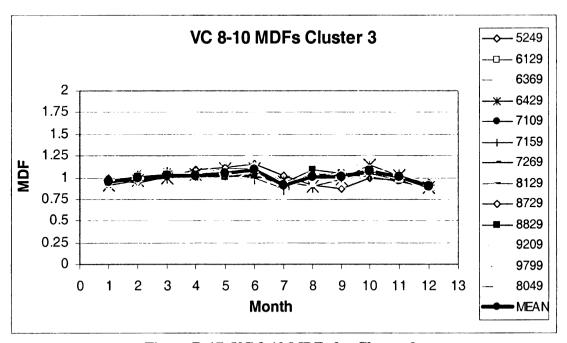


Figure B-17. VC 8-10 MDFs for Cluster 3

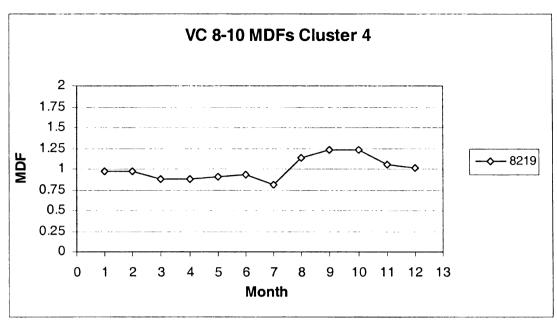


Figure B-18. VC 8-10 MDFs for Cluster 4 (Fall Dominant)

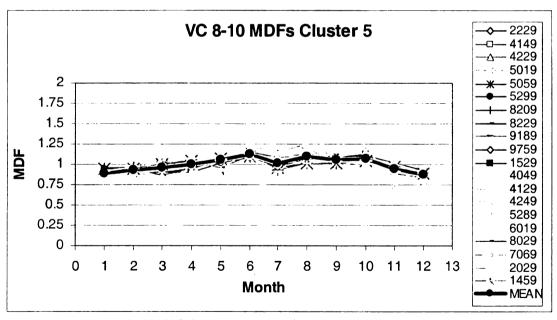


Figure B-19. VC 8-10 MDFs for Cluster 5 (Even Dominance)

## VC 11-13 MDFs Clustering

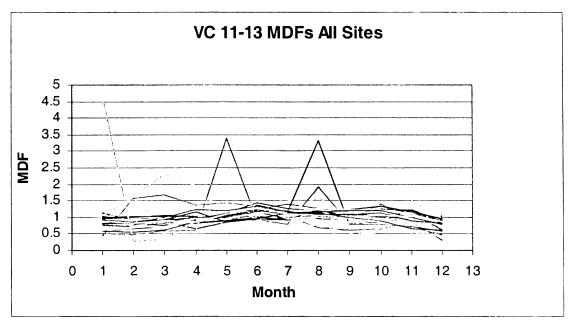


Figure B-20. VC 11-13 MDFs for all Analyzed Sites

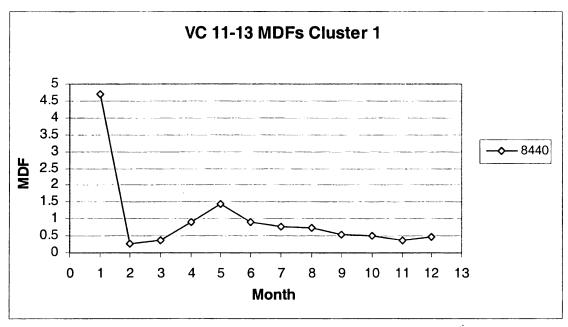


Figure B-21. VC 11-13 MDFs for Cluster 1 (Month 1 Dominant)

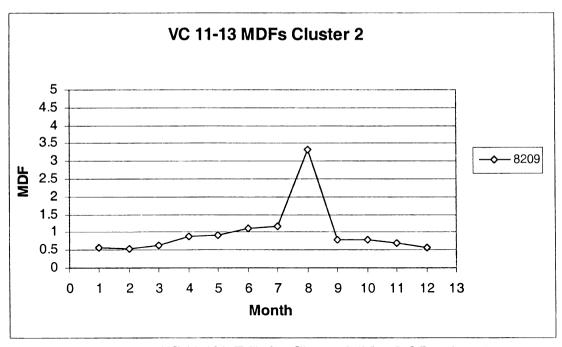


Figure B-22. VC 11-13 MDFs for Cluster 2 (Month 8 Dominant)

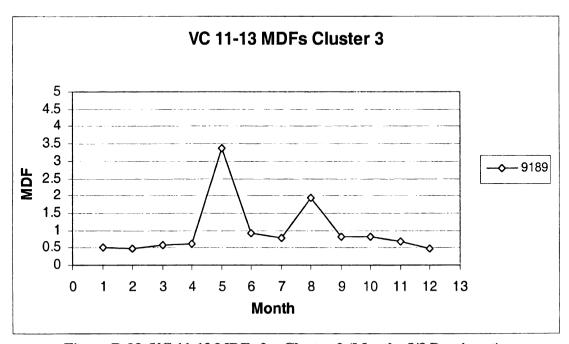


Figure B-23. VC 11-13 MDFs for Cluster 3 (Months 5/8 Dominant)

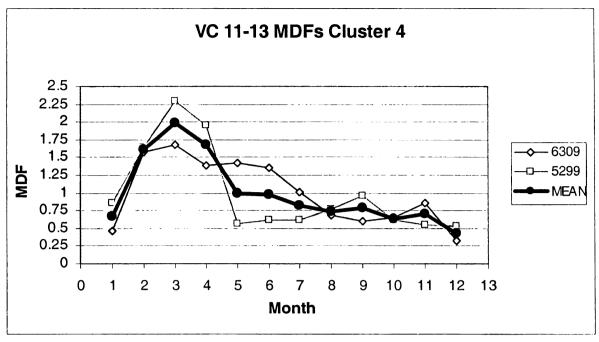


Figure B-24. VC 11-13 MDFs for Cluster 4 (Spring Dominant)

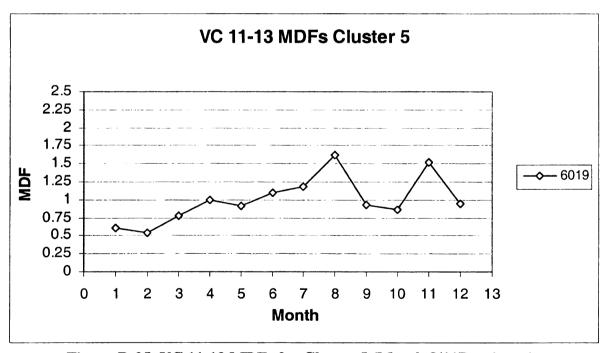


Figure B-25. VC 11-13 MDFs for Cluster 5 (Month 8/11Dominant)

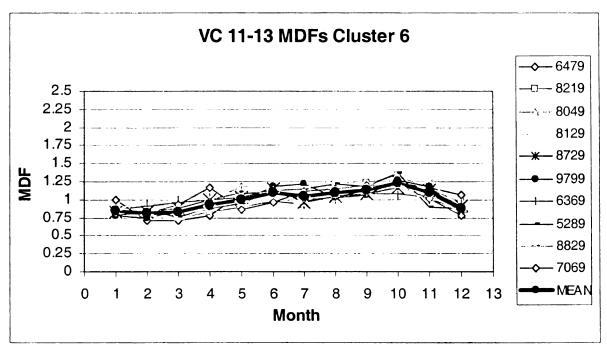


Figure B-26. VC 11-13 MDFs for Cluster 6 (No Dominance)

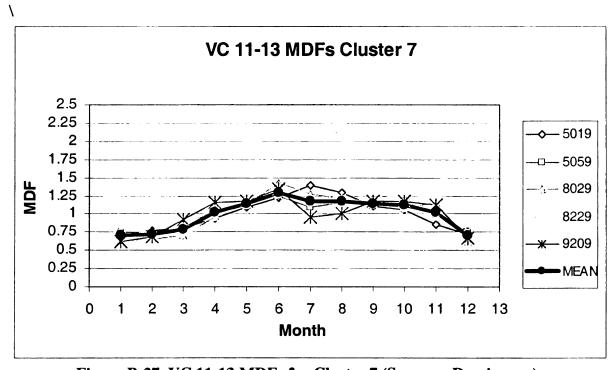


Figure B-27. VC 11-13 MDFs for Cluster 7 (Summer Dominance)

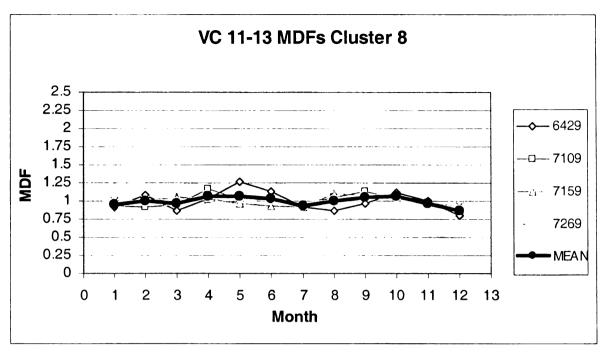


Figure B-28. VC 11-13 MDFs for Cluster 8 (No Dominance)

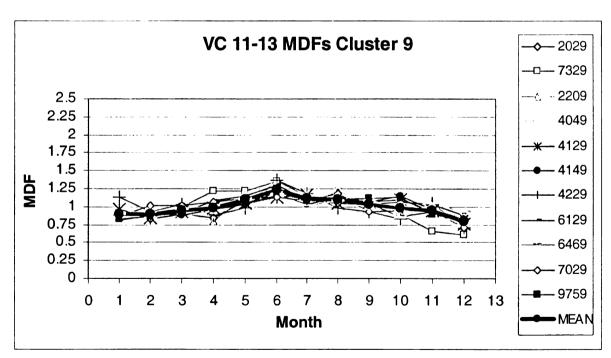


Figure B-29. VC 11-13 MDFs for Cluster 9 (Summer Dominance)

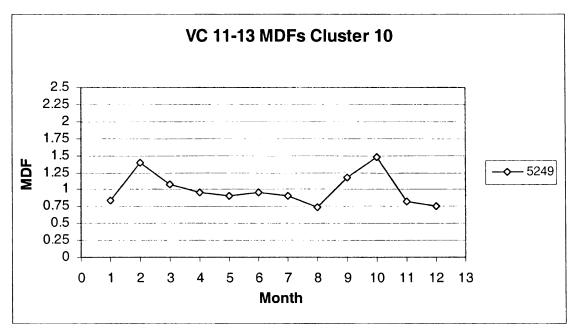


Figure B-30. VC 11-13 MDFs for Cluster 10 (Peak Months 2/10)

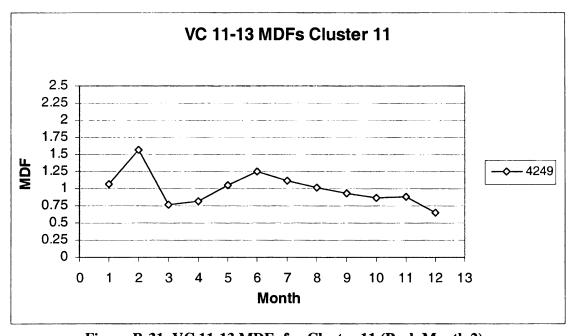


Figure B-31. VC 11-13 MDFs for Cluster 11 (Peak Month 2)

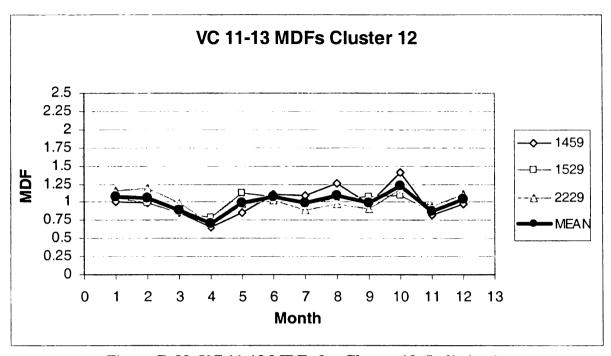


Figure B-32. VC 11-13 MDFs for Cluster 12 (Indistinct)

#### Hourly Distribution Factor Clustering

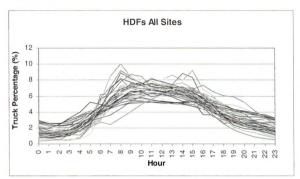


Figure B-33. HDFs for all Analyzed Sites

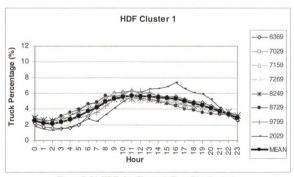


Figure B-34. HDFs for Cluster 1 (Even Distribution)

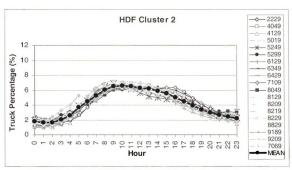


Figure B-35. HDFs for Cluster 2 (Morning Dominant)

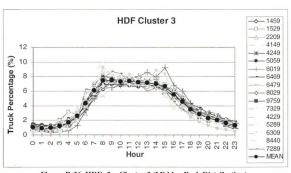


Figure B-36. HDFs for Cluster 3 (Midday Peak Distribution)

# **Appendix C**

Cluster Analysis Results-Single Axle Load Spectra

#### All Single Axle Load Spectra (LS) Clustering

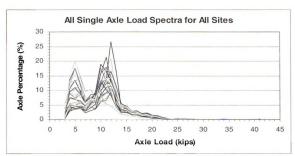


Figure C-1. All Single Axle LS for all Analyzed Sites

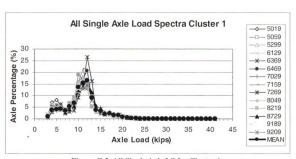


Figure C-2. All Single Axle LS for Cluster 1

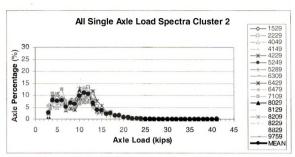


Figure C-3. All Single Axle LS for Cluster 2

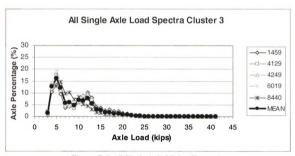


Figure C-4. All Single Axle LS for Cluster 3

## **Appendix D**

Cluster Analysis Results-Tandem Axle Load Spectra

#### All Tandem Axle LS Clustering

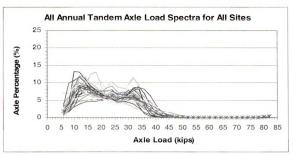


Figure D-1. All Tandem Axle LS for all Analyzed Sites

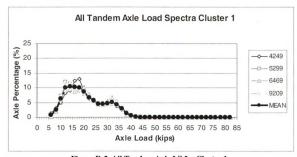


Figure D-2. All Tandem Axle LS for Cluster 1

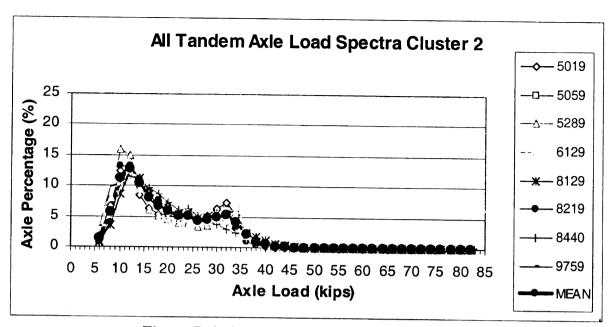


Figure D-3. All Tandem Axle LS for Cluster 2

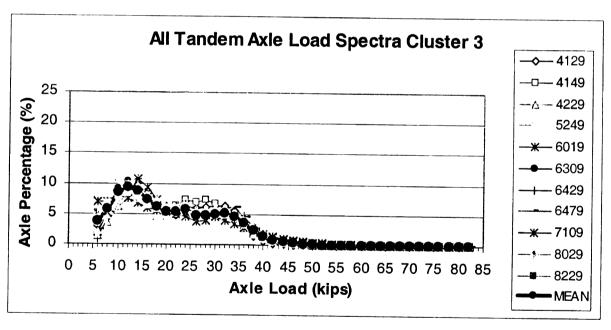


Figure D-4. All Tandem Axle LS for Cluster 3

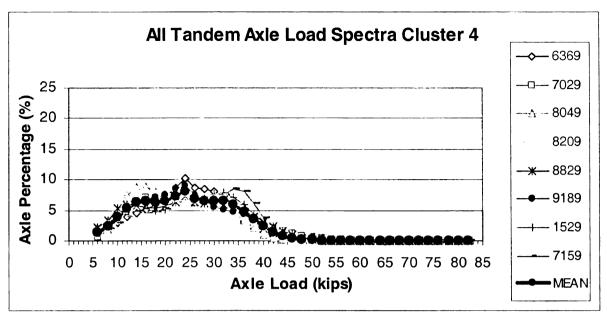


Figure D-5. All Tandem Axle LS for Cluster 4

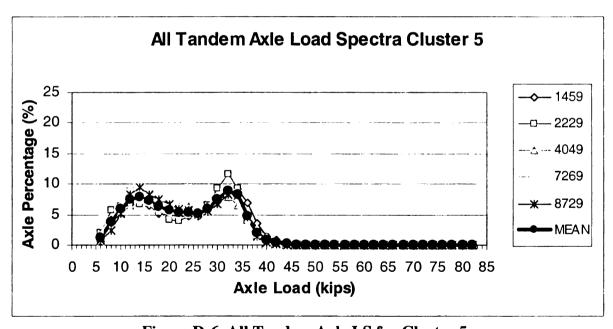


Figure D-6. All Tandem Axle LS for Cluster 5

### **Appendix E**

Cluster Analysis Results-Tridem Axle Load Spectra

### All Tridem Axle LS Clustering

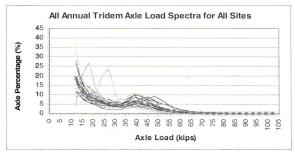


Figure E-1. All Tridem Axle LS for all Analyzed Sites

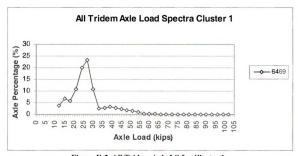


Figure E-2. All Tridem Axle LS for Cluster 1

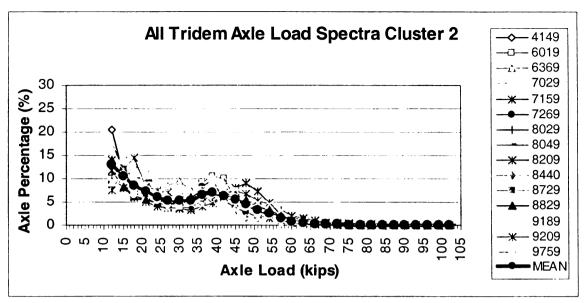


Figure E-3. All Tridem Axle LS for Cluster 2

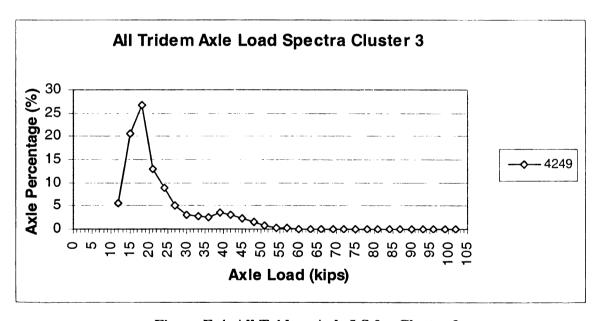


Figure E-4. All Tridem Axle LS for Cluster 3


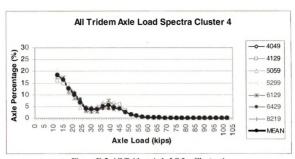


Figure E-5. All Tridem Axle LS for Cluster 4

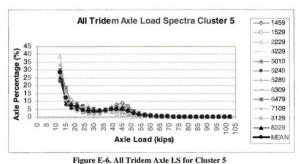

## **Appendix F**

Cluster Analysis Results-Quad Axle Load Spectra

#### All Quad Axle LS Clustering

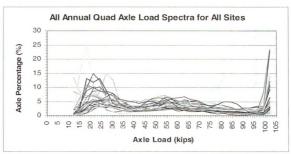


Figure F-1. All Quad Axle LS for all Analyzed Sites

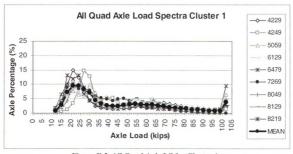


Figure F-2. All Quad Axle LS for Cluster 1

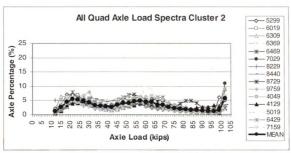


Figure F-3. All Quad Axle LS for Cluster 2

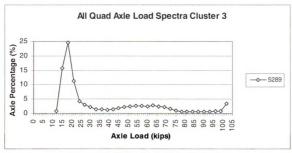


Figure F-4. All Quad Axle LS for Cluster 3

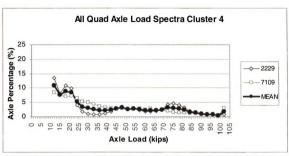


Figure F-5. All Quad Axle LS for Cluster 4

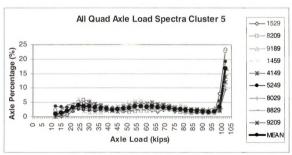


Figure F-6. All Quad Axle LS for Cluster 5

## Appendix G

Statewide Axle Load Spectra vs. M-E PDG Defaults

### Comparison Between Statewide Single Axle LS and M-E PDG Default Values for All VCs

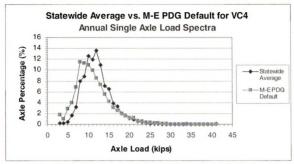


Figure G-1. State Avg. vs. M-E PDG Default for Single VC4 LS

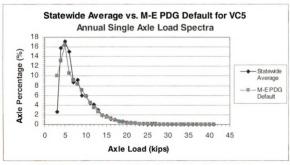


Figure G-2. State Avg. vs. M-E PDG Default for Single VC5 LS

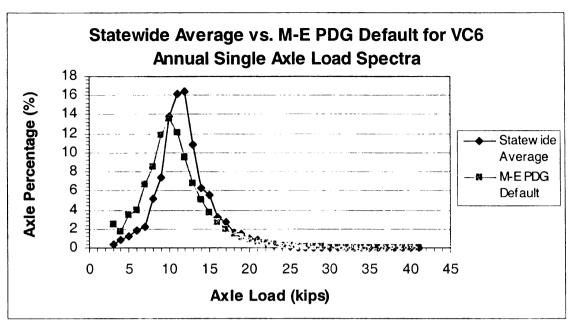


Figure G-3. State Avg. vs. M-E PDG Default for Single VC6 LS

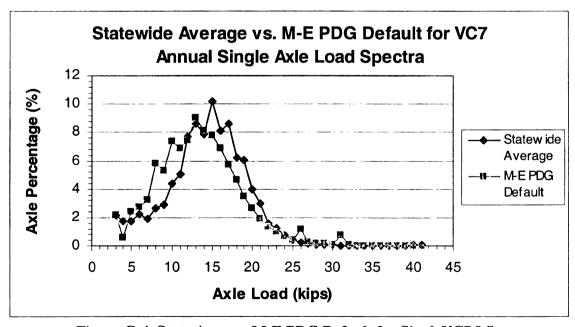


Figure G-4. State Avg. vs. M-E PDG Default for SingleVC7 LS

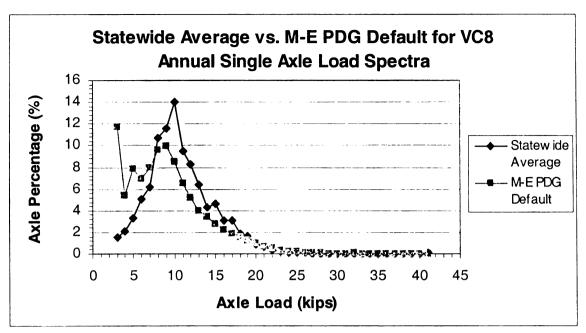


Figure G-5. State Avg. vs. M-E PDG Default for Single VC8 LS

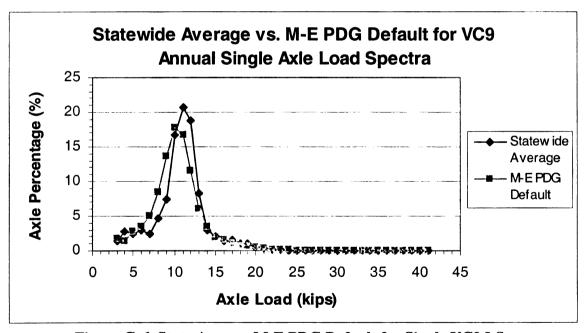


Figure G-6. State Avg. vs. M-E PDG Default for Single VC9 LS

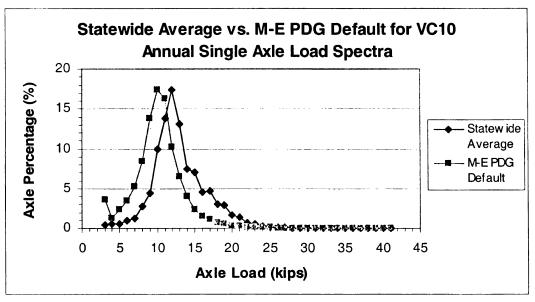


Figure G-7. State Avg. vs. M-E PDG Default for Single VC10 LS

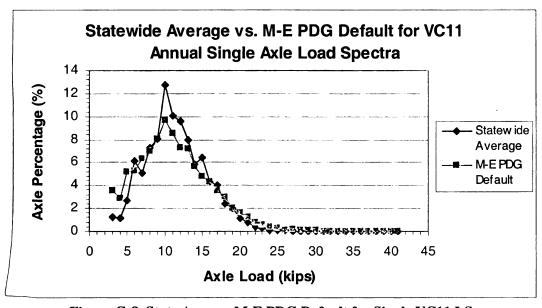


Figure G-8. State Avg. vs. M-E PDG Default for Single VC11 LS

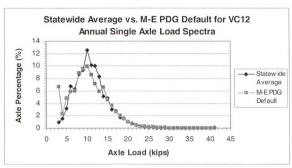


Figure G-9. State Avg. vs. M-E PDG Default for Single VC12 LS

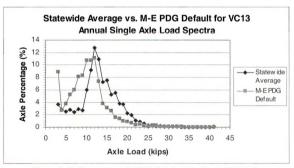


Figure G-10. State Avg. vs. M-E PDG Default for Single VC13 LS

### Comparison Between Statewide Tandem Axle LS and M-E PDG Default Values for All VCs

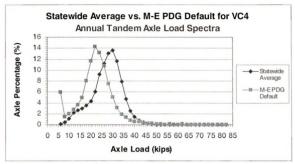


Figure G-11. State Avg. vs. M-E PDG Default for TandemVC4 LS

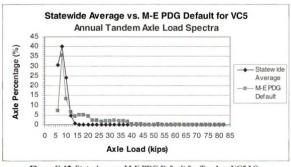


Figure G-12. State Avg. vs. M-E PDG Default for Tandem VC5 LS

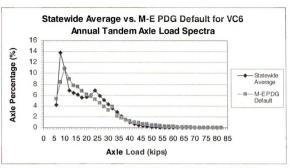


Figure G-13. State Avg. vs. M-E PDG Default for TandemVC6 LS

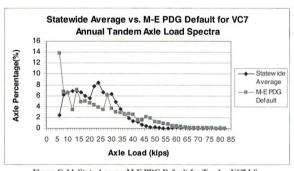


Figure G-14. State Avg. vs. M-E PDG Default for TandemVC7 LS

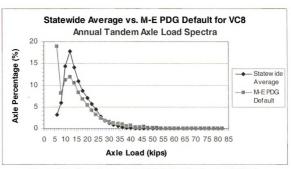


Figure G-15. State Avg. vs. M-E PDG Default for Tandem VC8 LS

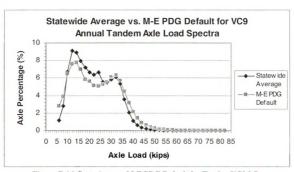


Figure G-16. State Avg. vs. M-E PDG Default for TandemVC9 LS

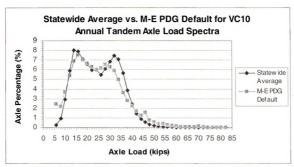


Figure G-17. State Avg. vs. M-E PDG Default for TandemVC10 LS

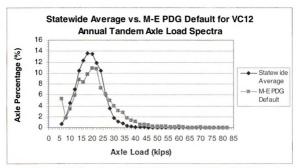


Figure G-18. State Avg. vs. M-E PDG Default for TandemVC12 LS

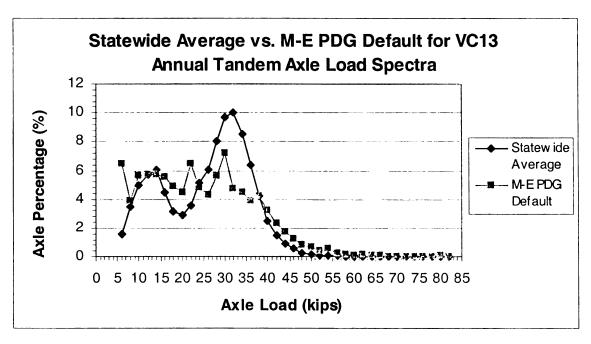


Figure G-19. State Avg. vs. M-E PDG Default for Tandem VC13 LS

# Comparison Between Statewide Tridem Axle LS and M-E PDG Default Values for All VCs

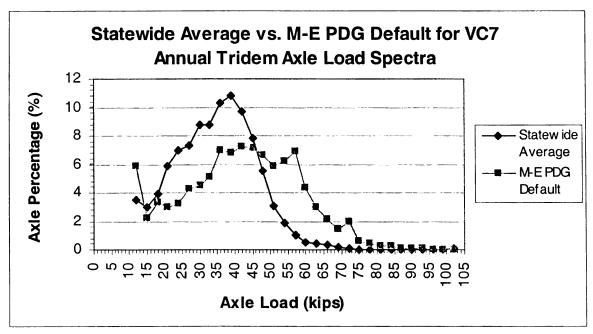


Figure G-20. State Avg. vs. M-E PDG Default for Tridem VC7 LS

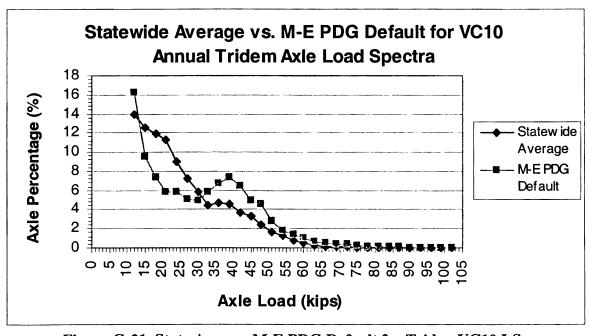


Figure G-21. State Avg. vs. M-E PDG Default for TridemVC10 LS

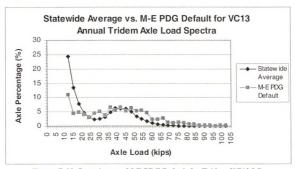


Figure G-22. State Avg. vs. M-E PDG Default for Tridem VC13 LS

# Comparison Between Statewide Quad Axle LS and M-E PDG Default Values for All VCs

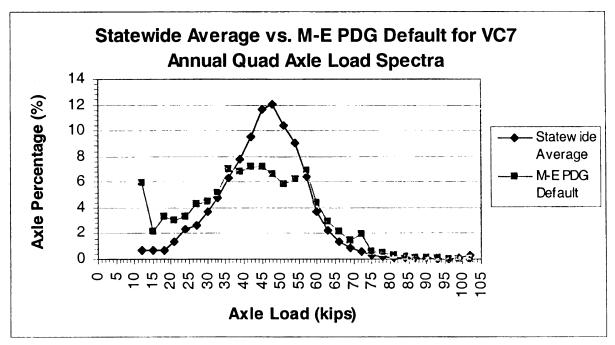


Figure G-23. State Avg. vs. M-E PDG Default for Quad VC7 LS

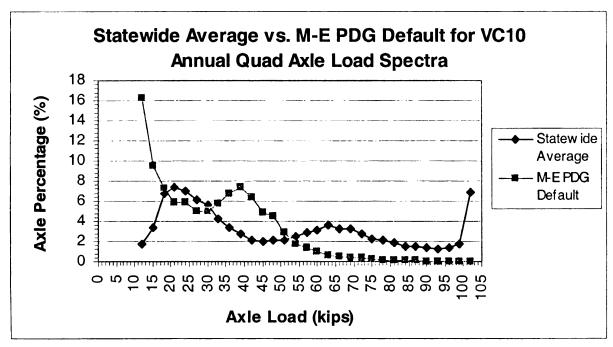


Figure G-24. State Avg. vs. M-E PDG Default for QuadVC10 LS

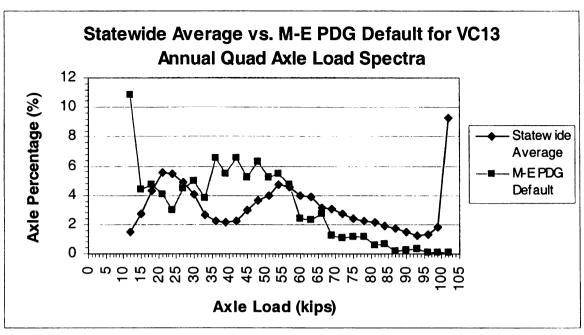


Figure G-25. State Avg. vs. M-E PDG Default for Quad VC13 LS

# **Appendix H**

Traffic Characterization Design Values

# Truck Traffic Classification Design Values

Table H-1. Statewide and Cluster Averages for Truck Traffic Classification

	Cluster 1	Cluster 2	Cluster 3	Statewide Average
4	1.66	1.68	2.08	1.76
5	13.01	27.35	49.78	27.37
6	3.27	5.57	6.62	5.01
7	0.33	0.95	1.09	0.77
8	3.86	4.93	4.27	4.42
9	64.35	42.39	22.08	45.43
10	6.42	7.90	6.43	7.07
11	1.59	1.11	0.41	1.12
12	0.41	0.17	0.04	0.22
13	5.11	7.95	7.20	6.82

### Monthly Distribution Factor Design Values

Table H-2. Statewide Monthly Distribution Factors (All Classes)

Month	VC4	VC5	VC6	VC7	VC8	VC9	VC10	VC11	VC12	VC13
1	0.81	0.81	0.81	0.81	0.90	0.90	0.90	0.87	0.87	0.87
2	0.89	0.89	0.89	0.89	0.95	0.95	0.95	0.89	0.89	0.89
3	0.88	0.88	0.88	0.88	0.98	0.98	0.98	0.88	0.88	0.88
4	0.93	0.93	0.93	0.93	1.01	1.01	1.01	0.96	0.96	0.96
5	1.02	1.02	1.02	1.02	1.06	1.06	1.06	1.05	1.05	1.05
6	1.14	1.14	1.14	1.14	1.12	1.12	1.12	1.16	1.16	1.16
7	1.18	1.18	1.18	1.18	0.98	0.98	0.98	1.07	1.07	1.07
8	1.19	1.19	1.19	1.19	1.08	1.08	1.08	1.10	1.10	1.10
9	1.13	1.13	1.13	1.13	1.03	1.03	1.03	1.07	1.07	1.07
10	1.06	1.06	1.06	1.06	1.05	1.05	1.05	1.11	1.11	1.11
11	0.96	0.96	0.96	0.96	0.96	0.96	0.96	1.00	1.00	1.00
12	0.82	0.82	0.82	0.82	0.87	0.87	0.87	0.83	0.83	0.83

\*Note M-E PDG Default is 1

Table H-3. Cluster Average Monthly Distribution Factors for VC 4-7

Month	Cluster 1	Cluster 2	Cluster 3
1	0.93	0.75	0.70
2	0.96	0.87	0.75
3	0.94	0.88	0.71
4	0.95	0.99	0.73
5	1.00	1.05	0.96
6	1.04	1.22	1.22
7	0.96	1.31	1.40
8	1.05	1.23	1.46
9	1.05	1.10	1.35
10	1.07	0.99	1.15
11	1.09	0.88	0.83
12	0.95	0.73	0.74

Table H-4. Cluster Average Monthly Distribution Factors for VC 8-10

Month	Cluster 1	Cluster 2	Cluster 3	Cluster 4
1	0.770	0.903	0.948	0.889
2	0.820	1.044	0.989	0.925
3	0.867	1.050	1.022	0.963
4	0.990	1.057	1.024	1.000
5	1.249	1.085	1.047	1.053
6	1.327	1.110	1.083	1.121
7	1.109	0.988	0.907	1.013
8	1.159	1.094	1.006	1.104
9	1.062	0.990	1.000	1.049
10	1.038	0.858	1.070	1.069
11	0.860	0.971	1.005	0.943
12	0.748	0.851	0.900	0.870

Table H-5. Cluster Average Monthly Distribution Factors for VC 11-13

Month	Cluster 1	Cluster 2	Cluster 3	Cluster 4	Cluster 5
1	0.85	0.70	0.96	0.90	1.08
2	0.81	0.72	1.00	0.89	1.06
3	0.83	0.79	0.97	0.94	0.90
4	0.94	1.02	1.07	0.98	0.71
5	1.00	1.13	1.06	1.09	0.98
6	1.10	1.30	1.03	1.23	1.07
7	1.04	1.18	0.93	1.11	0.98
8	1.10	1.18	1.00	1.10	1.10
9	1.13	1.14	1.05	1.03	0.98
10	1.24	1.12	1.07	0.99	1.22
11	1.09	1.02	0.97	0.95	0.88
12	0.87	0.71	0.87	0.79	1.04

## Hourly Distribution Factor Design Values

Table H-6. Statewide, Cluster and M-E PDG Default Monthly Distribution Factors

	Cluster 1	Cluster 2	Cluster 3	Statewide Avg.	M-E PDG Default
0	2.52	1.78	1.05	1.62	2.30
1	2.22	1.64	0.89	1.45	2.30
2	2.11	1.66	0.97	1.46	2.30
3	2.33	2.00	1.22	1.75	2.30
4	2.67	2.59	1.74	2.27	2.30
5	3.11	3.68	2.60	3.16	2.30
6	3.71	4.49	4.32	4.29	5.00
7	4.16	5.24	6.08	5.38	5.00
8	4.91	6.06	7.42	6.39	5.00
9	5.32	6.51	7.43	6.67	5.00
10	5.58	6.60	7.33	6.71	5.90
11	5.68	6.50	7.41	6.71	5.90
12	5.60	6.31	7.24	6.55	5.90
13	5.58	6.16	7.12	6.44	5.90
14	5.48	5.89	6.97	6.24	5.90
15	5.36	5.54	6.62	5.93	5.90
16	5.33	5.01	5.49	5.25	4.60
17	4.98	4.44	4.54	4.57	4.60
18	4.70	3.94	3.46	3.88	4.60
19	4.48	3.39	2.82	3.35	4.60
20	4.13	2.95	2.30	2.90	3.10
21	3.75	2.64	2.00	2.58	3.10
22	3.37	2.42	1.63	2.27	3.10

### Axle Groups per Vehicle Design Values

Table H-7. Statewide, Cluster and M-E PDG Default Single Axle Groups per Vehicle

VC	Cluster 1	Cluster 2	Cluster 3	Statewide Avg.	M-E PDG Default
4	1.76	1.64	1.61	1.65	1.62
5	2.00	2.01	2.00	2.00	2
6	1.00	1.00	1.00	1.00	1.02
7	1.07	1.08	1.05	1.06	1
8	2.28	2.30	2.26	2.28	2.38
9	1.20	1.26	1.32	1.29	1.13
10	1.43	1.49	1.61	1.54	1.19
11	5.00	4.99	4.99	4.99	4.29
12	4.05	3.98	3.99	3.85	3.52
13	1.61	2.70	2.09	2.03	2.15

Table H-8. Statewide, Cluster and M-E PDG Default Tandem Axle Groups per Vehicle

VC	Cluster 1	Cluster 2	Cluster 3	Statewide	M-E PDG
VC	Cluster	Cluster 2	Cluster 3	Avg.	Default
4	0.21	0.30	0.60	0.36	0.39
5	0.02	0.05	0.07	0.05	0
6	1.00	1.00	1.00	1.00	0.99
7	0.06	0.06	0.06	0.06	0.26
8	0.77	0.78	0.69	0.74	0.67
9	1.89	1.87	1.77	1.85	1.93
10	0.96	1.02	1.00	1.00	1.09
11	0.00	0.01	0.00	0.00	0.26
12	0.99	1.00	1.08	0.96	1.14
13	1.16	1.54	1.49	1.40	2.13

Table H-9. Statewide, Cluster and M-E PDG Default Tridem Axle Groups per Vehicle

VC	Cluster 1	Cluster 2	Cluster 3	Cluster 4	Statewide	M-E PDG
	Clusici I	Clusici 2	Clusici 5	Clusici 4	Avg.	Default
4	0.00	0.00	0.00	0.00	0.00	0
5	0.00	0.00	0.00	0.00	0.00	0
6	0.00	0.00	0.00	0.00	0.00	0
7	0.58	0.72	0.63	0.45	0.59	0.83
8	0.00	0.00	0.00	0.00	0.00	0
9	0.00	0.01	0.00	0.01	0.00	0
10	0.30	0.29	0.64	0.31	0.31	0.89
11	0.00	0.00	0.00	0.00	0.00	0.06
12	0.00	0.00	0.00	0.00	0.00	0.06
13	0.28	0.41	0.51	0.48	0.36	0.35

Table H-10. Statewide, Cluster and M-E PDG Default Quad Axle Groups per Vehicle

VC	Cluster	Cluster	Cluster	Cluster	Cluster	Statewide	M-E PDG
VC	1	2	3	4	5	Avg.	Default
4	0.00	0.00	0.00	0.00	0.00	0.00	0
5	0.00	0.00	0.00	0.00	0.00	0.00	0
6	0.00	0.00	0.00	0.00	0.00	0.00	0
7	0.31	0.30	0.17	0.45	0.40	0.35	0
8	0.00	0.00	0.00	0.00	0.00	0.00	0
9	0.00	0.00	0.00	0.00	0.00	0.00	0
10	0.19	0.54	0.59	0.68	0.51	0.56	0
11	0.00	0.00	0.00	0.00	0.00	0.00	0
12	0.00	0.01	0.00	0.00	0.00	0.00	0
13	0.43	0.85	0.59	0.69	0.58	0.61	0

Single Axle Load Spectra Design Values

Table H-11. Statewide Single Axle Load Spectra

					Vehicle Class	Class				
Load (kips)	4	2	9	7	<b>&amp;</b>	6	10	11	12	13
3	0.19	2.63	0.33	2.19	1.56	1.42	0.44	1.23	0.93	3.69
4	0.22	15.77	0.88	1.74	2.15	2.76	0.52	1.14	1.57	2.81
ß	0.48	17.16	1.22	1.77	3.32	2.48	0.56	2.66	3.14	2.50
9	1.65	15.08	1.81	2.23	5.07	2.88	96.0	6.12	6.75	2.82
7	3.15	8.65	2.18	1.91	6.18	2.47	1.24	5.05	6.29	2.41
8	7.91	9.15	5.14	2.65	10.68	4.72	2.76	7.28	8.68	2.86
6	8.85	5.93	7.38	2.87	11.56	7.33	4.36	8.05	9.41	2.73
10	12.59	5.89	13.84	4.35	14.11	16.74	86.6	12.82	12.69	6.00
11	11.91	4.38	16.11	5.04	9.46	20.72	13.74	10.09	10.09	9.20
12	13.73	4.09	16.50	7.72	8.24	18.78	17.48	9.60	10.07	12.80
13	10.92	3.00	10.85	8.58	6.43	8.21	13.12	8.00	8.35	10.01
14	7.02	1.86	6.30	7.88	4.31	2.89	7.45	5.85	5.11	7.23
15	6.56	1.75	5.55	10.34	4.58	2.04	7.10	6.43	4.82	7.55
16	3.91	1.09	3.18	8.10	3.05	1.30	4.59	4.31	3.01	5.21
17	3.33	1.03	2.71	8.62	3.05	1.55	4.67	4.01	2.81	5.54
18	1.97	0.63	1.62	6.23	1.91	1.12	3.05	2.38	1.76	3.78
19	1.69	09:0	1.47	6.04	1.65	1.06	2.89	2.06	1.51	3.66
20	1.09	0.37	0.94	3.96	0.89	0.57	1.65	1.11	1.03	2.24
21	0.92	0.34	0.82	3.00	69.0	0.41	1.35	0.81	0.75	1.91
22	0.53	0.19	0.44	1.61	0.36	0.20	89.0	0.38	0.46	1.06

Table H-11. (cont'd)

					Vehicle Class	Class				
Load (kips)	4	S.	9	7	∞	6	10	11	12	13
23	0.41	0.15	0.30	1.26	0.27	0.15	0.52	0.26	0.27	0.88
24	0.28	0.10	0.19	0.74	0.16	80.0	0.31	0.14	0.15	0.59
25	0.15	0.05	0.00	0.40	0.09	0.04	0.16	0.07	0.12	0.33
76	0.11	0.04	0.05	0.27	0.07	0.03	0.13	0.05	0.11	0.31
27	90'0	0.02	0.04	0.17	0.04	0.03	0.08	0.03	0.03	0.18
28	0.04	0.02	0.02	0.12	0.04	0.01	90.0	0.02	0.02	0.17
29	0.03	0.01	0.01	90.0	0.02	0.01	0.03	0.01	0.02	0.10
30	0.03	0.01	0.01	0.05	0.02	0.01	0.03	0.01	0.01	0.09
31	0.02	0.01	0.01	0.03	0.01	0.00	0.02	0.01	0.01	90.0
32	0.02	00.0	0.01	0.02	0.01	0.00	0.02	0.01	0.02	90.0
33	0.01	0.00	0.00	0.01	0.01	0.00	0.01	0.01	0.01	0.04
34	0.14	0.00	0.00	0.01	0.01	0.00	0.01	0.00	0.00	0.04
35	0.04	00.0	0.00	0.01	0.00	0.00	0.01	0.00	0.00	0.03
36	0.01	00.0	0.00	0.01	0.00	0.00	0.01	0.00	0.00	0.02
37	00.0	0.00	0.00	00.0	0.00	0.00	0.01	0.00	0.00	0.02
38	0.01	0.00	0.00	0.01	0.00	0.00	0.00	00.00	0.00	0.02
39	0.02	0.00	0.00	0.00	0.00	0.00	0.00	00.00	0.00	0.02
40	00.0	00.0	0.00	00.0	0.00	0.00	0.00	0.00	0.00	0.03
41	00.0	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10

Table H-12. Cluster 1 Single Axle Load Spectra

					Vehicle Class	Class				
Load (kips)	4	5	9	7	<b>∞</b>	6	10	11	12	13
3	0.11	2.07	0.14	2.27	1.12	0.90	0.34	0.21	0.32	4.02
4	0.12	14.11	0.51	1.80	1.74	2.32	0.40	09.0	0.82	2.66
5	0.25	15.79	0.81	1.65	2.77	2.03	0.41	1.78	2.10	2.40
9	1.07	14.16	1.22	2.34	4.02	1.92	0.72	5.33	5.89	2.39
7	2.69	9.18	1.61	2.02	5.29	1.48	0.85	4.23	5.59	2.07
<b>∞</b>	7.94	10.62	4.56	3.27	10.20	3.11	2.00	6.05	8.18	2.29
6	10.50	7.02	7.71	3.56	12.69	6.75	3.52	7.29	10.27	2.41
10	15.45	6.91	16.03	5.47	16.58	18.57	9.54	14.32	15.54	6.18
11	12.84	4.61	18.81	5.94	08.6	23.27	14.18	10.92	11.17	9.75
12	12.80	4.24	18.33	8.83	8.10	21.30	18.56	9.32	10.05	13.32
13	66.6	3.05	10.43	9.38	6.17	8.13	13.23	8.20	8.24	10.61
14	6.56	1.88	5.51	7.88	4.20	2.42	7.17	6.24	5.53	6.72
15	6.12	1.81	4.86	96.6	4.57	1.67	7.18	7.37	5.06	7.13
16	3.68	1.11	2.62	7.21	3.07	1.17	4.92	5.07	3.11	5.20
17	3.03	1.06	2.32	7.62	3.16	1.48	5.15	4.70	2.89	5.81
18	1.78	0.65	1.32	5.54	1.99	1.08	3.44	2.84	1.72	4.10
19	1.57	09.0	1.18	5.40	1.76	1.01	3.28	2.46	1.45	4.04
20	96.0	0.36	0.74	3.41	0.94	0.53	1.79	1.27	0.78	2.40
21	08.0	0.30	0.62	2.54	0.72	0.38	1.40	0.94	0.53	2.04
22	0.43	0.16	0.29	1.37	0.37	0.18	0.68	0.40	0.25	1.14
23	0.33	0.12	0.20	1.01	0.27	0.13	0.48	0.25	0.17	0.92
24	0.18	0.07	0.10	0.59	0.17	0.08	0.29	0.11	0.10	0.62

Table H-14. (cont'd)

					Vehicle Class	Class				
Load (kips)	4	S	9	7	8	6	10	11	12	13
25	0.24	0.06	0.27	0.41	0.06	0.02	0.12	0.03	0.19	0.27
26	0.15	0.04	0.10	0.35	0.02	0.02	0.10	0.00	0.00	0.28
27	50.0	0.03	0.10	0.23	0.03	0.01	0.07	0.00	0.00	0.11
28	0.04	0.01	0.02	0.24	0.02	0.01	0.03	0.00	0.00	0.10
29	0.02	0.00	0.00	0.18	0.01	0.00	0.01	0.00	0.00	0.08
30	0.01	0.00	0.01	0.11	0.01	0.00	0.02	0.00	0.00	90.0
31	0.00	0.00	0.01	0.10	0.01	0.00	0.01	0.00	0.00	0.04
32	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00	90.0	0.05
33	00.0	0.00	0.00	0.00	0.01	0.00	0.01	0.01	0.00	0.03
34	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04
35	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02
36	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02
37	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
38	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
39	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
40	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04

Table H-13. Cluster 2 Single Axle Load Spectra

					Vehicle Class	Class				
Load (kips)	4	S	9	7	8	6	10	11	12	13
3	0:30	3.37	0.55	2.36	1.71	2.06	0.61	0.62	1.20	3.80
4	0.35	15.80	1.15	1.69	2.48	3.03	0.65	1.20	2.03	3.17
S	69.0	15.53	1.37	1.61	3.43	2.32	0.65	2.57	2.96	2.68
9	2.19	15.14	2.16	2.12	5.47	2.67	1.05	6.16	5.21	2.98
7	3.63	8.79	2.65	1.75	6.52	2.75	1.39	5.13	5.88	2.38
<b>∞</b>	7.43	8.74	5.72	2.30	10.87	5.91	3.26	8.08	8.94	2.94
6	7.65	5.53	7.39	2.32	10.63	8.20	5.18	8.74	99.8	2.93
10	10.54	5.49	12.77	3.59	12.06	15.77	10.69	11.59	10.29	6.01
11	11.55	4.67	15.00	4.76	9.56	19.70	13.88	9.32	68.6	9.11
12	14.16	4.45	15.60	7.48	8.56	17.22	16.23	9.90	10.89	12.36
13	11.61	3.32	11.26	8.41	6.64	8.10	12.05	8.23	9.31	11.14
14	7.52	2.08	6.71	8.27	4.42	3.20	7.24	5.89	5.54	7.70
15	86.9	1.94	5.86	10.64	4.73	2.24	6.99	6.33	5.47	7.84
16	4.12	1.20	3.36	8.52	3.16	1.36	4.40	4.23	3.40	5.13
17	3.58	1.13	2.77	9.16	3.13	1.57	4.48	4.02	3.15	5.30
18	2.14	0.68	1.66	6.59	1.95	1.10	2.92	2.42	2.09	3.47
19	1.76	0.65	1.43	6.29	1.70	1.07	2.84	2.11	1.58	3.34
20	1.09	0.40	98.0	4.05	96'0	0.61	1.67	1.20	1.07	2.04
21	0.84	0.36	0.74	2.88	0.77	0.47	1.41	06.0	0.76	1.73
22	0.52	0.20	0.37	1.60	0.40	0.23	0.73	0.46	89.0	96.0
23	0.41	0.17	0.22	1.47	0.31	0.17	0.57	0.33	0.37	0.85
24	0:30	0.12	0.15	0.88	0.18	0.10	0.36	0.19	0.19	0.57

Table H-15. M-E PDG Default Single Axle Load Spectra

					Vehicle Class	Class				
Load (kips)	4	5	9	7	<b>∞</b>	6	10	11	12	13
3 1.	1.80	10.05	2.47	2.14	11.65	1.74	3.64	3.55	89.9	8.88
4 0.	96.0	13.21	1.78	0.55	5.37	1.37	1.24	2.91	2.29	2.67
5 2.	2.91	16.42	3.45	2.42	7.84	2.84	2.36	5.19	4.87	3.81
6 3.	3.99	10.61	3.95	2.70	66.9	3.53	3.38	5.27	5.86	5.23
7 6.	08.9	9.22	6.70	3.21	7.99	4.93	5.18	6.32	5.97	6.03
8 11	11.47	8.27	8.45	5.81	9.63	8.43	8.35	86.9	8.86	8.10
9 11	11.30	7.12	11.85	5.26	9.93	13.67	13.85	8.08	9.58	8.35
<b>10</b> 10	10.97	5.85	13.57	7.39	8.51	17.68	17.35	89.6	9.94	10.69
11 9.	88.6	4.53	12.13	6.85	6.47	16.71	16.21	8.55	8.59	10.69
12 8.	8.54	3.46	9.48	7.42	5.19	11.57	10.27	7.29	7.11	11.11
13 7	7.33	2.56	6.83	66.8	3.99	60'9	6.52	7.16	5.87	7.32
14 5.	5.55	1.92	5.05	8.15	3.38	3.52	3.94	5.65	6.61	3.78
15 4.	4.23	1.54	3.74	7.77	2.73	1.91	2.33	4.77	4.55	3.10
16 3.	3.11	1.19	2.66	6.84	2.19	1.55	1.57	4.35	3.63	2.58
17 2.	2.54	0.90	1.92	5.67	1.83	1.10	1.07	3.56	2.56	1.52
18 1.9	1.98	89.0	1.43	4.63	1.53	0.88	0.71	3.02	2.00	1.32
19 1.	1.53	0.52	1.07	3.50	1.16	0.73	0.53	2.06	1.54	1.00
20 1.	1.19	0.40	0.82	2.64	0.97	0.53	0.32	1.63	0.98	0.83
21 1.	1.16	0.31	0.64	1.90	0.61	0.38	0.29	1.27	0.71	0.64
22 0.0	99.0	0.31	0.49	1.31	0.55	0.25	0.19	0.76	0.51	0.38
23 0.	0.56	0.18	0.38	0.97	0.36	0.17	0.15	0.59	0.29	0.52
24 0.	0.37	0.14	0.26	0.67	0.26	0.13	0.17	0.41	0.27	0.22

Table H-15. (cont'd)

					Vehicle Class	Class				
Load (kips)	4	5	9	7	∞	6	10	11	12	13
25	0.31	0.15	0.24	0.43	0.19	0.08	0.09	0.25	0.19	0.13
26	0.18	0.12	0.13	1.18	0.16	90.0	0.05	0.14	0.15	0.26
27	0.18	0.08	0.13	0.26	0.11	0.04	0.03	0.21	0.12	0.28
28	0.14	0.05	0.08	0.17	0.08	0.03	0.02	0.07	0.08	0.12
29	0.08	0.05	0.08	0.17	0.05	0.03	0.03	0.00	0.00	0.13
30	0.05	0.05	0.05	0.08	0.04	0.01	0.02	0.06	0.02	0.05
31	0.04	0.05	0.03	0.72	0.04	0.01	0.03	0.03	0.03	0.05
32	0.04	0.02	0.03	90.0	0.12	0.01	0.01	0.04	0.01	0.08
33	0.04	0.02	0.03	0.03	0.01	0.01	0.05	0.01	0.01	90.0
34	0.03	0.05	0.02	0.03	0.02	0.01	0.01	0.00	0.01	0.02
35	0.02	0.02	0.01	0.02	0.02	0.00	0.01	0.00	0.00	0.01
36	0.02	0.02	0.01	0.05	0.01	0.01	0.00	0.00	0.00	0.01
37	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.00	0.01	0.01
38	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.02	0.01	0.01
39	0.01	0.00	0.01	0.01	0.01	0.00	0.01	0.01	0.00	0.01
40	0.01	0.00	0.01	0.01	0.00	0.00	0.04	0.02	0.00	0.00
41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

# Tandem Axle Load Spectra Design Values

Table H-16. Statewide Tandem Axle Load Spectra

					Vehicle Class	lass				
Load (kips)	4	5	9	7	8	6	10	11	12	13
9	0.08	30.65	4.14	2.48	3.22	1.16	0.25	0.00	0.70	1.54
8	0.40	39.99	13.85	6.14	16:5	2.84	96.0	0.00	1.81	3.51
10	1.13	23.94	10.93	99.9	14.40	69.9	2.90	0.00	4.45	4.99
12	2.17	4.76	6.84	6.79	17.89	9.16	5.88	0.00	6.99	5.69
14	2.60	0.48	6.42	6.82	14.04	8.89	8.08	0.00	10.39	00.9
16	2.91	90.0	6.01	6.67	10.92	7.96	7.86	0.00	12.28	4.44
18	3.48	0.03	5.50	5.95	8.65	7.17	7.06	0.00	13.68	3.15
20	4.26	0.02	5.58	5.53	90.7	6.62	6.59	0.00	13.50	2.90
22	6.01	0.02	5.90	7.67	89.5	6:36	5.96	0.00	11.86	3.54
24	9.23	0.01	6.80	8.36	4.46	6.61	6.01	0.00	10.37	5.09
26	11.21	0.01	5.81	99.9	2.74	5.53	5.47	0.00	6.01	6.05
28	12.99	0.01	5.08	6.15	1.81	5.46	6.11	0.00	3.47	8.03
30	13.64	0.01	4.28	6.29	1.18	5.82	6.85	0.00	1.79	89.6
32	11.61	0.00	3.57	4.82	08'0	6.12	7.44	0.00	1.06	10.11
34	7.94	0.00	2.87	3.54	0.52	5.36	7.07	0.00	0.72	8.54
36	4.76	0.01	2.09	2.66	0.31	3.57	5.62	0.00	0.35	6.36
38	2.56	0.00	1.42	1.89	0.16	2.05	3.83	0.00	0.17	4.20
40	1.42	0.00	0.96	1.36	0.10	1.13	2.40	0.00	0.07	2.51
42	0.74	0.00	0.65	1.26	0.05	0.63	1.44	0.00	0.07	1.50
44	0.41	0.00	0.45	0.61	0.03	0.36	0.84	0.00	0.09	0.88

Table H-16. (cont'd)

				Tarant	Vehicle Class	lace				
Load (kips)	4	3	9	7	<b>∞</b>	6	10	11	12	13
46	0.21	0.00	0.32	0.39	0.05	0.22	0.53	00.00	0.04	0.55
48	0.09	0.00	0.19	0.20	0.05	0.11	0.30	0.00	0.03	0.26
50	0.05	0.00	0.12	0.20	0.01	90.0	0.20	0.00	0.02	0.17
52	0.03	0.00	0.07	0.10	0.01	0.04	0.11	0.00	0.04	0.10
54	0.02	0.00	0.05	0.03	0.01	0.02	0.08	0.00	0.02	90.0
99	0.01	0.00	0.03	0.02	0.00	0.01	0.05	0.00	0.01	0.04
58	0.01	0.00	0.02	0.10	0.00	0.01	0.04	0.00	0.00	0.03
09	0.01	0.00	0.01	0.19	0.00	0.01	0.02	0.00	0.01	0.02
62	0.01	0.00	0.01	0.10	0.00	0.00	0.02	0.00	0.00	0.02
64	0.01	0.00	0.01	0.11	0.00	0.00	0.01	0.00	0.00	0.01
99	0.00	0.00	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.01
89	0.00	0.00	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.01
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
72	0.00	0.00	00.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
74	0.00	0.00	00.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00
92	0.00	0.00	0.00	0.08	0.00	0.00	0.00	0.00	0.00	0.00
28	0.00	0.00	00.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00
08	0.00	0.00	0.00	60.0	0.00	0.00	0.00	0.00	0.00	0.00
82	0.00	0.00	00.00	0.02	0.00	00.00	0.00	0.00	0.00	0.00
	A									

Table H-17. Cluster 1 Tandem Axle Load Spectra

tips)         4         5         6         7         8         9         10         11           0.01         19.37         1.37         3.41         1.75         0.21         0.05         0.00           0.08         45.73         1.437         6.69         3.77         1.09         0.20         0.00           2.25         29.95         9.53         4.24         14.75         5.27         1.49         0.00           2.25         4.67         5.87         1.42         21.34         10.01         4.85         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.65         0.00         6.13         7.38         12.02         11.01         7.31         0.00           4.46         0.00         5.27						Vehicle Class	Class				
0.01         1937         1.37         3.41         1.75         0.21         0.05         0.00           0.08         45.73         14.37         6.69         3.77         1.09         0.20         0.00           0.55         29.95         9.53         4.24         14.75         5.27         1.49         0.00           2.25         4.67         5.87         1.42         21.34         10.01         4.85         0.00           3.65         0.27         7.51         5.41         15.36         11.01         4.85         0.00           3.65         0.00         6.13         5.79         9.35         11.01         7.31         0.00           4.46         0.00         6.13         5.79         9.35         10.15         9.24         0.00           4.46         0.00         5.66         3.30         7.62         9.04         12.54         0.00           6.26         0.00         5.27         11.13         5.64         7.28         8.49         0.00           9.81         0.00         6.81         7.90         2.10         4.79         4.35         0.00           14.77         0.00         6.20	Load (kips)	4	2	9	7	8	6	10	11	12	13
0.08         45.73         14.37         6.69         3.77         1.09         0.20         0.00           0.55         29.95         9.53         4.24         14.75         5.27         1.49         0.00           2.25         4.67         5.87         1.42         21.34         10.01         4.85         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.65         0.27         7.51         5.41         15.36         11.01         4.85         0.00           3.65         0.20         0.01         7.38         12.02         11.01         7.31         0.00           3.36         0.00         6.13         5.79         9.35         10.15         9.24         0.00           4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         5.11         1.30         4.46         4.79         4.73         0.00           19.52         0.00         4.82	9	0.01	19.37	1.37	3.41	1.75	0.21	0.05	0.00	0.14	99.0
0.55         29.95         9.53         4.24         14.75         5.27         1.49         0.00           2.25         4.67         5.87         1.42         21.34         10.01         4.85         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.63         0.01         7.49         7.38         12.02         11.01         7.31         0.00           3.36         0.00         6.13         5.79         9.35         10.15         9.24         0.00           3.93         0.00         5.66         3.30         7.62         9.04         12.54         0.00           4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           9.81         0.00         6.81         7.90         2.10         4.79         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         4.82	8	0.08	45.73	14.37	69'9	3.77	1.09	0.20	0.00	0.16	1.55
2.25         4.67         5.87         1.42         21.34         10.01         4.85         0.00           3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.63         0.01         7.49         7.38         12.02         11.01         7.31         0.00           3.36         0.00         6.13         5.79         9.35         10.15         9.24         0.00           4.46         0.00         5.66         3.30         7.62         9.04         12.54         0.00           6.26         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         8.49         0.00           9.81         0.00         6.81         7.90         2.10         4.79         4.35         0.00           19.52         0.00         6.81         7.90         2.10         4.79         4.35         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78	10	0.55	29.95	6.53	4.24	14.75	5.27	1.49	0.00	3.32	2.85
3.65         0.27         7.51         5.41         15.36         11.30         7.31         0.00           3.63         0.01         7.49         7.38         12.02         11.01         7.31         0.00           3.36         0.00         6.13         5.79         9.35         10.15         9.24         0.00           3.93         0.00         5.66         3.30         7.62         9.04         12.54         0.00           4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           9.81         0.00         6.21         7.99         2.10         4.79         4.35         0.00           9.81         0.00         6.20         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           16.58         0.00         3.00	12	2.25	4.67	2.87	1.42	21.34	10.01	4.85	0.00	5.87	4.14
3.63         0.01         7.49         7.38         12.02         11.01         7.31         0.00           3.36         0.00         6.13         5.79         9.35         10.15         9.24         0.00           3.93         0.00         5.66         3.30         7.62         9.04         12.54         0.00           4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           9.81         0.00         6.81         7.90         2.10         4.79         6.00         0.00           14.77         0.00         6.81         7.90         2.10         4.79         6.00         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           2.46         0.00         1.86         <	14	3.65	0.27	7.51	5.41	15.36	11.30	7.31	0.00	8.47	4.88
3.36         0.00         6.13         5.79         9.35         10.15         9.24         0.00           3.93         0.00         5.66         3.30         7.62         9.04         12.54         0.00           4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           9.81         0.00         6.81         7.90         2.10         4.79         4.35         0.00           14.77         0.00         6.81         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           16.58         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.16         0.00         0.80 <t< th=""><th>16</th><th>3.63</th><th>0.01</th><th>7.49</th><th>7.38</th><th>12.02</th><th>11.01</th><th>7.31</th><th>0.00</th><th>15.34</th><th>4.08</th></t<>	16	3.63	0.01	7.49	7.38	12.02	11.01	7.31	0.00	15.34	4.08
3.93         0.00         5.66         3.30         7.62         9.04         12.54         0.00           4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           14.77         0.00         6.81         7.90         2.10         4.79         4.35         0.00           19.52         0.00         6.20         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           2.46         0.00         3.00         4.17         0.21         4.30         0.00         0.00           0.74         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.16         0.00         0.80 <td< th=""><th>18</th><th>3.36</th><th>00.0</th><th></th><th>5.79</th><th>9.35</th><th>10.15</th><th>9.24</th><th>0.00</th><th>18.04</th><th>2.62</th></td<>	18	3.36	00.0		5.79	9.35	10.15	9.24	0.00	18.04	2.62
4.46         0.00         5.27         11.13         5.64         7.28         8.49         0.00           6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           9.81         0.00         6.81         7.90         2.10         4.79         4.35         0.00           14.77         0.00         6.81         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         4.82         6.13         0.60         5.07         5.59         0.00           7.32         0.00         3.78         4.62         0.33         5.23         6.58         0.00           7.32         0.00         3.78         4.62         0.33         5.23         6.58         0.00           2.46         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.26         0.00         0.80         0.52         0.03         0.12         0.00         0.00           0.15         0.00         0.33         0.	20	3.93	0.00	99.5	3.30	7.62	9.04	12.54	0.00	16.32	2.03
6.26         0.00         7.00         11.47         3.75         6.37         5.16         0.00           9.81         0.00         6.81         7.90         2.10         4.79         4.35         0.00           14.77         0.00         6.20         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           2.46         0.00         3.00         4.17         0.21         4.30         7.16         0.00           0.74         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.26         0.00         0.80         0.52         0.03         0.11         4.30         0.00           0.15         0.00         0.80         0.52         0.03         0.12         0.90         0.00           0.06         0.00         0.33         0.	22	4.46	00.0	5.27	11.13	5.64	7.28	8.49	0.00	12.08	2.38
9.81         0.00         6.81         7.90         2.10         4.79         4.35         0.00           14.77         0.00         6.20         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           7.32         0.00         3.00         4.17         0.21         4.30         7.16         0.00           2.46         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.74         0.00         1.05         2.94         0.08         1.11         4.30         0.00           0.26         0.00         0.80         0.52         0.03         0.15         0.00         0.00           0.16         0.00         0.51         0.55         0.03         0.12         0.90         0.00           0.12         0.00         0.33         0.43         0.01         0.02         0.24         0.00           0.06         0.00         0.28         0.97	24	6.26	00.0	7.00	11.47	3.75	6.37	5.16	0.00	7.54	3.94
14.77         0.00         6.20         7.19         1.09         4.66         4.79         0.00           19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           7.32         0.00         3.00         4.17         0.21         4.30         7.16         0.00           2.46         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.74         0.00         1.05         2.94         0.08         1.11         4.30         0.00           0.26         0.00         0.80         0.52         0.03         0.12         0.90         0.00           0.16         0.00         0.51         0.55         0.03         0.12         0.90         0.00           0.12         0.00         0.33         0.43         0.01         0.02         0.24         0.00           0.06         0.00         0.28         0.97         0.01         0.02         0.24         0.00	26	9.81	00.0	6.81	7.90	2.10	4.79	4.35	0.00	5.28	5.56
19.52         0.00         4.82         6.13         0.60         5.07         5.59         0.00           16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           7.32         0.00         3.00         4.17         0.21         4.30         7.16         0.00           0.74         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.74         0.00         1.05         2.94         0.08         1.11         4.30         0.00           0.26         0.00         0.80         0.52         0.03         0.15         0.90         0.00           0.16         0.00         0.51         0.55         0.03         0.12         0.90         0.00           0.12         0.00         0.33         0.43         0.01         0.02         0.24         0.00           0.06         0.00         0.28         0.97         0.01         0.02         0.24         0.00	28	14.77	00.0	6.20	7.19	1.09	4.66	4.79	0.00	4.69	8.34
16.58         0.00         3.78         4.62         0.33         5.23         6.58         0.00           7.32         0.00         3.00         4.17         0.21         4.30         7.16         0.00           2.46         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.74         0.00         1.05         2.94         0.08         1.11         4.30         0.00           0.26         0.00         0.80         0.52         0.03         0.35         2.19         0.00           0.16         0.00         0.51         0.55         0.03         0.12         0.90         0.00           0.12         0.00         0.33         0.43         0.01         0.04         0.50         0.00           0.06         0.06         0.28         0.97         0.01         0.02         0.24         0.00	30	19.52	00.0	4.82	6.13	09.0	5.07	5.59	0.00	0.95	11.14
7.32         0.00         3.00         4.17         0.21         4.30         7.16         0.00           2.46         0.00         1.86         3.73         0.15         2.57         6.43         0.00           0.74         0.00         1.05         2.94         0.08         1.11         4.30         0.00           0.26         0.00         0.80         0.52         0.03         0.35         2.19         0.00           0.16         0.00         0.51         0.55         0.03         0.12         0.90         0.00           0.12         0.00         0.33         0.43         0.01         0.04         0.50         0.00           0.06         0.00         0.28         0.97         0.01         0.24         0.00	32	16.58	00.0	3.78	4.62	0.33	5.23	6.58	0.00	1.01	12.42
2.46       0.00       1.86       3.73       0.15       2.57       6.43         0.74       0.00       1.05       2.94       0.08       1.11       4.30         0.26       0.00       0.80       0.52       0.03       0.35       2.19         0.16       0.00       0.51       0.55       0.03       0.12       0.90         0.12       0.00       0.33       0.43       0.01       0.04       0.50         0.06       0.00       0.28       0.01       0.02       0.24	34	7.32	0.00	3.00	4.17	0.21	4.30	7.16	0.00	0.45	11.47
0.74       0.00       1.05       2.94       0.08       1.11       4.30         0.26       0.00       0.80       0.52       0.03       0.35       2.19         0.16       0.00       0.51       0.55       0.03       0.12       0.90         0.12       0.00       0.33       0.43       0.01       0.04       0.50         0.06       0.00       0.28       0.97       0.01       0.02       0.24	36	2.46	0.00	1.86	3.73	0.15	2.57	6.43	0.00	0.09	8.94
0.26         0.00         0.80         0.52         0.03         0.35         2.19           0.16         0.00         0.51         0.55         0.03         0.12         0.90           0.12         0.00         0.33         0.43         0.01         0.04         0.50           0.06         0.00         0.28         0.97         0.01         0.02         0.24	38	0.74	00.0	1.05	2.94	0.08	1.11	4.30	0.00	0.06	5.90
0.16         0.00         0.51         0.55         0.03         0.12         0.90           0.12         0.00         0.33         0.43         0.01         0.04         0.50           0.06         0.00         0.28         0.97         0.01         0.02         0.24	40	0.26	00.0	08.0	0.52	0.03	0.35	2.19	0.00	0.02	3.53
0.12         0.00         0.33         0.43         0.01         0.04         0.50           0.06         0.00         0.28         0.97         0.01         0.02         0.24	42	0.16	0.00	0.51	0.55	0.03	0.12	0.90	0.00	90.0	1.90
0.06 0.00 0.28 0.97 0.01 0.02 0.24	44	0.12	00.0	0.33	0.43	0.01	0.04	0.50	0.00	0.01	0.79
	46	0.06	0.00	0.28	0.97	0.01	0.02	0.24	0.00	0.02	0.43
0.01 0.00 0.15 0.00 0.01 0.01 0.11	48	0.01	00.0	0.15	0.00	0.01	0.01	0.11	0.00	0.07	0.16

0.08 0.06 0.04 0.03 0.03 0.00 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.01 0.01 0.01 0.01 13 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01 0.00 0.09 0.05 0.03 0.02 0.02 0.00 0.00 0.00 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 Vehicle Class Table H-17. (cont'd) 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.04 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.47 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01 0.01 0.00 0.01 4 Load (kips) 98 54 58 3 62 **4** 2 74 78 20 52 72 82 8

312

Table H-18. Cluster 2 Tandem Axle Load Spectra

					Vehicle Class	Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
9	0.02	17.18	5.00	2.51	1.29	0.73	0.13	0.00	0.55	1.47
<b>&amp;</b>	0.07	41.93	18.48	8.59	5.61	3.96	1.45	0.00	1.64	4.10
10	0.65	33.52	99.6	7.99	19.22	11.04	5.24	0.00	9.03	6.80
12	1.76	98.9	6.11	6.18	23.13	13.16	10.63	0.00	10.92	8.38
14	2.62	0.47	6.93	6.97	15.95	10.76	12.04	0.00	14.38	7.76
16	2.75	0.02	6.22	5.84	11.23	8.61	6.07	0.00	14.07	4.83
18	3.61	00.0	5.59	90.9	8.25	7.44	6:36	0.00	15.15	3.19
20	4.76	00.0	5.70	7.33	5.71	6.46	4.84	0.00	15.33	2.98
22	6.88	00.0	5.94	6.18	3.86	5.40	4.21	0.00	9.85	3.45
24	12.36	0.00	8.78	8.36	2.33	5.29	4.91	0.00	6.01	5.48
26	14.65	0.00	5.57	6.02	1.19	4.35	5.25	0.00	1.58	6.71
28	15.70	0.00	4.60	6.05	92.0	4.35	6.27	0.00	0.55	8.32
30	14.60	0.02	3.64	66.9	0.51	4.97	6.34	0.00	0.74	9.47
32	10.37	0.00	2.77	3.32	0.33	5.50	6.48	0.00	0.02	9.02
34	5.48	0.00	2.07	3.19	0.24	4.25	5.99	0.00	0.00	7.31
36	2.45	0.00	1.48	2.37	0.19	2.11	4.42	0.00	0.02	5.03
38	0.70	0.00	1.11	1.96	80.0	0.87	2.74	0.00	0.04	2.98
40	0.27	0.00	0.78	1.20	90.0	0.40	1.61	0.00	0.03	1.39
42	0.12	0.00	0.52	1.02	0.03	0.19	0.86	0.00	0.04	0.61
44	0.07	0.00	0.36	0.95	0.01	0.00	0.43	0.00	0.04	0.28
46	0.04	0.00	0.24	0.59	0.01	0.04	0.28	0.00	0.01	0.16
48	0.03	0.00	0.14	90.0	0.01	0.02	0.14	0.00	0.00	0.00

0.03 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.05 0.04 0.03 0.01 0.01 0.01 0.01 13 0.00 0.06 0.02 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.12 0.02 0.01 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 Vehicle Class Table H-18. (cont'd) 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01  $\infty$ 0.16 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 **~** 90.0 0.05 0.00 0.00 0.00 0.00 0.00 0.00 0.03 0.02 0.00 0.00 0.11 0.01 0.01 0.01 0.01 9 0.00 0.01 0.01 0.01 0.01 9/ 99 78 20 52 26 28 8 62 2 89 20 72 74 54 8 82

314

Table H-19. Cluster 3 Tandem Axle Load Spectra

					Vehicle Class	lass				
Load (kips)	4	5	9	7	8	6	10	11	12	13
9	0.17	34.94	5.80	3.02	5.28	2.46	0.48	0.00	0.55	1.94
8	0.89	37.27	10.52	5.18	7.44	4.24	1.23	0.00	1.60	4.03
10	2.12	21.60	9.50	6.45	14.12	7.90	2.80	0.00	4.79	5.48
12	3.17	4.93	6.49	8.74	16.63	9.81	4.75	0.00	8.80	90.9
14	2.70	0.72	5.56	6.46	12.99	9.28	6.81	0.00	10.29	6.44
16	2.96	0.17	5.48	6.87	10.04	7.86	7.23	0.00	9.77	4.50
18	3.74	0.08	5.34	6.01	8.25	82.9	6.42	0.00	11.70	2.89
20	3.97	0.07	5.60	6.64	7.04	6.14	99.5	0.00	11.30	2.48
22	5:35	0.05	6.25	9.31	5.71	6.23	5.45	0.00	12.01	3.11
24	9.03	0.03	7.10	9.13	4.42	6.55	5.79	0.00	11.45	4.51
26	11.09	0.03	6.01	6.20	2.74	5.49	5.05	0.00	7.10	5.47
28	12.43	0.02	5.41	4.86	1.87	5.34	5.78	0.00	3.93	7.11
30	12.16	0.03	4.63	5.07	1.25	5.21	6.81	0.00	2.09	86.8
32	11.43	0.00	4.00	3.87	0.82	4.99	7.76	0.00	1.29	9.94
34	8.72	0.01	3.47	2.53	0.54	4.32	7.92	0.00	1.51	8.48
36	5.11	0.03	2.77	2.70	0.32	3.11	82.9	0.00	96.0	6.52
38	2.37	0.01	1.89	1.87	0.18	1.83	4.93	0.00	0.32	4.42
40	1.21	0.01	1.32	1.63	0.11	1.02	3.23	0.00	0.13	2.74
42	0.58	0.00	06.0	1.45	0.08	0.55	2.01	0.00	0.10	1.81
44	0.31	0.00	99.0	0.80	0.05	0.32	1.16	0.00	0.12	1.21
46	0.19	0.00	0.49	0.29	0.03	0.20	0.77	0.00	0.09	0.76
48	0.13	0.00	0:30	0.32	0.03	0.11	0.41	0.00	0.03	0.39

Table H-19. (cont'd)

				I ane	1 able 11-19. (colit u)	(n)				
					Vehicle Class	Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
50	0.07	0.00	0.17	0.35	0.05	0.07	0.24	0.00	0.00	0.27
52	0.03	0.00	0.11	0.15	0.01	0.05	0.15	0.00	0.05	0.15
54	0.03	0.00	0.07	0.04	0.01	0.04	0.12	0.00	0.01	0.09
99	0.01	0.00	0.03	0.00	0.01	0.03	0.07	0.00	0.01	90.0
58	0.01	0.00	0.03	0.00	0.01	0.02	0.05	0.00	0.00	0.04
09	00.0	0.00	0.02	90.0	0.00	0.01	0.03	0.00	0.00	0.02
62	0.01	0.00	0.02	0.00	0.00	0.01	0.03	0.00	0.00	0.03
64	0.01	0.00	0.02	0.00	0.00	0.01	0.02	0.00	0.00	0.02
99	0.00	0.00	0.02	0.00	0.00	0.01	0.03	0.00	0.00	0.02
89	0.00	0.00	0.01	0.00	0.00	0.01	0.01	0.00	0.00	0.01
70	0.00	0.00	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.01
72	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00
74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
92	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01
78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
82	0.00	0.00	00.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Table H-20. Cluster 4 Tandem Axle Load Spectra

tips)         4         5         6         7         8         9         10         11         12           0.10         47.17         4.24         2.46         4.23         0.81         0.23         0.00         0.20           0.42         34.29         11.13         5.55         6.17         1.58         0.83         0.00         0.64           1.54         3.13         9.41         5.56         12.03         5.12         4.27         0.00         2.07           1.54         3.13         9.41         5.56         12.03         5.12         4.27         0.00         2.07           2.20         0.33         7.04         6.70         11.30         6.29         6.23         0.00         4.26           3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         7.37           3.24         0.00         5.39         5.40         8.09         6.62         6.83         0.00         1.06           4.83         0.00         5.33         4.60         8.08         6.81         6.83         0.00         1.06           6.63         0.00         5.32 <t< th=""><th></th><th></th><th></th><th></th><th></th><th>Vehicle Class</th><th>Class</th><th></th><th></th><th></th><th></th></t<>						Vehicle Class	Class				
0.10         47.17         4.24         2.46         4.23         0.81         0.23         0.00         0.20           0.42         34.29         11.13         5.55         6.17         1.58         0.83         0.00         0.64           0.97         15.06         13.09         6.94         9.86         3.24         2.25         0.00         2.07           1.54         3.13         9.41         5.56         12.03         5.12         4.27         0.00         4.26           2.20         0.33         7.04         6.70         11.30         6.29         6.23         0.00         4.26           3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         1.37           3.75         0.00         5.39         5.40         8.69         6.62         6.83         0.00         1.06           4.83         0.00         5.33         4.60         8.08         6.81         6.88         0.00         1.04           6.63         0.00         5.31         7.25         7.62         7.62         0.00         1.04           7.94         0.00         5.31         7.81	Load (kips)	4	3	9	7	œ	6	10	11	12	13
0.42         34.29         11.13         5.55         6.17         1.58         0.83         0.00         0.64           0.97         15.06         13.09         6.94         9.86         3.24         2.25         0.00         2.07           1.54         3.13         9.41         5.56         12.03         5.12         4.27         0.00         4.26           2.20         0.03         7.04         6.70         11.30         6.29         6.23         0.00         7.37           3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         7.37           3.76         0.00         5.39         5.40         8.69         6.62         6.83         0.00         10.46           6.63         0.00         5.33         4.60         8.08         6.81         6.88         0.00         10.46           6.63         0.00         5.72         7.25         7.62         7.68         7.23         0.00         13.32           8.12         0.00         5.31         7.81         5.02         7.13         6.89         6.60         0.00         11.03           8.14         0.00	9	0.10	47.17	4.24	2.46	4.23	0.81	0.23	0.00	0.20	1.61
0.97         15.06         13.09         6.94         9.86         3.24         2.25         0.00         2.07           1.54         3.13         9.41         5.56         12.03         5.12         4.27         0.00         4.26           2.20         0.33         7.04         6.70         11.30         6.29         6.23         0.00         7.37           3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         7.37           3.76         0.00         5.39         5.40         8.69         6.62         6.83         0.00         10.46           4.83         0.00         5.33         4.60         8.08         6.81         6.88         0.00         10.46           6.63         0.00         5.72         7.25         7.62         7.62         0.00         13.32           8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         15.70           9.16         0.00         4.46         7.66         3.53         6.63         0.00         11.03           9.16         0.00         4.56         7.62         7.13	<b>∞</b>	0.42	34.29	11.13	5.55	6.17	1.58	0.83	0.00	0.64	2.52
1.54         3.13         9.41         5.56         12.03         5.12         4.27         0.00         4.26           2.20         0.33         7.04         6.70         11.30         6.29         6.23         0.00         7.37           3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         10.06           4.83         0.00         5.39         5.40         8.69         6.62         6.83         0.00         10.46           6.63         0.00         5.33         4.60         8.08         6.81         6.88         0.00         10.46           6.63         0.00         5.72         7.25         7.62         7.68         7.23         0.00         13.32           8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         13.46           8.12         0.00         4.14         7.72         7.35         8.65         7.29         0.00         11.03           8.37         0.00         4.14         7.72         2.33         6.63         6.00         11.03           9.80         0.00         2.84         3.83	10	0.97	15.06	13.09	6.94	98.6	3.24	2.25	0.00	2.07	3.15
2.20         0.33         7.04         6.70         11.30         6.29         6.23         0.00         7.37           3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         10.06           3.76         0.00         5.39         5.40         8.69         6.62         6.83         0.00         9.50           4.83         0.00         5.33         4.60         8.08         6.81         6.88         0.00         9.50           6.63         0.00         5.32         7.25         7.62         7.62         0.00         10.46           8.12         0.00         6.36         6.72         7.83         8.66         7.62         0.00         11.03           8.12         0.00         4.66         7.25         7.13         6.35         0.00         11.03           8.37         0.00         4.66         7.62         7.13         6.35         0.00         11.03           9.16         0.00         4.66         7.62         7.13         6.35         0.00         11.03           10.42         0.00         4.14         7.72         2.33         6.52         7.29	12	1.54	3.13	9.41	5.56	12.03	5.12	4.27	0.00	4.26	4.01
3.22         0.02         5.86         5.78         10.06         6.71         6.87         0.00         10.06           3.76         0.00         5.39         5.40         8.69         6.62         6.83         0.00         9.50           4.83         0.00         5.33         4.60         8.08         6.81         6.88         0.00         10.46           6.63         0.00         5.72         7.25         7.62         7.68         7.23         0.00         13.32           8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         11.03           8.12         0.00         4.66         7.66         3.53         6.63         6.60         0.00         11.03           8.37         0.00         4.14         7.72         2.33         6.52         7.29         0.00         11.03           9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         1.06           9.80         0.00         3.45         6.04         1.53         6.43         7.54         0.00         2.5           8.11         0.00         2.84 <t< th=""><th>14</th><th>2.20</th><th>0.33</th><th>7.04</th><th>6.70</th><th>11.30</th><th>6.29</th><th>6.23</th><th>0.00</th><th>7.37</th><th>4.50</th></t<>	14	2.20	0.33	7.04	6.70	11.30	6.29	6.23	0.00	7.37	4.50
3.76         0.00         5.39         5.40         8.69         6.62         6.83         0.00         9.50           4.83         0.00         5.33         4.60         8.08         6.81         6.88         0.00         10.46           6.63         0.00         5.72         7.25         7.62         7.68         7.23         0.00         10.46           8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         13.32           7.94         0.00         5.31         7.81         5.02         7.13         6.35         0.00         11.03           8.37         0.00         4.14         7.72         2.33         6.63         6.00         11.03           9.10         0.00         4.14         7.72         2.33         6.52         7.29         0.00         6.88           9.80         0.00         3.45         6.04         1.53         6.43         7.54         0.00         2.25           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         2.25           6.03         0.00         0.20         2.25 <th< th=""><th>16</th><th>3.22</th><th>0.02</th><th>5.86</th><th>5.78</th><th>10.06</th><th>6.71</th><th>6.87</th><th>0.00</th><th>10.06</th><th>4.17</th></th<>	16	3.22	0.02	5.86	5.78	10.06	6.71	6.87	0.00	10.06	4.17
4.83         0.00         5.33         4.60         8.08         6.81         6.88         0.00         10.46           6.63         0.00         5.72         7.25         7.62         7.68         7.23         0.00         13.32           8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         15.70           7.94         0.00         5.31         7.81         5.02         7.13         6.35         0.00         11.03           8.37         0.00         4.66         7.66         3.53         6.63         6.00         11.03           9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         6.88           10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         3.86           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         0.25           6.03         0.00         0.90         2.29 <t< th=""><th>18</th><th>3.76</th><th>0.00</th><th>5.39</th><th>5.40</th><th>8.69</th><th>6.62</th><th>6.83</th><th>0.00</th><th>9.50</th><th>3.95</th></t<>	18	3.76	0.00	5.39	5.40	8.69	6.62	6.83	0.00	9.50	3.95
6.63         0.00         5.72         7.25         7.62         7.63         0.00         13.32           8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         15.70           7.94         0.00         5.31         7.81         5.02         7.13         6.35         0.00         11.03           8.37         0.00         4.66         7.66         3.53         6.63         6.00         11.03           9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         3.86           10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         3.86           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.05         0.55         4.77         5.29         0.00         0.25           6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.12           2.22         0.00         0.50         0.50         0.16 <td< th=""><th>20</th><th>4.83</th><th>0.00</th><th>5.33</th><th>4.60</th><th>8.08</th><th>6.81</th><th>6.88</th><th>0.00</th><th>10.46</th><th>3.79</th></td<>	20	4.83	0.00	5.33	4.60	8.08	6.81	6.88	0.00	10.46	3.79
8.12         0.00         6.36         6.72         7.35         8.66         7.62         0.00         15.70           7.94         0.00         5.31         7.81         5.02         7.13         6.35         0.00         11.03           8.37         0.00         4.66         7.66         3.53         6.63         6.00         0.00         6.88           9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         6.88           10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         3.86           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.17         0.30         3.60         3.84         0.00         0.25           6.03         0.00         1.36         2.17         0.30         2.29         0.00         0.00         0.12           2.22         0.00         0.60         1	22	6.63	0.00	5.72	7.25	7.62	89.7	7.23	0.00	13.32	3.85
7.94         0.00         5.31         7.81         5.02         7.13         6.35         0.00         11.03           8.37         0.00         4.66         7.66         3.53         6.63         6.60         0.00         6.88           9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         3.86           10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         2.25           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         0.32           6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.26           1.25         0.00         0.50         2.29         0.16         2.37         2.58         0.00         0.12           1.25         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.00           0.27         0.00         0.27         0.	24	8.12	0.00	6.36	6.72	7.35	99'8	7.62	0.00	15.70	4.92
8.37         0.00         4.66         7.66         3.53         6.63         6.60         0.00         6.88           9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         3.86           10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         2.25           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         1.06           6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.26           3.84         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           2.22         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           1.25         0.00         0.39         0.27         0.05         0.48         0.69         0.00         0.00           0.00         0.00         0.18         0.3	26	7.94	0.00	5.31	7.81	5.02	7.13	6.35	0.00	11.03	5.77
9.16         0.00         4.14         7.72         2.33         6.52         7.29         0.00         3.86           10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         2.25           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         0.32           6.03         0.00         1.36         2.17         0.30         3.84         0.00         0.26           3.84         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           2.22         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           1.25         0.00         0.39         0.27         0.05         0.48         0.69         0.00         0.00           0.57         0.00         0.03         0.22         0.03         0.04         0.00         0.07           0.20         0.00         0.18         0.36         0.03         0.0	28	8.37	0.00	4.66	99'L	3.53	6.63	09.9	0.00	6.88	7.68
10.42         0.00         3.45         6.04         1.53         6.43         7.54         0.00         2.25           9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         0.32           6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.26           2.22         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           1.25         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           0.57         0.07         0.05         0.82         1.07         0.00         0.08           0.50         0.00         0.18         0.36         0.03         0.03         0.00         0.00         0.00	30	9.16	0.00	4.14	7.72	2.33	6.52	7.29	0.00	3.86	9.40
9.80         0.00         2.84         3.83         0.99         5.85         6.64         0.00         1.06           8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         0.32           6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.26           3.84         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           2.22         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           1.25         0.00         0.39         0.27         0.05         0.48         0.69         0.00         0.08           0.57         0.00         0.18         0.35         0.03         0.03         0.03         0.03         0.03         0.03         0.03         0.00         0.00         0.00	32	10.42	0.00	3.45	6.04	1.53	6.43	7.54	0.00	2.25	10.13
8.11         0.00         2.03         2.65         0.55         4.77         5.29         0.00         0.32           6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.26           2.22         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           1.25         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           0.57         0.00         0.39         0.27         0.05         0.48         0.69         0.00         0.08           0.20         0.00         0.18         0.36         0.03         0.44         0.00         0.07	34	08.6	0.00	2.84	3.83	0.99	5.85	6.64	0.00	1.06	9.17
6.03         0.00         1.36         2.17         0.30         3.60         3.84         0.00         0.26           3.84         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           2.22         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           1.25         0.00         0.39         0.27         0.05         0.82         1.07         0.00         0.08           0.57         0.00         0.22         0.48         0.69         0.00         0.07           0.20         0.00         0.18         0.36         0.03         0.03         0.03         0.03         0.00         0.00	36	8.11	00.0	2.03	2.65	0.55	4.77	5.29	0.00	0.32	7.20
3.84         0.00         0.90         2.29         0.16         2.37         2.58         0.00         0.12           2.22         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           1.25         0.00         0.39         0.27         0.05         0.82         1.07         0.00         0.08           0.57         0.00         0.27         0.02         0.48         0.69         0.00         0.07           0.20         0.00         0.18         0.36         0.03         0.22         0.44         0.00         0.07	38	6.03	0.00	1.36	2.17	0.30	3.60	3.84	0.00	0.26	5.21
2.22         0.00         0.60         1.17         0.08         1.43         1.65         0.00         0.10           1.25         0.00         0.39         0.27         0.05         0.82         1.07         0.00         0.08           0.57         0.00         0.27         0.02         0.48         0.69         0.00         0.07           0.20         0.00         0.18         0.36         0.03         0.22         0.44         0.00         0.07	40	3.84	0.00	06.0	2.29	0.16	2.37	2.58	0.00	0.12	3.53
1.25         0.00         0.39         0.27         0.05         0.82         1.07         0.00         0.08           0.57         0.00         0.27         0.22         0.48         0.69         0.00         0.07           0.20         0.00         0.18         0.36         0.03         0.22         0.44         0.00         0.07	42	2.22	0.00	09.0	1.17	0.08	1.43	1.65	0.00	0.10	2.25
0.57         0.00         0.27         0.22         0.02         0.48         0.69         0.00         0.07           0.20         0.00         0.18         0.36         0.03         0.22         0.44         0.00         0.07	4	1.25	0.00	0.39	0.27	0.05	0.82	1.07	0.00	0.08	1.38
0.20 0.00 0.18 0.36 0.03 0.22 0.44 0.00 0.07	46	0.57	0.00	0.27	0.22	0.02	0.48	69.0	0.00	0.07	0.87
20:0	48	0.20	0.00	0.18	0.36	0.03	0.22	0.44	0.00	0.07	0.37

Table H-20. (cont'd)

				I anne I	I able II-20. (coll u)	(1				
					Vehicle Class	lass				
Load (kips)	4	2	9	7	8	6	10	11	12	13
20	0.10	00.0	0.11	0.26	0.01	0.11	0.29	0.00	90.0	0.23
52	0.06	00.0	0.07	0.06	0.01	90.0	0.17	0.00	0.09	0.09
54	0.03	00'0	0.04	0.07	0.00	0.03	0.11	0.00	0.07	0.07
26	0.02	00.0	0.03	0.06	0.00	0.02	0.07	0.00	0.01	0.04
28	0.03	00.0	0.03	0.07	0.00	0.01	0.05	0.00	0.02	0.03
09	0.02	00.0	0.01	0.16	0.00	0.00	0.03	0.00	0.05	0.02
62	0.01	00.0	0.01	0.17	0.00	0.00	0.03	0.00	0.00	0.01
64	0.01	00.0	0.01	0.00	0.00	0.00	0.01	0.00	0.01	0.01
99	0.00	00.0	0.00	0.00	0.00	0.00	0.01	00.00	0.00	0.01
89	0.01	00.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01
70	0.01	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
72	0.00	00.00	0.00	0.00	0.00	0.00	0.00	00.00	0.01	0.01
74	0.00	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
92	0.00	00'0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
28	0.00	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	00.00	0.00	0.00

Table H-21. Cluster 5 Tandem Axle Load Spectra

					Vehicle Class	Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
9	0.00	25.33	1.19	0.56	1.30	0.45	0.13	0.00	2.50	1.38
<b>∞</b>	90.0	47.38	17.34	4.88	4.35	1.75	0.37	0.00	5.69	4.56
10	0.42	23.20	13.94	6.49	14.26	4.69	1.55	0.00	1.26	99.5
12	1.55	3.71	5.46	88.6	19.00	8.08	4.15	0.00	2.73	4.49
14	2.17	0.37	5.61	8.69	16.66	8.44	7.71	0.00	10.55	5.54
16	1.99	0.01	5.94	8.44	12.84	7.52	9.40	0.00	15.03	4.40
18	2.33	0.00	5.37	29.9	6.53	99.9	8.16	0.00	17.47	2.79
20	3.50	0.00	99.5	3.52	7.18	6.00	6.24	0.00	17.17	2.98
22	6.32	0.00	5.89	5.05	5.46	5.46	5.85	0.00	12.60	5.07
24	8.83	0.00	6.73	6.70	3.89	5.50	6.48	0.00	9.25	6.95
26	12.34	0.00	5.77	5.92	2.04	4.99	6.27	0.00	3.71	7.09
28	16.15	0.00	4.91	5.93	1.14	5.73	6.83	0.00	0.90	9.87
30	17.46	0.00	4.31	2.67	0.70	7.49	8.06	0.00	0.33	11.09
32	12.07	0.00	3.92	7.52	0.74	9.57	8.76	0.00	0.44	10.04
34	7.66	0.00	2.77	5.36	0.43	9.13	7.85	0.00	0.12	7.29
36	4.17	0.00	1.88	2.20	0.22	5.31	4.88	0.00	0.01	4.73
38	1.84	0.00	1.30	0.53	0.11	2.11	2.77	0.00	0.01	2.69
40	0.78	0.00	0.72	0.22	0.10	0.67	1.71	0.00	0.01	1.34
42	0.22	0.00	0.48	1.89	0.01	0.24	1.18	0.00	0.01	0.72
44	90.0	0.00	0.31	0.38	0.02	0.10	0.73	0.00	0.21	0.40
46	0.05	0.00	0.19	0.10	0.01	0.05	0.39	0.00	0.00	0.31
48	0.00	0.00	0.10	0.05	0.00	0.03	0.21	0.00	0.00	0.16

Table H-21. (cont'd)

					Vehicle Class	Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
95	0.01	00.0	0.09	0.00	0.01	0.01	0.14	0.00	0.00	0.11
52	0.01	0.00	0.03	0.00	0.00	0.01	0.07	0.00	0.00	0.10
54	0.00	0.00	0.03	0.00	0.00	0.01	0.07	0.00	0.00	90.0
56	0.00	0.00	0.01	0.01	0.00	0.00	0.03	0.00	0.00	0.04
85	00.0	0.00	0.01	0.20	0.00	0.00	0.01	0.00	0.00	0.04
09	00.0	0.00	0.02	0.93	0.00	0.00	0.00	0.00	0.00	0.02
62	0.01	00'0	0.01	0.44	0.00	0.00	0.00	0.00	0.00	0.02
64	00.0	00'0	0.00	92.0	0.00	0.00	0.00	0.00	0.00	0.02
99	00.0	00.0	0.00	0.08	0.00	0.00	0.00	0.00	0.00	0.01
89	00.0	00.0	0.01	0.05	0.00	0.00	0.00	0.00	0.00	0.01
02	00.0	00'0	0.00	0.00	0.00	0.00	00.00	0.00	0.00	0.01
72	00.0	00.0	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01
74	00.0	00.0	0.00	0.14	0.00	0.00	0.00	0.00	0.00	0.00
92	00.0	00'0	0.00	09.0	0.00	0.00	0.00	0.00	0.00	0.00
82	00.0	00'0	0.00	0.13	0.00	0.00	00.00	0.00	0.00	0.00
08	00.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
82	00.0	00.0	0.00	0.00	0.00	0.00	00.00	0.00	0.00	0.00

Table H-22. M-E PDG Default Tandem Axle Load Spectra

					Vehi	Vehicle Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
9	5.88	7.06	5.28	13.76	18.93	2.78	2.45	7.93	5.23	6.42
80	1.44	35.44	8.43	6.72	8.07	3.92	2.19	3.15	1.75	3.85
10	1.94	13.24	10.83	6.50	11.17	6.52	3.65	5.21	3.35	5.59
12	2.73	6.32	8.99	3.46	11.87	7.62	5.40	8.23	5.89	5.67
14	3.63	4.33	7.72	7.07	10.53	7.75	06.9	8.88	8.73	5.74
16	4.96	5.08	7.50	4.83	8.26	7.01	7.49	8.45	8:38	5.54
18	7.95	5.05	92.9	4.97	87.9	5.83	66.9	7.08	9.77	4.90
20	11.58	4.39	90.9	4.58	5.33	5.60	6.62	5.49	10.84	4.50
22	14.20	2.31	5.71	4.26	4.13	5.17	6.26	5.14	10.78	6.45
24	13.15	2.28	5.17	3.85	3.12	5.05	5.95	5.99	7.24	4.77
26	10.73	1.53	4.52	3.44	2.34	5.28	6.16	5.73	6.14	4.34
28	7.47	1.96	3.90	6.03	1.82	5.53	6.54	4.37	4.93	5.63
30	5.08	1.89	3.21	3.68	1.58	6.13	6.24	6.58	3.93	7.24
32	3.12	2.19	3.91	2.98	1.20	6.28	5.92	4.61	3.09	4.69
34	1.87	1.74	2.12	2.89	1.05	2.67	4.99	4.48	2.74	4.51
36	1.30	1.78	1.74	2.54	0.94	4.46	3.63	2.91	1.73	3.93
38	0.76	1.67	1.44	2.66	0.56	3.16	2.79	1.83	1.32	4.20
40	0.53	0.38	1.26	2.50	0.64	2.13	2.24	1.12	1.07	3.22
42	0.52	0.36	1.01	1.57	0.28	1.41	1.69	0.84	0.58	2.28
44	0.30	0.19	0.83	1.53	0.28	0.91	1.26	89.0	0.51	1.77
46	0.21	0.13	0.71	2.13	0.41	0.59	1.54	0.32	0.43	1.23
48	0.18	0.13	0.63	1.89	0.20	0.39	0.73	0.21	0.22	0.85

Table H-22. (cont'd)

	!			-	1 able f1-22. (colif u)	cont a)				
					Vehi	Vehicle Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
20	0.11	0.14	0.49	1.17	0.14	0.26	0.57	0.21	0.22	0.64
52	90.0	0.20	0.39	1.07	0.11	0.17	0.40	0.07	0.23	0.39
54	0.04	90.0	0.32	0.87	90.0	0.11	0.38	0.13	0.20	09:0
99	0.08	90.0	0.26	0.81	0.05	0.08	0.25	0.15	0.12	0.26
58	0.01	0.02	0.19	0.47	0.03	0.05	0.16	0.09	0.07	0.18
09	0.02	0.02	0.17	0.49	0.02	0.03	0.15	0.03	0.19	0.08
62	0.10	0.01	0.13	0.38	90.0	0.02	60.0	90.0	0.09	0.14
2	0.01	0.01	80.0	0.24	0.02	0.02	0.08	0.01	0.04	0.07
99	0.02	0.00	90.0	0.15	0.02	0.02	90.0	0.01	0.02	0.08
89	0.01	0.00	0.07	0.16	0.00	0.03	0.05	0.01	0.04	0.03
70	0.01	0.02	0.04	90.0	00.0	0.01	0.11	0.00	0.12	0.01
72	0.00	0.01	0.04	0.13	00.0	0.01	0.04	0.00	0.00	0.04
74	0.00	0.00	0.02	90.0	00.0	0.01	0.01	0.00	0.00	0.02
92	0.00	0.00	0.01	90.0	00.0	0.00	0.01	0.00	0.00	0.04
78	0.00	0.00	00.0	0.03	00.0	0.00	0.01	0.00	0.01	0.02
80	00.0	0.00	00.0	0.02	00.0	0.00	0.00	0.00	0.00	0.08
82	0.00	0.00	0.00	0.00	0.00	00'0	0.00	0.00	0.00	0.00
				A						

Table H-30. Cluster 2 Quad Axle Load Spectra

					Vehic	Vehicle Class				
Load (kips)	4	5	9	7	8	6	10	11	12	13
12	99.99	48.31	29.50	0.72	20.89	59.19	1.34	23.31	13.28	1.26
15	0.00	1.07	9.20	0.85	2.33	13.03	2.96	20.89	6.38	2.62
18	0.00	0.43	7.60	99.0	3.34	7.89	5.82	15.88	6.74	4.10
21	0.00	0.15	10.36	1.30	4.26	6.51	7.50	12.00	00.9	4.54
24	0.00	0.73	4.73	2.61	3.71	2.78	86°L	5.80	4.37	3.89
27	0.00	3.12	3.55	2.31	4.32	1.87	6.95	2.61	4.53	3.64
30	00.0	3.83	6.27	3.43	5.24	2.51	5.92	2.08	8.01	3.21
33	0.00	0.70	4.18	5.23	4.89	1.02	4.08	2.06	5.61	2.50
36	0.00	15.61	2.11	6.44	3.91	99.0	3.37	2.94	6.25	2.32
39	0.00	0.70	2.22	76.7	5.00	0.55	2.89	1.10	8.04	2.16
42	26.67	3.47	1.79	9.55	3.99	0.59	2.28	2.98	6.70	2.32
45	6.67	2.93	1.70	11.87	4.53	0.84	2.28	1.95	80.9	3.38
48	0.00	3.33	1.19	13.02	4.96	0.36	2.36	1.87	3.48	4.40
51	0.00	1.78	3.12	10.61	4.98	0.46	2.41	0.72	5.81	4.74
54	0.00	4.47	0.96	9.00	5.98	0.27	2.73	1.27	2.22	5.78
57	0.00	0.00	0.00	5.92	5.00	0.23	3.30	0.41	0.98	5.66
09	0.00	0.00	0.10	2.99	3.10	0.32	3.72	0.40	0.89	4.87
63	0.00	00.0	2.09	1.90	1.51	0.12	4.14	0.16	96.0	4.61
99	0.00	0.00	1.96	1.01	1.40	0.10	3.51	0.99	1.39	3.54
69	0.00	6.24	1.47	0.81	1.59	0.25	3.40	0.20	0.38	3.35
72	0.00	00.00	2.94	0.56	1.16	0.12	2.73	0.38	0.11	2.69
75	0.00	0.00	0.02	0.32	0.99	0.09	2.14	0.00	0.08	2.32

Table H-24. (cont'd)

				7 7	1 more 11-4-to (conte m)	Out a)				
					Vehic	Vehicle Class				
Load (kips)	4	2	9	7	8	6	10	11	12	13
78	0.00	0.00	0.00	00.0	1.12	0.07	0.03	0.00	0.23	0.09
81	0.00	0.00	1.47	0.00	1.42	0.05	0.05	0.00	0.20	0.05
84	0.00	3.13	0.00	00.0	90.0	0.02	0.01	0.00	0.41	0.03
87	0.00	0.00	0.45	0.00	0.05	0.04	0.00	0.00	0.07	0.03
90	0.00	0.00	0.00	00.0	0.10	0.02	0.00	0.00	0.09	0.01
93	0.00	0.00	0.04	00.0	0.01	0.02	0.00	0.00	0.35	0.02
96	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.03	0.01
99	0.00	0.00	0.98	0.00	0.10	0.00	0.01	0.00	0.10	0.01
102	0.00	0.00	0.00	0.01	90.0	0.00	0.00	0.00	0.23	0.03
*Note: Only, 1707 10 and 12 and about a	10 02	d 12 0.0 ch		A Care to a	The most and I I DIO Defemble	.160				

\*Note: Only VC 7, 10 and 13 are changed. The rest are M-E PDG Defaults

**Appendix I**Cluster Matrix

Table I-1. Cluster Grouping Matrix

All Quad ALS Group	4	3			EX	2	2	4	1	1	2	1	4	EX	2	2	1	2
All Tridem ALS Group	3	3			3	2	2	1	3	EX	3	2	3	3	2	1	2	3
All Tandem ALS Group	5	4			5	5	3	3	3	1	2	2	3	2	1	3	2	3
All Single ALS Group	3	2			2	2	3	2	2	3	1	1	2	2	1	3	1	2
Quad AGPV Group	5	EX			EX	5	3	3	4	5	5	5	2	4	2	4	5	4
Trid. AGP V Group	4	4			4	4	2	2	-	1	4	1	1	1	1	4	-	4
Tan. AGP V Group	3	3			3	3	3	8	2	2	3	2	1	2	EX	EX	2	EX
Single AGP V	3	3			EX	2	3	3	3	3	3	3	1	1	EX	EX	3	EX
MDF (11-13)	5	5	4	4	5	4	4	4	4	EX	2	2	EX	1	EX	EX	4	EX
MDF (8-10)	4	4	4	-	4	4	4	4	4	4	4	4	3	4	4	4	3	1
MDF (4-7)	3	EX	3	3	3	3	1	EX	2	2	2	1	2	2	3	EX	2	1
HOH	3	3		3	7	2	7	3	3	3	2	3	2	3	2	3	2	3
HHO	3	3	-	2	2	2	3	3	2	3	2	2	2	2	1	3	2	3
44011	1	1	-	1	1	1	1	1	1	1	1	2	2	1	2	1	2	
Site	1459	1529	2029	2209	5229	4046	4129	6414	4229	4249	5019	6505	5249	5289	5299	6019	6159	6306

	All Quad ALS Group	2	2	2	1	2		EX	2	1		3	1	1	3	1	7	2	2	3
	All Tridem ALS Group	-	2	EX	3	1		3	1	1		1	1	3	1	2	3	1	1	1
	All Tandem ALS Group	4	3	1	3	4		3	4	5		3	4	2	4	2	3	2	5	4
	All Single ALS Group	_	2	1	2	1		2	1	1		2	1	2	2	1	2	3	1	2
	Quad AGPV Group	-	3	П	4	3		5	5	1		4	5	4	2	5	3	2	5	4
( <b>p</b> ,	Trid. AGP V Group	3	2	3	1	_		2	1	3		1	1	1	1	1	2	1	1	1
Table I-1. (cont'd)	Tan. AGP V Group	2	3	-	2	2		2	2	2		3	2	2	1	2	2	-	1	1
Table 1	Single AGP V	2	3	2	1	2		2	3	3		3	3	3	-	3	3	-	3	3
	MDF (11-13)	1	3	4	1	4	EX	3	3	3	EX	2	1	1	EX	1	2	EX	1	1
	MDF (8-10)	3	3	2	2	2	4	3	3	3	2	4	3	3	4	EX	4	1	3	3
	MDF (4-7)	1	2	2	2	2	1	2	EX	2	EX	1	2	1	1	1	2	1	2	1
	НОН	-	2	3	3	1	1	2	1	1	3	3	2	2	2	2	2	3	1	2
	L H D	1	2	1	2	1	1	2	1	1	2	2	1	2	2	1	2	3	1	1
	AADHH	2	1	2	1	8	1	1	3	3	1	1	2	1	2	2	2	1	3	2
	Site	6369	6459	6469	6479	7029	6902	7109	7159	7269	7329	8029	8049	8129	8209	8219	8229	8440	8729	8829

	All Quad ALS Group	3	3	2	
	All Tridem ALS Group	1	1	1	
	All Tandem ALS Group	4	1	2	
	All Single ALS Group	1	1	2	
	Quad AGPV Group	4	2	5	
(p,1	Trid. AGP V Group	1	1	1	
Table I-1. (cont'd)	Tan. AGP V Group	1	1	2	
Table	Single AGP V	1	1	3	
	MDF (11-13)	EX	2	4	
	MDF (8-10)	4	3	4	
	MDF (4-7)	1	EX	1	
	HOT	2	2	3	-
	H H O	-	2	3	
	AADTT	2	3	1	·
	Site	6816	9209	9759	0000

# References

### REFERENCES

- 1. Guide for Mechanistic-Empirical Design of New and Rehabilitated Pavement Structures. Final Report, NCHRP Project 1-37A. TRB, National Research Council, Washington D.C., March 2004. <a href="http://www.trb.org/mepdg/guide.htm">http://www.trb.org/mepdg/guide.htm</a>
- 2. Lu, Q., and J.T. Harvey. "Characterization of Truck Traffic in California for Mechanistic-Empirical Design." *Transportation Research Record: Journal of the Transportation Research Board, No. 1945*, TRB, National Research Council, Washington, D.C. 2006. pp. 61-72.
- 3. NCHRP, NCHRP Report 538: Traffic Data Collection, Analysis and Forecasting for Mechanistic Pavement Design. NCHRP 1-39. TRB, National Research Council, Washington, D.C. 2005.
- 4. Papagiannakis, A., Bracher, M., Li, J., and Jackson, N. (2006). "Sensitivity of NCHRP 1-37A Pavement Design to Traffic Input." *Transportation Research Record: Journal of the Transportation Research Board*, 1945(-1), 49-55.
- 5. United States Department of Transportation (USDOT). *Traffic Monitoring Guide*." 2001. FHWA, Washington, D.C.
- 6. Hallenbeck, M and H. Weinblatt. NCHRP Report 509: Equipment for Collecting Traffic Load Data. Transportation Research Board of the National Academies, Washington, D.C., 2004.
- 7. Prozzi, J.A., Hong, Feng and Arthur Leung "Effect of Traffic Load Measurement Bias on Pavement Life Prediction." *Transportation Research Record: Journal of the Transportation Research Board*, No. 2087. Transportation Research Board of the National Academies, Washington, D.C. 2008. pp. 91-98.
- 8. Guide to LTPP Traffic Data Collection and Processing. FHWA, U.S. Department of Transportation, Washington, D.C., 2001
- 9. Tran N., Hall, K., "Development and Significance of Statewide Volume Adjustment Factors in Mechanistic-Empirical Pavement Design Guide." TRB No.2037. Transportation Research Board of the National Academies, Washington D.C. 2007. pp. 97-105.
- 10. Pappagiannakis, A.T., Bracher, M., and Jackson N. (2006) "Utilizing Clustering Techniques in Estimating Traffic Data Input for Pavement Design." *J. Transp Eng.*, 132(11), 872-879
- 11. Tam, W. and Harold Von Quintos. "Use of Long-Term Pavement Performance Data to Develop Traffic Defaults in Support of Mechanistic-Empirical Pavement Design Procedures." *Transportation Research Record: Journal of the*

- Transportation Research Board, No. 1855. TRB, National Research Council, Washington, D.C. 2003. pp. 176-182.
- 12. Lu, Q., Zhang, Y., and J.T. Harvey. "Estimation of Truck Traffic Inputs for M-E Pavement Design in California." TRB, National Research Council, Washington D.C., March 2004.
- 13. Tran N. and Kevin Hall. "Development and Influence of Statewide Axle Load Spectra on Flexible Performance." TRB No.2037. Transportation Research Board of the National Academies, Washington D.C. 2007. pp. 106-114.
- 14. Timm, D., Bower, J. and Rod Turochy. "Effect of Load Spectra on Mechanistic-Empirical Flexible Pavement Design." *Transportation Research Record: Journal* of the Transportation Research Board, No. 1947, Transportation Research Board of the National Academies, Washington, D.C. 2006. pp. 146-154
- 15. Turochy, R., Baker, M. and David Timm. "Spatial and Temporal Variations in Axle Load Spectra and Impacts on Pavement Design." *Journal of Transportation Engineering*, Vol. 131, No. 10. 2005, pp. 802-808.
- 16. Wang, Y., Hancher D., and Kamyar Mahboub. "Axle Load Distribution for Mechanistic-Empirical Pavement Design." *Journal of Transportation Engineering*, Vol. 133, No. 8 2007, pp. 469-479.
- 17. Kim, J. R., Titus-Glover, L., Darter, M.I. and Robert Kumapley. "Axle Load Distribution Characterization for Mechanistic Pavement Design." *Transportation Research Record: Journal of the Transportation Research Board, No. 1629*, Transportation Research Board of the National Academies, Washington, D.C. 1998. pp. 13-23.
- 18. Michigan Center for Truck Safety. *Truck Driver's Guidebook*. April 2009. <a href="http://www.truckingsafety.org/PDF/Guidebook/GB11th.pdf">http://www.truckingsafety.org/PDF/Guidebook/GB11th.pdf</a>> 25 May 2009
- 19. Haider, S. W., and Harichandran, R. S. (2007). "Characterizing Axle Load Spectra by Using Gross Vehicle Weights and Truck Traffic Volumes." CD ROM, 86th Annual Meeting of Transportation Research Record
- 20. Buch, N., Chatti, K, Haider, S.W., Manik, A. Research Report RC-1516: Evaluation of the 1-37A Design Process for New and Rehabilitated JPCP and HMA Pavements. Michigan State University Dept. of Civil and Environmental Engineering. Oct. 2008.
- 21. Norusis, Marija and SPSS, Inc. <u>SPSS 15.0 Statistical Procedures Companion</u>. Chapter 16. Prentice Hall. 2008. <a href="http://www.norusis.com/pdf/SPC\_v13.pdf">http://www.norusis.com/pdf/SPC\_v13.pdf</a>>

- 22. "Cluster Analysis." <u>Statistics Methods and Applications</u> 2008. Statsoft. 10 Oct. 2008. <a href="http://www.statsoft.com/textbook/stcluan.html">http://www.statsoft.com/textbook/stcluan.html</a>>Garson, David G.,
- 23. "Discriminant Analysis," 2008. North Carolina State University. 3 Jun. 2009. <a href="http://faculty.chass.ncsu.edu/garson/PA765/discrim.htm">http://faculty.chass.ncsu.edu/garson/PA765/discrim.htm</a>.
- 24. Devore, Jay and Nicholas Farnum. <u>Applied Statistics for Engineers and Scientists</u>. Belmont:Thompson Brooks/Cole, 2005.

ŧ